INCH-POUND


MIL-DTL-15098/3C
10 August 2020
SUPERSEDING
MIL-DTL-15098/3B
23 August 2010

DETAIL SPECIFICATION SHEET

LAMPS, GLOW, INDICATOR, TYPES W1A AND R2A

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-15098, "Lamps, Glow, General Specification for".

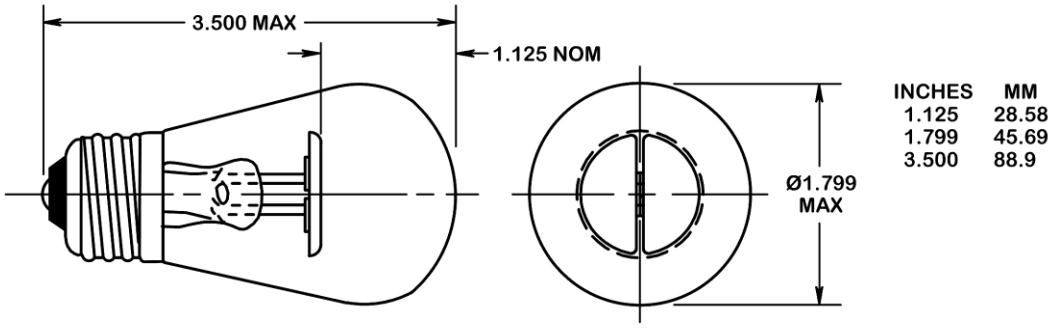

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 1. Indicator glow lamp, types W1A and R2A.

REQUIREMENTS:

Design and configuration: See figure 1 and table I.
Vibration: Not applicable.
Shock: Method II of MIL-DTL-15098.
Part number: M15098/3 - (Dash number from table I).

AMSC N/A FSC 6240

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:31Z
Check the source to verify that this is the current version before use.

3D Model (Dash Number 001) for reference only.
To see inside of the bulb, the bulb can be made transparent. Select (left-click) the bulb, then right-click the bulb and use the "Part Options" tab to make the bulb transparent.

FIGURE 1. Indicator glow lamp, types W1A and R2A - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:31Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and characteristics.

Characteristic	Dash no.	
	001	002
Bulb shape and size	S14	S14
Maximum overall length (inches)	3.500	3.500
Base	M	M
Electrode shape	P2	P2
Distance from end of electrode to end of bulb (inches, nominal)	1.125	1.125
Series resistor		
Ohms (nominal)	3,500	3,500
Location	In base	In base
Characteristic gas	Argon	Neon
Glow color	Blue	Red
Watts (nominal)	2	2
Application	Indicator	Indicator
Circuit volts	105 - 125 AC	105 - 125 AC
Maximum initial starting voltage (volts)		
In light (maximum)	75 AC, 110 DC	65 AC, 90 DC
Design current (milliamperes)	18	18
Initial light output (lumens)	Not applicable	0.75
Average life at design current (hours)	Not applicable	10,000
Industry number		
ANSI	W1A	R2A
Former lamp number	AR-1	NE-34

CHANGES FROM PREVIOUS ISSUE. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:31Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - SH
Air Force - 71
DLA - GS

Review Activities:
Army - CR4, MI
Navy - EC

Preparing Activity:
DLA - GS2

(Project 6240-2020-013)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:31Z
Check the source to verify that this is the current version before use.