INCH-POUND


MIL-DTL-15098/6D
10 August 2020
SUPERSEDING
MIL-DTL-15098/6C
23 August 2010

DETAIL SPECIFICATION SHEET

LAMPS, GLOW, INDICATOR, TYPES J3A AND B9A

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-15098, "Lamps, Glow, General Specification for".

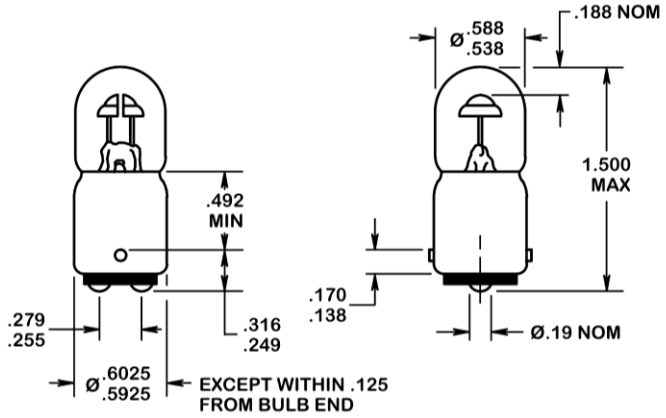

INCHES	MM
.025	0.64
.071	1.8
.087	2.21
.125	3.18
.138	3.51
.170	4.32
.188	4.78
.19	4.8
.249	6.32
.255	6.48

INCHES	MM
.279	7.09
.316	8.03
.492	12.5
.538	13.67
.588	14.94
.5925	15.05
.6025	15.304
.616	15.65
.636	16.15
.668	16.97
1.500	38.1

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 1. Indicator glow lamp, types J3A and B9A.

AMSC N/A FSC 6240

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:32Z
Check the source to verify that this is the current version before use.

3D Model (Dash Number 001) for reference only.
To see inside of the bulb, the bulb can be made transparent. Select (left-click) the bulb, then right-click the bulb and use the "Part Options" tab to make the bulb transparent.

FIGURE 1. Indicator glow lamp, types J3A and B9A - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:32Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and configuration: See figure 1 and table I.
Vibration: Applicable.
Shock: Method II of MIL-DTL-15098.
Part number: M15098/6 - (Dash number from table I).

TABLE I. Dash numbers and characteristics.

Characteristic	Dash no.	
	001	002
Bulb shape and size	T 4-1/2	T 4-1/2
Maximum overall length (inch)	1.500	1.500
Base	DCB	DCB
Electrode shape	P3	P3
Distance from end of electrode to end of bulb (inch, nominal)	0.188	0.188
Series resistor		
Ohms (nominal)	15,000	30,000
Location	External	External
Characteristic gas	Argon	Neon
Glow color	Blue	Red
Watts (nominal)	0.25	0.25
Application	Indicator	Indicator
Nominal circuit voltage (volts)	120 AC, 150 DC	120 AC
Maximum initial starting voltage (volts)		
In light	85 AC, 120 DC	65 AC, 90 DC
Design current (milliamperes)	3.5	2
Initial light output (lumens)	Not applicable	0.10
Average life at design current (hours)	Not applicable	7,500
Industry number		
ANSI	J3A	B9A
Former industry number	AR-4	NE-48

CHANGES FROM PREVIOUS ISSUE. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:32Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - SH
Air Force - 71
DLA - GS

Preparing Activity:
DLA - GS2

(Project 6240-2020-016)

Review Activities:
Army - AR, CR4, MI
Navy - AS, CG, MC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:32Z
Check the source to verify that this is the current version before use.