INCH-POUND

MIL-DTL-15098/9D
10 August 2020
SUPERSEDING
MIL-DTL-15098/9C
23 August 2010

DETAIL SPECIFICATION SHEET

LAMP, GLOW, INDICATOR, TYPE R9A


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-15098, "Lamps, Glow, General Specification for".

AMSC N/A FSC 6240

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:33Z
Check the source to verify that this is the current version before use.

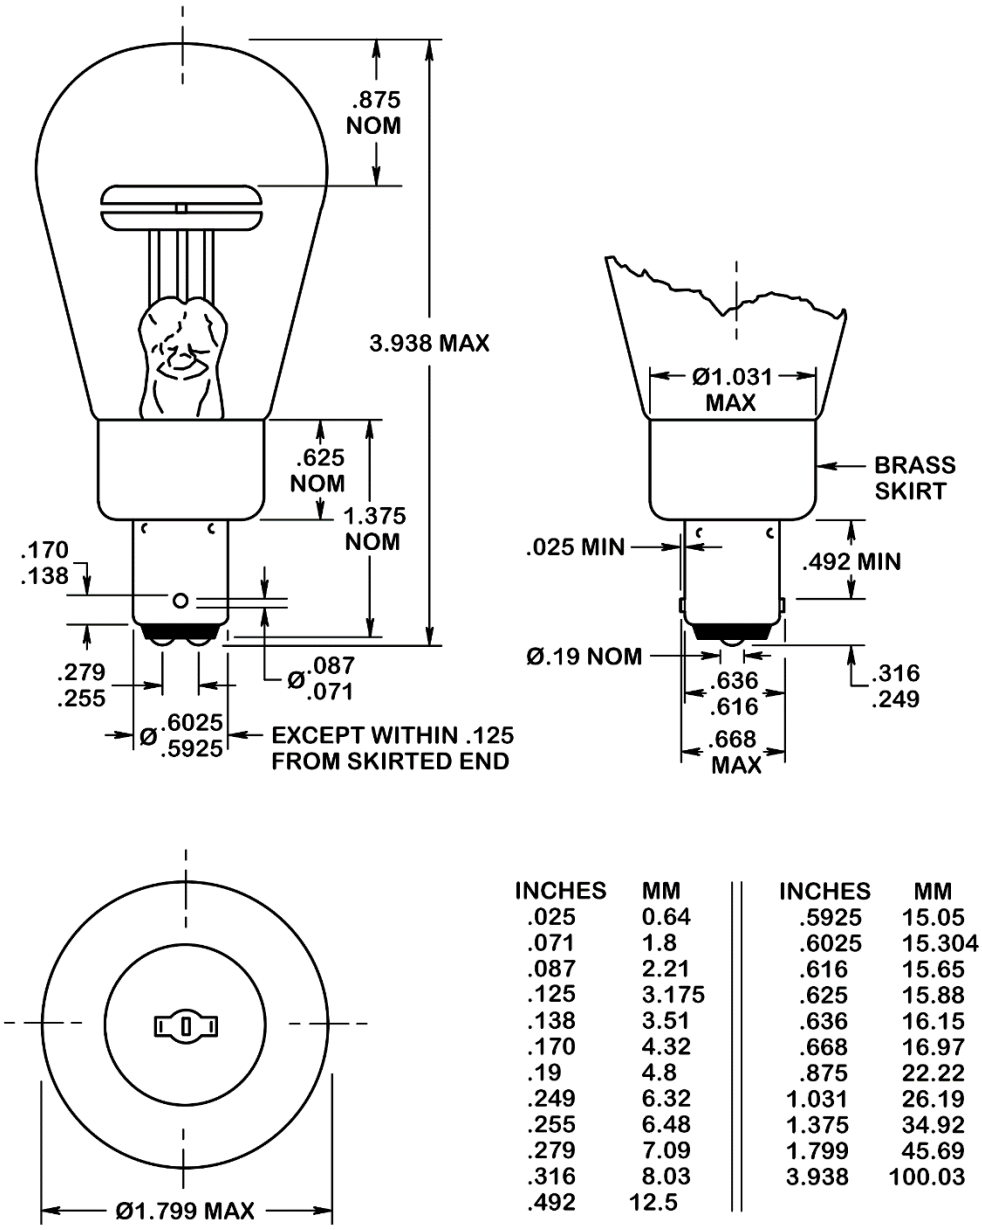

INCHES	MM	INCHES	MM
.025	0.64	.5925	15.05
.071	1.8	.6025	15.304
.087	2.21	.616	15.65
.125	3.175	.625	15.88
.138	3.51	.636	16.15
.170	4.32	.668	16.97
.19	4.8	.875	22.22
.249	6.32	1.031	26.19
.255	6.48	1.375	34.92
.279	7.09	1.799	45.69
.316	8.03	3.938	100.03
.492	12.5		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 1. Indicator glow lamp, type R9A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:33Z
Check the source to verify that this is the current version before use.

3D Model for reference only.
To see inside of the bulb, the bulb can be made transparent. Select (left-click) the bulb, then right-click the bulb and use the "Part Options" tab to make the bulb transparent.

FIGURE 1. Indicator glow lamp, type R9A - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:33Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and configuration: See figure 1 and table I.
Vibration: Not applicable.
Shock: Method II of MIL-DTL-15098.
Part number: M15098/9 - 001.

TABLE I. Characteristics and specifications.

Characteristic	Specification
Bulb shape and size	S14
Maximum overall length (inch)	3.938
Base	DCBS
Electrode shape	P4
Distance from end of electrode to end of bulb (inches, nominal)	0.875
Series resistor	
Ohms	2,200
Location	External
Characteristic gas	Neon
Glow color	Red
Watts (nominal)	3
Application	Indicator
Nominal circuit voltage (volts)	120 AC
Maximum initial starting voltage (volts)	
In light	60 AC, 85 DC
Design current (milliamperes)	25
Initial light output (lumens)	1.15
Average life at design current (hours)	10,000
Industry number	
ANSI	R9A
Former industry number	NE-42

CHANGES FROM PREVIOUS ISSUE. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:33Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - SH
Air Force - 71
DLA - GS

Review Activities:
Army - AR, CR4, MI
Navy - AS, CG, MC

Preparing Activity:
DLA - GS2

(Project 6240-2020-019)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:33Z
Check the source to verify that this is the current version before use.