MILITARY SPECIFICATION
CALIBRATOR SET, MISSILE SYSTEM TEST EQUIPMENT

AN/ASM-624

This specification is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the performance, design, manufacture, and acceptance requirements for the Calibrator Set, Missile System Test Equipment, AN/ASM-624, hereafter referred to as calibrator set. Only one type of calibrator set is covered by this specification. The calibrator set is intended to be used to calibrate AN/AWM-23(V) at the intermediate level of maintenance aboard ship, at a shore station, and at the depot.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the exact issue shown form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

TT-P-1757 14 August 1972	Primer Coating, Zinc Chromate, Low Moisture Sensitivity

Military

MIL-S-8512D Amendment 1 22 Apr 1977	Support Equipment, Aeronautical, Special General Specification for the Design of
MIL-E-15090B(2) 29 Feb 1956	Enamel, Equipment, Light-Gray (Formula No. 111)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document, should be addressed to: Commanding Officer, Naval Air Engineering Center, Engineering Specifications and Standards Department (ESSD) Code 93, Lakehurst, NJ 08733, by using the self addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 4935

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS (Continued)

Military

MIL-E-17555G(2) 15 Apr 1970	Electronic and Electrical Equipment, Accessories, and Repair Parts; Packaging and Packing of
MIL-N-18307F 4 Aug 1978	Nomenclature and Identification for Electronic, Aeronautical, and Aeronautical Support Equipment including Ground Support Equipment
MIL-T-28800B(1) 20 Jul 1977	Test Equipment for use with Electrical and Electronic Equipment; General Specification for
MIL-C-45662A 9 Feb 1962	Calibration System Requirements
MIL-F-81334B 5 Jul 1977	Foam, Plastic, Flexible, Open Cell, Polyester Type Polyurethane

STANDARDS

Military

MIL-STD-209E 13 Sep 1976	Slinging and Tiedown Provisions for Lifting and Tying Down Military Equipment
MIL-STD-454F 5 Mar 1978	Standard General Requirements for Electronic Equipment
MIL-STD-810C 10 Mar 1975	Environmental Test Methods
MIL-STD-882A 28 Jun 1977	System Safety Program Requirements
MIL-STD-1653 Change 1 24 Sep 1975	Power Cable Assemblies
MS 51830A 25 Nov 1970	Insert, Screw Thread - Locked In, Key Locked, Regular Duty
MS 51831A 25 Nov 1970	Insert, Screw Thread - Locked In, Key Locked, Heavy Duty

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

DRAWINGS

NAVAIR Engineering Support Office
North Island

150000	Calibrator Set
150001	Test Unit No. 1 of AN/ASM-624
150004	Test Unit No. 2 of AN/ASM-624
150050	Harmonic Generator
150051	Bandpass Filter
150057	Special Cable


2.1.1 Availability of government documents. When requesting specifications, standards, drawings and publications, refer to both title and number. Copies of applicable documents required by contractors in connection with specific procurement may be obtained as follows:

a. Copies of Federal and Military Specifications and Military Standards may be obtained upon application to the Commanding Officer, Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120.

b. Copies of NAVAIR Engineering Support Office, North Island drawings may be obtained upon application to the Commanding Officer, Naval Air Rework Facility, Naval Air Station, North Island, San Diego, CA 92135.

2.2 Document tier. The contractor's responsibility for document compliance does not extend beyond tier III as indicated by the following.

TIER I	Contract Specifications
TIER II	Applicable Documents (2.1 of Contract Specification)
TIER III	Documents Referenced Tier II Applicable Documents

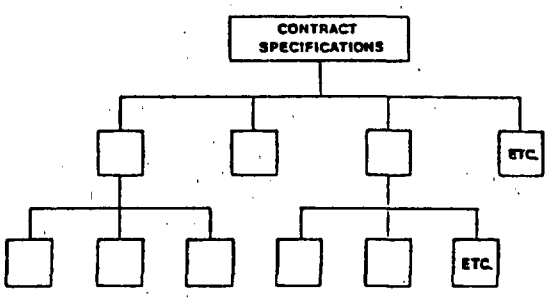

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Item definition. The calibrator set is classified as a type III, class 4 equipment in accordance with MIL-T-28800. The physical arrangement of the calibrator set, consisting of the test units and the mobile storage unit is shown in 150000. The calibrator set is a unit consisting of calibration standards to be used for the calibration of the Commercial Test Equipment (CTE) that is mounted in the AN/AWM-23(V) test stations. The calibrator set consists of:

a. Test Unit No. 1, AN/ASM-624 includes the major components as annotated in Table II.

b. Test Unit No. 2, AN/ASM-624 includes the major components as annotated in Table II.

c. Mobile Storage Unit, Part of AN/ASM-624. (See 3.2.2.3 through 3.2.2.3.14)

d. Accessories listed in Table I.

3.1.1 Interface definition. The calibrator set shall provide the following interfaces.

3.1.1.1 Functional interface. The calibrator set shall provide the following input-output test signals:

a. Time Frequency Standard
b. Alternating Current/Direct Current Voltage Standard
c. Resistance Standard
d. Phase Standard
e. Sine, Square and Pulse Signals
f. True RMS Voltage Measurements
g. RF Power Measurements

3.1.1.2 Physical interface. The physical interface of test unit number 1 and test unit number 2 shall be in accordance with 150001 and 150004.

3.2 Characteristics.

3.2.1 Performance. The calibrator set shall be capable of calibrating the AN/AWM-23 CTE listed in Table III. The performance of the calibrator set shall be in accordance with Table II. The calibration performance shall consist of calibration of all the commercial test equipment (CTE) listed in Table III, and as installed in the following five AN/AWM-23(V) test stations:

a. computer test station
b. module test station
c. low frequency test station
d. radio frequency test station
e. controls and display test station

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

During calibration performance, the first article of the calibrator set shall identify any items of CTE out of calibration or that have a malfunction.

3.2.2 Physical.

3.2.2.1 Test unit no. 1, AN/ASM-624. Test unit no. 1 shall be in accordance with MIL-T-28800 type III, class 4, style C and 150001.

3.2.2.2 Test unit no. 2, AN/ASM-624. Test unit no. 2 shall be in accordance with MIL-T-28800 type III, class 4, style C and 150004.

3.2.2.3 Mobile storage cabinet, AN/ASM-624.

3.2.2.3.1 General. The mobile storage cabinet shall be in accordance with MIL-T-28800 type III, class 4, style G. The mobile storage cabinet, hereafter referred to as the cabinet, shall be in accordance with MIL-STD-454, Requirement 55, and the requirements of this specification. Figure 1 provides a conceptual view, and is not an exact engineering design. The cabinet shall have sufficient unobstructed space for mounting the two cases of 150001 and 150004 with lids. The cabinet shall have a front handle capable of withstanding a concentrated force of 150 ±30 pounds (68.038 ± 13.607 kilograms) in any direction, without causing any damage or permanent distortion to the cabinet or handle. The cabinet handle shall be mounted in such a way as not to obstruct the normal operation of the electronic test equipment and case accessory drawers.

3.2.2.3.1.1 Weight. The total empty weight of the cabinet shall not exceed 200 pounds (90.718 kilograms).

3.2.2.3.2 Strength. The cabinet shall be capable of supporting 250 ±50 pounds (113.398 ±22.680 kilograms) excluding the cabinet weight empty but including test unit no. 1, test unit no. 2 (see 3.1) and accessories.

3.2.2.3.3 Dimensions. The cabinet dimensions as shown in Figure 1 shall not exceed the following.

	Maximum	
	Inches	(Centimeters)
Height	36	(91.44)
Width	24	(60.96)
Depth	38	(96.52)

The support bracket width shall not exceed the width of the cabinet. The support bracket depth shall be adequate to hold the cases with the lids installed. The cases and lids when installed on the cabinet shall not protrude beyond the front of the cabinet. The height of the support bracket shall not be higher than the upper rear corner of test unit no. 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

3.2.2.3.4 Drawers. The cabinet shall have two drawers, with two slides per drawer. The inside dimensions of each drawer shall be as follows:

Height		Width		Depth	
Inches	(Centimeters)	Inches	(Centimeters)	Inches	(Centimeters)
6 ±0.030	(15.24 ±0.076)	21 ±0.030	(53.34 ±0.076)	22.5 ±0.030	(57.15 ±0.076)
4 ±0.030	(10.16 ±0.076)	21 ±0.030	(53.34 ±0.076)	22 ±0.030	(55.88 ±0.076)

The drawers shall be vented. The drawers shall be flush with the exterior of the cabinet when in the closed position. The 6x21x22.5 inch drawer shall be mounted above the 4x21x22 inch drawer.

3.2.2.3.4.1 Drawer latches. The drawers shall be mounted in the front of the cabinet and shall have a latching mechanism to prevent accidental opening.

3.2.2.3.4.2 Drawer partitions. The 4 inch high drawer shall have a corner partition of 5 inch by 5 inch ±.030 inch (12.70 cm by 12.70 cm ±0.076 cm) in a front corner of the drawer.

3.2.2.3.4.3 Drawer extension. Each cabinet drawer shall be able to extend completely from the cabinet, in the fully open position, and support a uniformly distributed load of 30 pounds (13.61 kilograms) maximum. Each drawer shall also have a slide stop to prevent inadvertent extraction of the drawer. However, a stop override shall be provided to allow intentional removal of each drawer from the cabinet.

3.2.2.3.4.4 Drawer locks. The cabinet drawers shall have a key lock on each drawer. The same key shall open both drawers. The key shall be removable in the locked and unlocked position.

3.2.2.3.4.5 Drawer insert. The drawers shall be provided with a molded cushion insert, made of polyurethane foam in accordance with MIL-F-81334, color-black, custom fitting for items as annotated in Table I, calibrator set accessories.

3.2.2.3.4.6 Drawer hardware. Drawer handles and locks shall be provided and shall be flush mounted or recessed so as not to protrude beyond the surface of the drawer.

3.2.2.3.5 Lid storage. The cabinet shall have a lid storage compartment capable of stowing four lids for the test units numbers 1 and 2, with two lids each having the following dimensions:

Height		Width	
Inches	(Centimeters)	Inches	(Centimeters)
1.31 ±0.030	(3.327 ±0.0762)	13.34 ±0.030	(33.883 ±0.0762)
1.31 ±0.030	(3.327 ±0.0762)	15.09 ±0.030	(38.328 ±0.0762)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

Length	
Inches	(Centimeters)
20.520 ±0.125	(52.121 ±0.3175)
20.520 ±0.125	(52.121 ±0.3175)

The lid compartment shall be designed to prevent damage or scratching of the lids. The compartment shelves shall be designed to prevent the lids from falling off the shelves due to ship motion and cabinet portability.

3.2.2.3.6 Test set restraint. The cabinet shall include a suitable restraint device to prevent movement of test units numbers 1 and 2 relative to the cabinet during adverse shipboard operations. The device shall not protrude such that it becomes a hazard to personnel or equipment.

3.2.2.3.7 Tiedown provisions. Four tiedown provisions shall be provided on the cabinet in accordance with Type IV, class 2 equipment requirements of MIL-STD-209.

3.2.2.3.8 Fork lift provisions. The cabinet shall be capable of being fork lifted, without damage to the cabinet or its contents, in accordance with the forklifting requirements of MIL-S-8512.

3.2.2.3.9 Threaded inserts. Threaded steel inserts, type MS 51830 or MS 51831 shall be used at all points where a threaded fastener larger than .190 inch (.4826 centimeter) diameter is to be secured to the cabinet without using a self-locking nut. The insert shall not be used where the cabinet metal thickness is less than .25 inch (0.635 centimeter). A steel nut and washer, corrosion resistant, shall be used at such points.

3.2.2.3.10 External power provisions. The cabinet shall be furnished with a permanently attached external power cable (see 3.2.4 1) rated at 115 volts alternating current (ac), 60 hertz (Hz). The power cable shall be mounted in the rear of the cabinet, and shall have a 15 feet (4.572 meters) minimum length, 3 wire power cord. A minimum of nine 3 prong plug sockets with a main 15 ampere circuit breaker is required. Power distribution provisions shall conform to MIL-STD-1653.

3.2.2.3.11 Casters. Casters shall be installed on each lower corner of the cabinet, as shown in Figure 1. The casters shall have either 6 ±0.25 inch (15.24 ±0.635 centimeters) diameter or 8 ±0.25 inch (20.32 ±0.635 centimeters) diameter rubber tread wheels. The two casters on the front end shall be the swivel type, and the two casters on the rear end shall be the rigid type. The casters shall have semi-pneumatic tubeless zero pressure hollow center tires. The two rear casters shall have axle brakes. The casters shall not extend beyond the cabinet in any caster position. Each caster shall have a minimum load rating of 100 pounds (45.36 kilograms).

3.2.2.3.12 Cabinet braking device. The cabinet shall be provided with a wheel type "dead-man" braking device mounted on the front casters capable of

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

securing the cabinet from movement with a fully outfitted calibrator set, at an incline of 14° ± 1° on a tile deck. The braking device shall be controllable from the handle of the cabinet as follows:

a. Brake activation shall be accomplished by the normal release (hands off) of the cabinet handle by the operating personnel.

b. The brake release shall be a one hand device. The maximum one hand grip force shall not exceed 3.5 pounds (1.587 kilograms).

c. Brake deactivation shall be accomplished by a means associated with the grasping of brake lever mounted on the handle of the cabinet by the operating personnel.

3.2.2.3.13 Finish. The cabinet shall be cleaned and zinc chromate applied in accordance with TT-P-1757. Two coats of exterior gray shall be applied in accordance with MIL-E-15090 type III, class II. All cabinet surfaces shall be painted except for drawer locks and pre-finished hardware.

3.2.2.3.14 Drains. All pockets, wells, traps, etc., in which water and condensation can collect when the cabinet is in normal operating position with drawers closed, shall be eliminated or properly drained. No drains shall extend more than 1 inch (2.54 centimeters) below the bottom of the storage cabinet.

3.2.2.4 Accessories. Accessories shall be in accordance with Table I.

3.2.3 Reliability. The reliability of the calibrator set shall be subdivided into the following areas; accessories in Table I, major components of Table II, combination cases (Test Unit No. 1 and No. 2) and the mobile storage unit. The contractor shall propose the reliability requirements for these areas subject to approval of the procuring activity.

3.2.4 Maintainability. The equipment shall be constructed to provide ease of maintenance accessibility, and replacement of parts as specified in MIL-T-28800.

3.2.4.1 Mean time to repair. The calibrator set except for the quartz frequency oscillator HP 105B shall be capable of being restored to normal operation within 4 hours after a malfunction is detected. The quartz frequency oscillator HP 105B shall require 72 hours for oscillator stabilization. The cabinet external power cable (see 3.2.2.3.10) shall be capable of being replaced within 15 minutes.

3.2.5 Environmental conditions. The calibrator set shall operate as specified in Table II under the environmental conditions specified in MIL-T-28800, class 4, except the maximum operating relative humidity shall be 70 percent.

3.2.6 Transportability. The calibrator set shall be capable of being transported by Navy and commercial ground and air transportation means.

3.3 Design and construction.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

3.3.1 Materials, parts and processes. Unless otherwise specified herein, MIL-T-28800 shall apply for materials, parts and processes.

3.3.1.1 Selection of materials, parts and processes. Unless otherwise specified herein, MIL-T-28800 shall apply for the selection of materials, parts and processes.

3.3.1.1.1 Construction. The cabinet shall be constructed of aluminum alloy or steel. The calibrator set shall be sufficiently rigid and durable to withstand normal shipboard service. Zinc alloy die castings and magnesium alloy shall not be used, unless specifically authorized by the procuring activity.

3.3.1.1.2 Metals. Metals shall be of corrosion resistant type or shall be protected to resist corrosion. The use of dissimilar metals separated by suitable insulating material will be permitted.

3.3.1.1.3 Structural welding. Structural welding shall be in accordance with MIL-STD-454, Requirement 13.

3.3.1.2 Approval for nonstandard materials, parts and processes. Approval for the use of nonstandard materials, parts, and processes shall be obtained from the procuring activity. Requests for approval shall be as specified on the Contract Data Requirements List (CDRL) (DD Form 1423).

3.3.2 Electromagnetic interference (EMI). EMI for the calibrator set shall be in accordance with MIL-T-28800, Class 4.

3.3.3 Nomenclature and nameplates. Nomenclature assignment and nameplate approval for calibrator set shall be in accordance with MIL-N-18307.

3.3.4 Interchangeability. Interchangeability shall be in accordance with MIL-STD-454, Requirement 7.

3.3.5 Safety. The calibrator set shall incorporate the safety features required to safeguard personnel and equipment during installation, operation, maintenance, and repair as specified in MIL-T-28800. A hazard analysis and a safety statement shall be made in accordance with MIL-STD-882.

3.3.6 Human engineering. Human engineering shall be in accordance with MIL-STD-454, Requirement 62.

3.3.7 Corrosion protection. Corrosion protection shall be in accordance with MIL-STD-454, Requirement 15.

3.3.8 Caution plate. The caution plate in accordance with 150001 shall be placed on Test Unit No. 1.

3.3.9 Lift requirements. The Test Units in accordance with 150001 and 150004 shall have 1.00 $\pm$ 0.25 inch (2.54 $\pm$ 0.635 centimeters) black letters printed on top of each Test Unit stating the following: "TWO MAN LIFT".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

3.4 Major component characteristics. The calibrator set major components, or their equivalents, functions and characteristics shall be in accordance with Table II.

3.5 First article. The contractor shall furnish the sample unit for first article inspection and approval (see 6.2 and 6.4). The first article model will be tested by the procuring activity for design approval prior to commencing production of remaining units.

3.6 Precedence of documents. When the requirements of the contract, this specification, or applicable subsidiary documents are in conflict, the following precedence shall apply:

a. Contract. The contract shall have precedence over any other document.

b. This specification. This specification shall have precedence over all applicable subsidiary documents.

c. Referenced documents. Any document referenced in this specification shall have precedence over all applicable documents referenced therein.

3.7 Documentation. Documentation requirements shall be as specified in the contract.

3.8 Workmanship. Workmanship shall conform to MIL-STD-454, Requirement 9. All cabinet edges shall be smooth, rounded, and free of sharp edges and burrs.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 General. Adjustments, repairs and maintenance shall not be permitted during testing of the calibrator set. Test procedures formulated and based on this specification shall be approved prior to use in any test of the calibrator set. The calibrator set major component characteristics of Table II shall be measured with the precision instruments certified to be a minimum of three times the accuracy of the variables being measured unless unattainable with existing measuring devices. Deviations from the accuracy requirement shall be subject to Government approval. Calibration shall be traceable to the National Bureau of Standards. Calibration of all measuring and test equipment which control the accuracy of inspection equipment and facilities shall be in accordance with MIL-C-45662. When a test is conducted, a record

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

shall be made of all test data necessary to determine compliance with performance requirements. Test results shall form the basis for acceptance. Verification methods for each requirement of Section 3 herein are shown in Table IV. Unless otherwise specified herein, test conditions and tolerances shall be in accordance with MIL-STD-810.

4.2 Classification of inspections. Inspections shall be classified as follows:

a. Qualification (see 4.4)

b. First article (see 4.5)

c. Quality conformance (see 4.6)

4.3 Inspection conditions. All tests shall be performed under conditions which shall be within the following limits:

a.	Temperature	room ambient (30°C ± 10°C) (86°F ± 18°F)
b.	Altitude	normal ground
c.	Vibration	none
d.	Humidity	room ambient up to 70 percent relative humidity

4.4 Qualification. Qualification shall consist of visual examination, and physical and functional testing of the qualification (design approval) article, as noted in Table IV, and will be conducted in accordance with Navy supplied test procedures.

4.4.1 Qualification sample. The qualification sample shall have the physical and functional characteristics and capabilities necessary to demonstrate that the requirements of this specification have been met.

4.4.1.1 Design approval test plan (DATP). The DATP, as approved by the Navy, shall identify the responsibilities of the participants and establish test schedules for the qualification article.

4.4.2 Qualification inspection. Qualification inspection (Design Approval Test (DAT)) shall consist of calibration performance and environmental testing of all assemblies so indicated in Table IV.

4.4.2.1 Calibration test. The calibration of the AN/AWM-23(V) CTE shall be conducted in accordance with Navy calibration performance checks using the calibrator set.

4.4.2.2 Environmental tests. Environmental tests shall be conducted in accordance with MIL-T-28800 requirements for Class 4, style C, for test units number 1 and 2 cases and style G for the cabinet. Environmental tests shall be conducted on the cabinet less accessories and on the test units

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

number 1 and 2 cases with the commercial test equipment (CTE) replaced with dummy loads.

4.4.2.3 Report. A DAT report shall be prepared at the completion of all testing.

4.4.3 Qualification article approval. Approval of the qualification article by the Navy will be based on the satisfactory completion of all inspections and tests. No additional articles shall be delivered by the contractor prior to Navy approval of the qualification article. Prefabrication of any parts, components, or assemblies prior to Navy approval of the qualification article, and further contractural authorization for additional articles, shall be at the contractor's risk.

4.5 First article. The first article inspection, as noted in Table IV, shall consist of visual examination, and physical and functional testing.

4.5.1 First article sample. The first article sample shall be as specified in the contract.

4.5.2 First article tests. The physical and functional testing of the first article, as noted in Table IV, will be conducted in accordance with Navy supplied test procedures (see 6.2 and 6.4). The calibration of the AN/AWM-23(V) CTE will be conducted by the government. The environmental, physical and functional testing will be conducted by the government.

4.5.3 First article approval. Approval of the first article by the Navy will be based on satisfactory completion of all inspections and tests. No additional articles shall be delivered by the contractor prior to Navy approval of the first article. Prefabrication of any parts, components, or assemblies prior to Navy approval of the first article shall be at the contractor's risk. One approved first article will be returned to the contractor for his use as a quality standard during the fabrication and testing of the articles to be submitted for acceptance under the contract. Final disposition of the returned first article shall be as specified in the contract.

4.6 Quality conformance inspection. This inspection shall include such visual, electrical, and mechanical examination and testing of the calibrator set, materials, subassemblies, parts, and accessories (including source items) during the process of manufacture as may be required to assure that the calibrator set conforms to the requirements of this specification.

4.6.1 Acceptance test plan. The acceptance test plan as approved by the Navy shall identify the responsibilities of the participants and establish demonstration test schedules for in-production articles.

4.6.2 Acceptance test. The acceptance test shall be conducted in accordance with the Navy supplied acceptance test procedures for the production calibrator sets. The acceptance shall verify, as indicated in Table IV, the functional, operational and physical characteristics of the accessories in

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

Table I, major components of Table II, the combination cases (Test Unit No. 1 and No. 2) and the mobile storage cabinet.

4.6.3 In-process data. The data resulting from contractor conducted in-process inspections shall be presented to the Cognizant Government Inspector (CGI) at the time items of the calibrator set are offered for Government inspection and acceptance.

4.6.4 Acceptance test report. The contractor shall present test data, as documented evidence that each calibrator set has completed tests in accordance with the acceptance test plan. Test results shall be recorded on test data sheets by the responsible contractor test personnel and inspected by the contractor quality assurance personnel. A record shall be kept of all failures. The cognizant government inspection representative will witness all acceptance tests.

4.6.5 Acceptance. Upon completion of Government inspection, Government acceptance will be consumated by cognizant Government inspection execution of the DD Form 250.

4.6.6 Test location. Testing, for the purpose of acceptance, shall be conducted at the contractor's facility.

4.7 Methods of examination and test. The methods of examination and test for the qualification sample, the first article sample, and the quality conformance (production) articles shall be as specified below.

4.7.1 Qualification sample. The qualification sample test methods and procedures will be established by the Navy (see 4.4).

4.7.2 First article sample. The first article sample test methods and procedures will be established by the Navy (see 4.5.2).

4.7.3 Production articles. Acceptance test methods and procedures for production articles will be established by the Navy (see 4.6.2).

5. PACKAGING

5.1 General. All major units and parts of the equipment shall be packaged, packed, and marked for shipment in accordance with MIL-E-17555.

6. NOTES

6.1 Intended use. The calibrator set AN/ASM-624 is intended to be used to calibrate AN/AWM-23(V) CTE at the intermediate level of maintenance aboard ship, at a shore station, and at the depot.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification
b. Quantity desired

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

c. Levels of packaging and packing required
d. Any special markings required
e. First article. The first article shall be tested and approved under the appropriate provisions of 7-104.55 of the Armed Services Procurement Regulation. The first article shall be a preproduction sample. The first article shall consist of a complete calibrator set. The contracting officer should include specific instructions in all procurement instruments, regarding arrangements for examinations, test and approval of the first article.

6.3 Abbreviations and acronyms.

ac - alternating current
AM - amplitude modulation
AM-FM - amplitude modulation and frequency modulation
Cal - calibration
CTE - commercial test equipment
DAT - design approval test
dB - decibel
dB/GHz - decibels per gigahertz
dB/°C - decibels per degree Celsius
dB(REL) - decibels (relative)
dBm - decibels referenced to 1 milliwatt in a 50 ohm impedance
dc - direct current
EMI - electromagnetic interference
ext. - external
f - frequency
FM - frequency modulation
GHz - gigahertz
hrs - hours
Hz - hertz
K - kilohm
kΩ - kilohm
kHz - kilohertz
kW - kilowatt
Load R - load regulation
M - megohms
MΩ - megohms
mA - milliamps
MHz - megahertz
min. - minute
ms - millisecond
mV - millivolt
MW - megawatt
mW - milliwatt
mW/°C - milliwatts per degree Celsius
ns - nanosecond
nW - nanowatts
pf - picofarad
P-P - peak to peak
ppm - parts per million

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

ppm/°C - parts per million per degree Celsius
ppm/W - parts per million per watt
pW - picowatt
RF - radio frequency
rms(or RMS) - root mean square
s - second
SWR - standing wave ratio
TTL - Transistor-transistor logic
V - volt
Vdc - volt direct current
V peak - volts peak
V/μ sec - volts per microsecond
V/°C - volts per degree Celsius
W - watt
W/μ sec - watt per microseconds
Z - impedence
μh - microhenries
μsec - microsecond
μV - microvolts
μW - microwatt
Ω - ohms
< - less than
≤ - less than or equal to
> - greater than
≥ - greater than or equal to
$\frac{\Delta f}{f}$ - change in frequency divided by the frequency
° - degree
°C - degrees Celsius
% - percent
%/°C - percent per degree Celsius
@ - at
& - and

6.4 Definitions.

First article. First article includes preproduction sample(s), initial production sample(s), test sample(s), first lot(s), pilot model(s), and pilot lot(s).

Cardinal point. Cardinal point means exact point.

6.5 Data requirements. Deliverable data required by this specification is cited in the following paragraphs:

Paragraph	Data Requirement	Applicable DID
3.3.1.2	Nonstandard Parts Approval Request	DI-E-7028
3.2.3	Proposed Reliability Requirements	UDI-S-23272C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

3.3.5	Hazard Analysis Report	DI-H-7048
3.3.5	Safety Statement	DI-H-1322A
4.4.1.1	Design Approval Test Plan	DI-T-30744
4.4.2.3	Design Approval Test Report	DI-T-21350
4.6.1	Acceptance Test Plan	DI-T-30744
4.6.4	Acceptance Test Report	DI-T-22741A

6.6 Specification cognizance. This specification is under the cognizance of AIR-55213.

Custodian:
Navy - AS

Preparing Activity
Navy - AS
Project No. 4935-N042

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

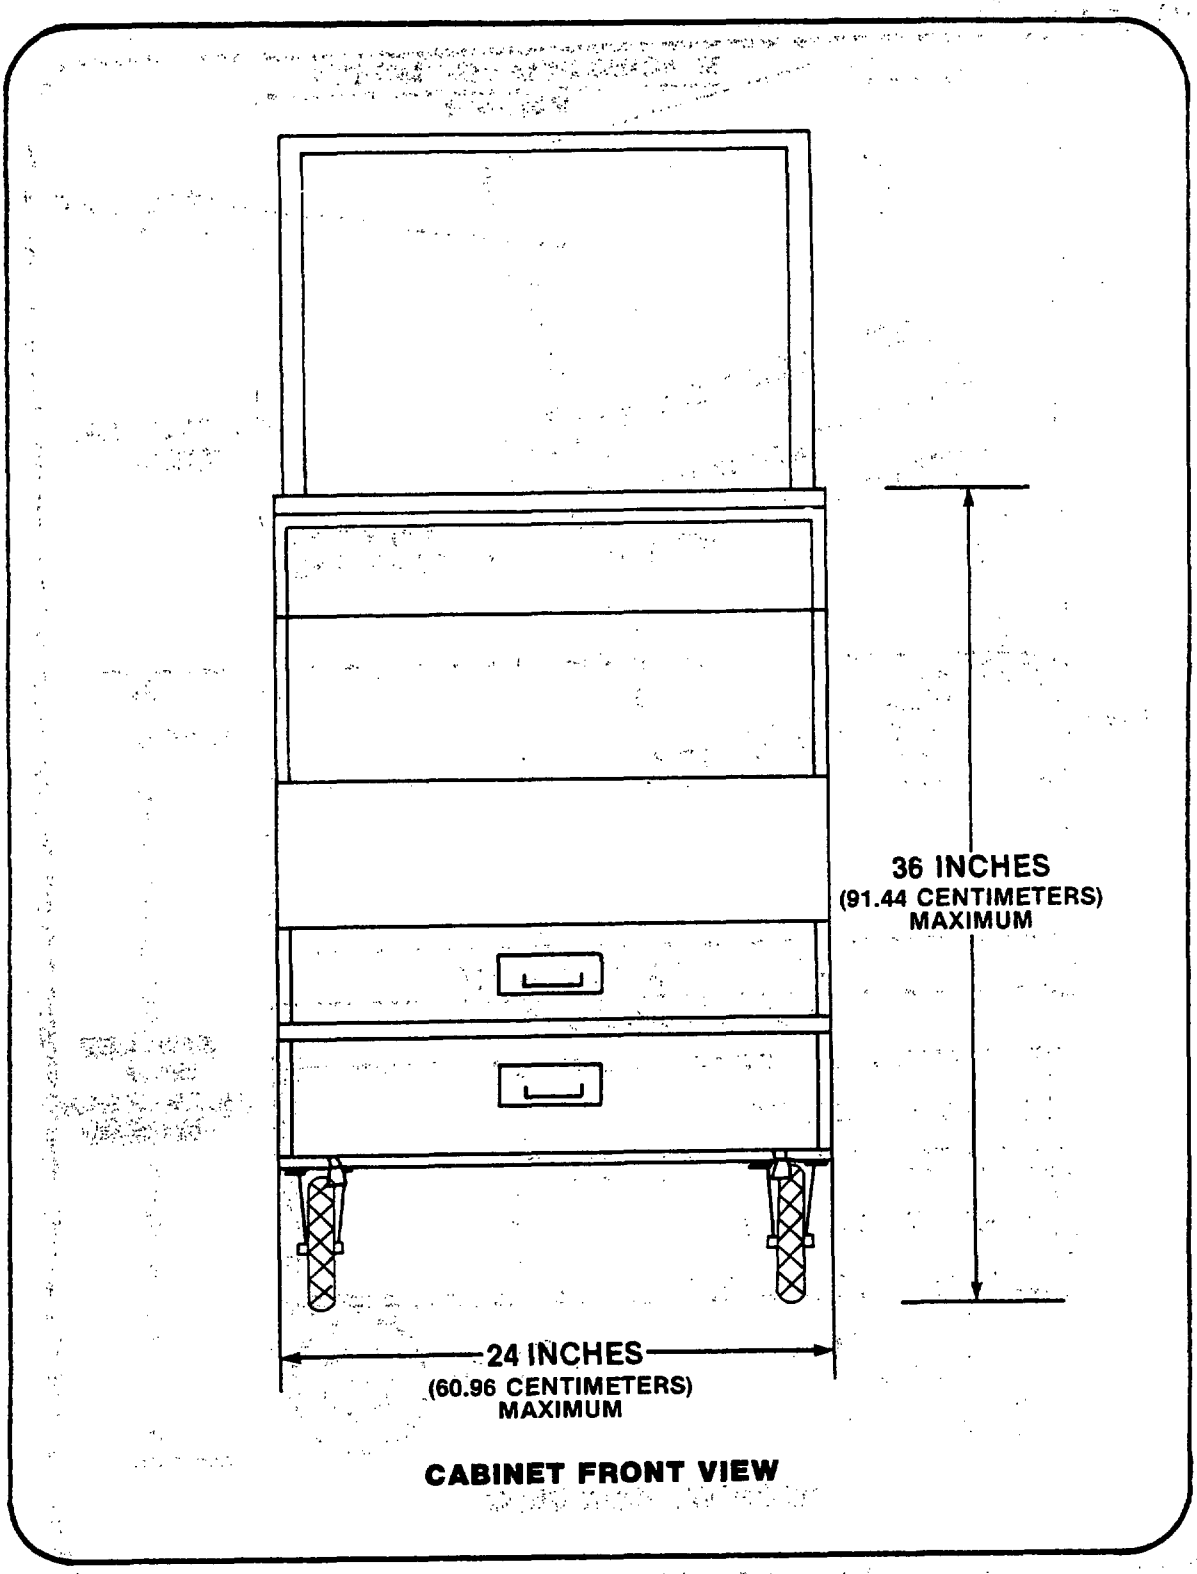


FIGURE 1. Mobile storage cabinet.
(Sheet 1 of 3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.


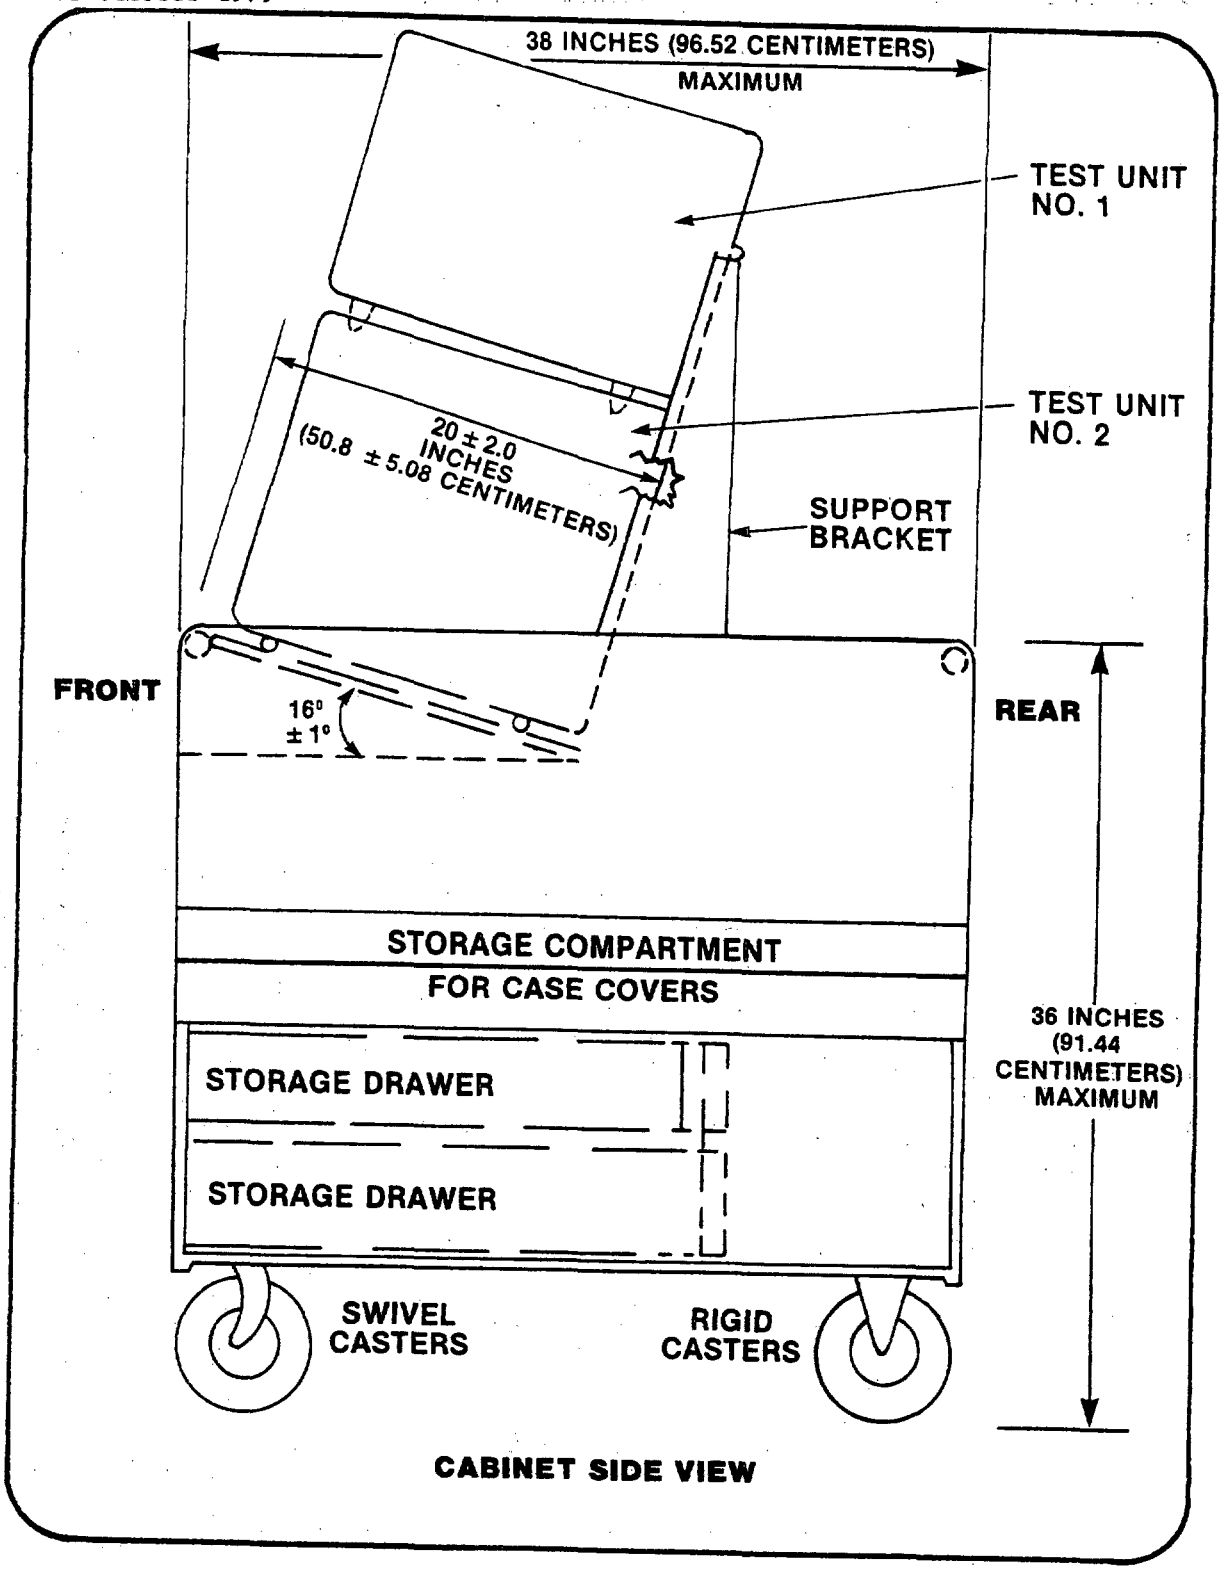


FIGURE 1. Mobile storage cabinet. (continued)
(Sheet 2 of 3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

RIGID CASTERS

REAR

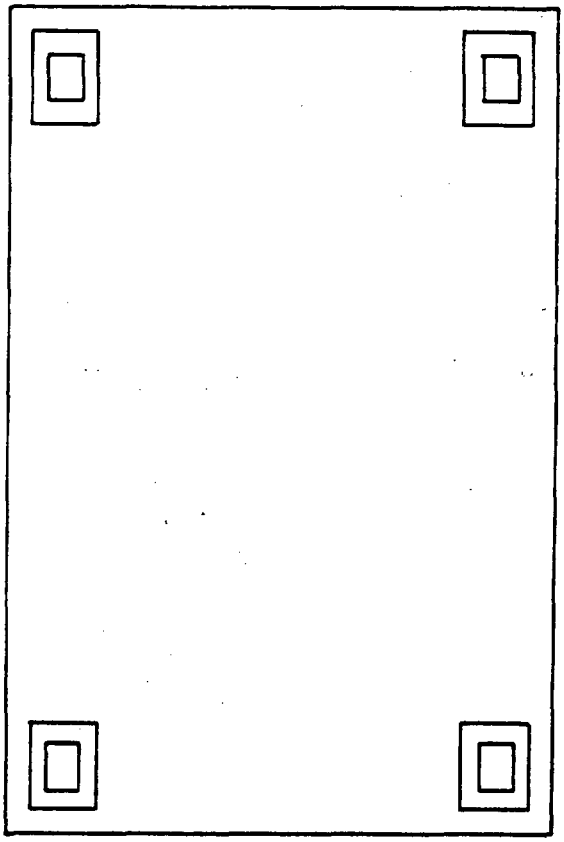

FRONT

SWIVEL CASTERS

CASTER MOUNTING PATTERN

FIGURE 1. Mobile storage cabinet. (continued)
(Sheet 3 of 3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE I. Calibrator set accessories.

NOMENCLATURE		QTY	MANUFACTURER	PART NO.
Cable Assembly	1/	2 ea	ITT Pomona Electronics Corp.	CDB-36RR
Adapter	2/	4 ea		1269
Adapter	2/	4 ea		1296
Cable Assembly	1/	2 ea		BNC-C-18
Cable Assembly	1/	4 ea		BNC-C-24
Cable Assembly	1/	4 ea		BNC-C-48
Cable Assembly	1/	3 ea		BNC-C-60
Adapter	2/	2 ea		3841
Adapter	2/	2 ea		3842
Adapter	2/	2 ea		3288
Adapter	2/	5 ea		3285
Adapter	2/	2 ea		3534
Adapter	2/	2 ea		3535
Adapter	2/	3 ea		3533
Adapter	2/	3 ea		3284
Cable Assembly	1/	2 ea		2484-36 Black
Cable Assembly	1/	2 ea	ITT Pomona Electronics Corp.	2484-36 Red
Adapter	1/	2 ea	Rye Industries	KLPS 30 Red
Adapter	1/	2 ea	Rye Industries	KLPS 30 Black
Manual Coaxial Switch	3/	1 ea	Sage Laboratories Inc.	SAN 2180
10X Attenuator (feedthru)	2/	2 ea	Tektronix	011-0059-02
Extender Cable	1/	1 ea		012-0130-00
Extender, Horizontal Plug-in	3/	1 ea		067-0591-00
Extender, Vertical Plug-in	3/	1 ea		067-0590-00
Calibration Fixture	3/	1 ea	Tektronix	067-0640-00
Adapter	2/	2 ea	General Radio Inc.	0874-9700
Adapter	2/	2 ea		0874-9710
Adapter	2/	2 ea		0874-9800
Adapter	2/	2 ea	General Radio Inc.	0874-9810
1:1 Oscilloscope Probe	1/	2 ea	Hewlett-Packard	10007B
10:1 Oscilloscope Probe	1/	1 ea		10013A
Extender	3/	1 ea		10407B
50 Termination (feedthru)	2/	2 ea		11048C
Pulse Generator	3/	1 ea		1105A
Tunnel Diode	3/	2 ea		1108A
600 Termination (feedthru)	2/	1 ea		11095A
Cable Assembly	1/	1 ea		11500A
Cable Assembly	1/	2 ea		8120-0078
Cable Assembly	1/	2 ea	Hewlett-Packard	8120-1395
Lowpass Filter	3/	1 ea	Philco	184-44 or equiv.
Terminated Thermal Converter	3/	2 ea	Ballantine Laboratories Inc.	1395A-6
Cable Assembly	1/	1 ea	Ballantine Laboratories Inc.	12257A
Harmonic Generator	3/	1 ea	NAVAIREWORKFAC NORIS	150050
Bandpass Filter	3/	1 ea	NAVAIREWORKFAC NORIS	150051
Special Cable	1/	1 ea	NAVAIREWORKFAC NORIS	150057
Cable Assembly	1/	1 ea	Data Instruments Inc.	400396
Cable Assembly	1/	1 ea	Data Instruments Inc.	400397
Extender Kit	3/	1 ea	Data Instruments Inc.	400919

1/ Items that do not require protective foam cutouts in the drawers of the mobile storage unit.
2/ Items to be placed in a corner compartment within the front drawer of the mobile storage unit.
3/ Items that require protective foam cutouts in the drawers of the mobile storage unit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics.

ITEM NO.	NOMENCLATURE	MANUFACTURER		NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
		NAME	PART NO.			
1	Coaxial Ratio Transformer (Test Unit No. 1)	Singer Instrumentation	CRT-3F	150010	Frequency Range	50Hz - 10 kHz
					Terminal Linearity	0.001% of reading
					Output Voltage	350V Maximum
					Maximum Effective Series Output Impedance	Resistance 14Ω Inductance 75 μh
					Input Inductance	Approx. 150 henries
					Dimensions	Diameter: 2.62 inches (6.65 centimeters)
						Length: 6.40 inches (16.26 centimeters)
					Weight	2 pounds (0.91 kilograms)
2	DeKadivider (Test Unit No. 1)	Electro Scientific Industries (ESI)	DP-1311	150011	Terminal Linearity	Initial: ±15 ppm +0.5 Dial Division
						Long Term: ±20 ppm +0.5 Dial Division
					Coefficient of Linearity	Temperature: ±2 ppm/°C
						Power: ± 10 ppm/W

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER		NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
		NAME	PART NO.			
2 (Cont)					Calibration Temperature	23°C
					Input Resistance	10 kΩ
					Maximum Imput Power	5W continuous, 10W intermittent
					Breakdown Voltage	750 V rms to Case
					Resolution	0.0003% of reading
					Dimensions	Diameter: 3.0 inches (7.62 centimeters)
						Length: 8.5 inches (21.59 centimeters)
					Weight	2.1 pounds (0.95 kilograms
3	Quartz Frequency Oscillator (Test Unit No. 1)	Hewlett-Packard (HP)	105B opt 908	150012	Output Frequencies	5 MHz, 1 MHz, 100 kHz sinusiodal; 1 MHz or 100 kHz clockdrive
					Output Voltage	$\geq$1V rms into 50Ω clockdrive $\geq$0.5V rms into 1000Ω
					Aging Rate	$< \left\| 5 \times 10^{-10} \right\|$ per 24 hours

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER NAME	MANUFACTURER PART NO.	NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
3 (Cont)					Stability	As a function of ambient temperature: $<5 \times 10^{-11}$/°C from 0°C to +50°C ($<2.5 \times 10^{-9}$ from 0°C to 50°C). As a function of load: $<+2 \times 10^{-11}$ for any of the following loads; open, short, 50Ω resistive, 50Ω inductive, 50Ω capacitive. As a function of supply voltage: $<+5 \times 10^{-11}$ for 22-30V dc (battery operation, Model 105B) and for 115/230V ±10%.
					rms Deviation of 5 MHz Output (due to noise and frequency fluctuation with crystal filter, 100 Hz wide	Av. Time / Maximum Fractional Frequency Deviation (Δf/f) / Max. rms Phase Deviation (milliradians) 1 ms: 5×10^{-10}; 0.016 10 ms: 1×10^{-10}; 0.031 0.1s: 1×10^{-11}; 0.031 1 s: 1×10^{-11}; 0.31 10 s: 1×10^{-11}; 3.1
					Signal-to-Noise Ratio (5 MHz)	>90 dB below rated output

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER		NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
		NAME	PART NO.			
3 (Cont)					Harmonic Distortion (5 MHz, 1 MHz, 100 kHz)	Down more than 40 dB from rated output
					Non-Harmonic Components (5 MHz, 1 MHz, 100 kHz)	Down more than 80 dB from rated output
					Output Terminals	5 MHz, 1 MHz, 100 kHz front and rear panel BNC connectors, clock drive and electrical frequency control, rear panel BNC connectors
					Frequency Adjustments	Fine adjustments: Front panel control with 5 x 10^{-8} range, with digital dial reading parts in 10^{10}; Coarse adjustments: 1 x 10^{-6} coarse control is screwdriver adjustment at front panel
					Dimensions	Length: 16.75 inches (42.55 centimeters) Width: 11.25 inches (28.58 centimeters) Height: 3.468 inches (8.81 centimeters)
					Weight	24 pounds (10.88 kilograms)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER		NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
		NAME	PART NO.			
4	Phase Shifter (Test Unit No. 1)	Universal Ad-Yu Electronics Inc.	3208	150013	Phase Shift	0-360° (lagging from reference)
					Accuracy	±0.1°
					Resolution	±0.025°
					Repeatability	Better than ±0.05°
					Input Voltage	5 volts rms max at 400 ±0.5 Hz
					Input Impedance	1 megohm, shunted by 25 pf
					Output Voltages	Independently variable, 0 to 100% of input voltage
					Output Impedance	Less than 2.5 ohms
					Dimensions	Length: 8.25 inches (20.96 centimeters)
						Width: 19 inches (48.26 centimeters)
						Height: 3.5 inches (8.89 centimeters)
					Weight	10 pounds (4.54 kilograms)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER		NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
		NAME	PART NO.			
5	Power Meter with rack mount (Test Unit No. 1)	Hewlett-Packard (HP)	436A opt 009 5061-0057	150014	Frequency Range	10 MHz to 18 GHz with 8481A and 8484A sensors
					Power Range	50 dB with 5 full scale ranges of -20, -10, 0, 10, 20 dBm (10 µW to 100 mW) with 8481A sensor
						50 dB with 5 full scale ranges of -60, -50, -40, -30, -20 dBm (1nW to 10 µW) with 8484A sensor
					Accuracy Instrumentation	watt mode: ±0.5% in ranges 1 through 4; ±1.0% in range 5. dBm mode: ±0.02dB ±0.001 dB/°C in range 1 thru 4; ±0.04 dB ±0.001dB/°C in range 5. dB (REL) mode: ± 0.02dB ±0.001dB/°C in ranges 1 thru 4; ±0.04dB ±0.001dB/°C in range 5.
					Zero	Automatic, operated by front panel switch
					Zero Set	±0.5% of full scale on most sensitive range, typical ±1 count on other ranges.

Source: https://asset.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER		NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
		NAME	PART NO.			
5 (Cont)					Zero Carry Over	±0.2% of full scale when zeroed on the most sensitive range
					Noise (typical at constant temperature over any one-minute interval):	With 8484A Sensor: 20 pW peak. With 8481A Sensor: 40 nW peak
					Zero Drift	±2% of full scale on most sensitive range (1 hour, typical at constant temperature)
					Power Reference	Internal 50 MHz oscillator with N female connector on front panel
					Power Output	1.00 mW
						Factory set to ±0.7%, traceable to National Bureau of Standards Accuracy: ±1.2% worst case (±0.9% rms for one year (0°C to 55°C)
					Response Time	(0 to 99% of reading, five time constants)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER NAME	MANUFACTURER PART NO.	NAVAIREWORK FAC- NORIS PART NO.	FUNCTION	CHARACTERISTICS
5 (Cont)						Range 1 (most sensitive) <10 seconds Range 2 <1 second Ranges 3-5 <100 milliseconds (Typical, measured at recorder output)
					Calibration Factor	16-position switch normalizes meter reading to account for calibration factor or effective efficiency. Range 85% to 100% in 1% steps.
					Calibration Adjustment	Front panel adjustment provides capability to adjust gain of meter to match power sensor in use.
					Recorder Output	Porportional to indicated power with 1 volt corresponding to full scale and 0.316 volts to -5 dB; 1 kΩ output impedance, BNC connector.
					RF Blanking Output	Open collector TTL; low corresponds to blanking when auto-zero mode is engaged.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER NAME	MANUFACTURER PART NO.	NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
5 (Cont)					Display	Digital display with four digits, 20% over-range capability on all ranges. Also uncalibrated analog peaking meter to see fast changes.
					Dimensions	Length: 11 inches (27.94 centimeters) Width: 8.375 inches (21.22 centimeters) Height: 5.25 inches (13.33 centimeters)
					Weight	10 pounds (4.54 kilograms)
6	Function Generator with rack mount (Test Unit No. 2)	Exact Electronics Inc.	519 Opt B & G	150020	Waveforms	Sine, Square, Triangle Positive Sine, Positive Pulse, Negative Pulse
					Dynamic Frequency Range	Main generator, 0.1 Hz to 11 MHz (0.01 Hz in search mode) AM-FM generator, 0.01 Hz to 1 MHz

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER		NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
		NAME	PART NO.			
6 (Cont)					Modes of Operation	Run, gate, trigger, pulse, burst, FM, AM, simultaneous AM-FM, ext. carrier
					Synchronous Outputs	Main generator, square wave approximately 4V P-P open circuit. Approximately 100Ω output impedance AM-FM generator, square wave approximately 4V P-P, 100Ω output impedance. Located on rear panel.
					Frequency Accuracy	Main generator, ±2% of frequency range. 1 Hz to 1 MHz. ± (2% of setting plus 2% of frequency range). 1 MHz to 10 MHz. AM-FM generator, 1 Hz to 1 MHz in three calibrated steps. Accurate within ±5%. Uncalibrated continuously variable between steps: variable has 100:1 range down from calibrated step.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER NAME	MANUFACTURER PART NO.	NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
6 (Cont)					Outputs	1. 50Ω output impedance. All waveforms 20V P-P open circuit. 10V P-P into 50Ω with exception of Positive Sine and Positive or Negative Pulses which are 10V peak open circuit, 5V peak into 50Ω. A full 80dB of attenuation is provided in 10 dB steps with 20dB continuously variable (greater than 120 dB utilizing carrier level in AM mode). 2. Separate selected AM-FM output approximately 2V P-P.
					Gate and Trigger Modes	Input: dc coupled, input impedance approximately 1K. Trigger and gate signal requirements, manual or external voltage of approximately 1.2V for turn on. TTL compatible.
					External AM Input	Approximately 10V P-P for 100% modulation at full output. Frequency response, 1 dB down at 1 MHz.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER		NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
		NAME	PART NO.			
6 (Cont)					External FM Input	Approximately 5V P-P for maximum deviation. Slew rate limit approximately 0.1V/μsec.
					External Carrier Input	Approximately 10V P-P for full output.
					Sinewave Distortion	<0.5% 1 Hz to 100 kHz (typically <0.2%). No harmonics. <30dB down 100 kHz to 11 MHz.
					Sine Frequency Response	0.1dB to 100 KHz, 2dB to 10 MHz.
					Square Waveforms	Rise and fall <20 nanoseconds. Overshoot and ringing <5%.
					Triangle Linearity	99% to 100 kHz
					DC Offsets	Variable ±5V into 50Ω, ±10V open circuit. Circuit will automatically limit signal if dc Offset plus signal exceeds maximum voltage input.
					Frequency Stability	0.05% of setting for 10 min. 0.25% of setting 24 hrs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER		NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
		NAME	PART NO.			
6 (Cont)					Amplitude Stability	0.05% of maximum P-P amplitude for 10 min. 0.25% of maximum P-P amplitude for 24 hrs.
					Symmetry (time)	±1% + 10 ns
					Dimensions	Length: 15 inches (38.10 centimeters) Width: 12 inches (30.48 centimeters) Height: 3.54 inches (8.99 centimeters)
					Weight	12 pounds (5.44 kilograms)
7	Portable Calibrator (Test Unit No. 2)	John Fluke	515A	150021	dc Voltage	
					Range:	
					µV	0 to 999 µV continuous (0.2 µV resolution)
					1V	0.0 to 1.0V in 0.1V steps
					10V	0 to 10V in 1V steps

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER NAME	MANUFACTURER PART NO.	NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
7 (Cont)					100V	100V cardinal point
					Accuracy:	(@23°C ±5°C for 1 year, 30-minute warmup)
					µV Range	±2 µV, referred to zero setting
					1V, 10V, and 100V Ranges	± (0.003% of setting or 30 µV, whichever is greater)
					Ripple:	
					µV Range	<10 µV rms
					1V, 10V, and 100V Ranges	<0.01% of range rms
					Load Regulation:	Load R Output Change (% of setting)
					µV, 1V, and 10V Ranges	$>10^8\Omega$ -0.000% (No change)
						10MΩ -0.003%
						1MΩ -0.03%
					100V Range	±5 ppm (0.0 to 0.5 mA)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER		NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
		NAME	PART NO.			
7 (Cont)					Output Current:	Function of source resistance to limits noted. No damage to instrument with short circuit on output.
					Source Resistance	
					µV, 1V, 10V Ranges	300 Ω (up to 10mA load)
					100V Range	<1Ω (up to 0.5mA load)
					Line Regulation	±10% line voltage change
					µV Range	<1 µV
					1V, 10V Ranges	<1 ppm of range
					100V Range	<10 ppm of range
					ac Voltage	
					Voltage Range	1V, 10V, 100V cardinal points
					Output Frequencies:	
					10V	400 Hz, 4 kHz, 50 kHz
					1V, 100V	400 Hz
					Accuracy:	(@23°C ±5°C for 1 year; 30-minute warmup)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator sets major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER NAME	MANUFACTURER PART NO.	NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
7 (Cont)					Voltage	
					1V	±0.05%
					10V	±0.04% - 400 Hz and 4 kHz
						±0.1% - 50 kHz
					100V	±0.06%
					Frequency	±1% except @50 kHz; ± 5%
					Total Harmonic Distortion and Noise:	
					400 Hz and 4 kHz	<0.03%
					50 kHz	<0.05%
					Load Regulation:	
					10V Output (0 to 10 mA)	±0.004% except @50 kHz; ±0.008%
					1V Output (<1Ω Source Z)	-0.005% (20 kΩ); -0.01% (10 kΩ)
					100V Output (<30Ω Source Z)	-0.006% (500 kΩ); -0.015% (200 kΩ)

Source: https://assist.dla.mil Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator sets major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER NAME	MANUFACTURER PART NO.	NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
7 (Cont)					Output Current (For load regulation as stated above:	
					1V, 10V Output	0 to 10 mA rms
					100V Output	0 to 0.5 mA rms
					Resistance	
					Range:	10Ω through 10 MΩ in decade steps plus zero setting
					Accuracy:	(@23°C ±5°C for 1 year; referred to zero ohms setting)
					0Ω	Residual Resistance: <0.15Ω
					10Ω - 100Ω	±0.06%
					1 kΩ - 1 MΩ	±0.015%
					10 MΩ	±0.075%
					Power Rating:	0.2 Watt or 100V (dc or rms) whichever is less
Current limiting protects the 515A output from damage due to short circuit on output						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER		NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
		NAME	PART NO.			
7 (Cont)					Line Regulation	(±10% line voltage change)
					All Voltages at All Frequencies	<±10 ppm
					Temperature Co-efficient	(0°C to 18°C, 28°C to 50°C)
					All Voltages at All Frequencies	±25 ppm/°C
					Dimensions	Length: 16 inches (40.64 centimeters)
						Width: 8.5 inches (21.59 centimeters)
						Height: 3.5 inches (8.89 centimeters)
					Weight	13 pounds (5.90 kilograms
8	Digital True rms Voltmeter with rack mount (Y2014/AB) (Test Unit No. 2)	John Fluke	8920 AG	150022	Functions	ac True rms, ac & dc True rms

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER		NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
		NAME	PART NO.			
8 (Cont)					Displays	Panel-selectable for volts or dB; analog peaking/dipping meter.
					Voltage Ranges	2 mV, 20 mV, 200 mV, 2 V, 20 V, 200V, 700V
					Decibel Ranges	In the autorange mode, the instrument appears as though it has a single range spanning 132dB.
					Decibel Range Reference	dBm Reference: Twelve user-selectable impedances are provided to reference a 0dBm 1mW level (50Ω, 75Ω, 93Ω, 110Ω, 124Ω, 135Ω, 150Ω, 300Ω, 600Ω, 900Ω, 1000Ω, and 1200Ω). Relative dB Reference: A voltage input present when this button is pushed is held as "0dB" reference point for all other voltage changes.
					Ranging	Autoranging with HOLD to defeat autoranging and STEP UP for manual ranging. Ranges up at 2000 digits and ranges down at 180 digits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER		NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
		NAME	PART NO.			
8 (Cont)					Voltage Resolution	0.05% of ranges (3 1/2 digits)
					Decibel Resolution	0.1dB (4 1/2 digits)
					ac Temperature Coefficient: 0°C-18°C, 28°C- 50°C	20 Hz to 1 MHz: 0.07%/°C; 0.006dB/°C; 1 MHz to 20 MHz: 0.1%/°C; 0.01dB/°C
					ac & dc Temperature Coefficient: 0°C-18°C 28°C-50°C	2 mV Range: 10 V/°C 20 mV Range and Above: 0.5%/°C; 0.05dB/°C
					Input Impedance	10 MΩ shunted by <30 pF
					Crest Factor	7 at full scale, increasing down scale by 7 x V range ÷ V input
					Response Time	1.6 seconds typical to rated accuracy within a range, composed of 1 second settling time and 0.6 second maximum digitizing time.
					Maximum Input	700 V rms or 1000 V peak, not to exceed a volt-Hertz product of 1 x 10^8 on any range.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER NAME	MANUFACTURER PART NO.	NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
8 (Cont)						

ac Accuracy: ± % of voltage Reading or ± dB

Input Voltage	Range	10 Hz	20 Hz	50 Hz	200 kHz	1 MHz	2 MHz	10 MHz	20 MHz
180 to 700V 18.0 to 199.9V	700V 200V	5% or 0.5dB	1% or 0.15dB	0.5% or 0.1dB	0.7% or 0.15dB	Not Specified			
1.80 to 19.99V 0.180 to 1.999V 18.0 to 199.9mV	20V 2V 200mV					3% or 0.35dB		5% or 0.5dB	
1.80 to 19.99mV	20mV		2% or 0.25dB	1% or 0.15dB	2% or 0.25dB	4% or 0.4dB			
0.180 to 1.999mV	2mV		3% or 0.35dB	1% or 0.15dB	3% or 0.35dB				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER NAME	MANUFACTURER PART NO.	NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
8 (Cont)					Power Handling Capabilities	1 W average, 100 W peak with maximum pulse width of 10 µsec
					Dimensions	Length: 12.9 inches (32.77 centimeters)
						Width: 8.0 inches (20.32 centimeters)
						Height: 4.3 inches (10.92 centimeters)
					Weight	5.5 pounds (2.49 kilograms)
9	Power Module Main Frame (Test Unit No. 2)	Tektronix (TEK)	TM501	150025	Power Consumption	Approx. 35 W
					Unregulated Supplies	±33.5 Vdc @ 500 mA.
					Temperature Range	0°C to 50°C
					Dimensions	Length: 15.3 inches (38.86 centimeters)
						Width: 3.9 inches (9.91 centimeters)
						Height: 6.0 inches (15.24 centimeters)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER NAME	MANUFACTURER PART NO.	NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
9 (Cont)					Weight	5.4 pounds (2.45 kilograms)
10	Time Mark Generator (used with Item No. 9) (Test Unit No. 2)	Tektronix (TEK)	TG501	150026	Markers	1ns through 5s in a 1-2-5 sequence
					Marker Amplitude	> 1V peak into 50Ω on 5s through 10 ns markers > 750 mV P-P in to 50Ω on 5ns and 2ns markers > 200 mV P-P in 50Ω on 1ns markers
					Trigger Output Signal	Slaved to marker output from 5s through 100 ns. Remains at 100 ns for all tester markers.
					Internal Time Base	
					Crystal Frequency	1 MHz
					Stability (0° to 50°C) after 1/2 hour warm-up	Within 1 part in 10^5
					Long-Term Drift	1 part or less in 10^5 per month

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER		NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
		NAME	PART NO.			
10 (Cont)					Stability	Adjustable to within 1 part in 10^7
11	Power Sensor (Test Unit No. 2)	Hewlett-Packard (HP)	8481A	150027	Frequency Range	10 MHz to 18 GHz
					Power Measurement Range	.3 µW to 100 mW
					Max Permissible RF Power	Average 300 mW Peak 15 W
					Max. Energy/Pulse	30 W/µs
					Max. SWR (Reflection Coefficient)	1.1 (<0.048) 50 MHz to 2 GHz 1.18 (<0.082) 30 to 50 MHz and 2 to 12.4 GHz 1.4 (<0.170) 10 to 30 MHz
					RF Impedance	50Ω nominal
					RF Connector	Type N Male
					Dimensions	Length: 4.125 inches (10.48 centimeters) Width: 1.1875 inches (30.02 centimeters)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER		NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
		NAME	PART NO.			
11 (Cont)						Height: 1.5 inches (3.81 centimeters)
					Weight	1 pound (0.45 kilograms)
12	Power Sensor (Test Unit No. 2)	Hewlett-Packard (HP)	8484A	150028	Frequency Range	10 MHz to 18 GHz
					Power Measurement Range	100 pW to 10 μW
					Maximum Permissible RF Power	Average: 200 mW Peak: 200 mW
					Maximum SWR (Reflection Coefficient)	1.15 (0.070) 30 MHz to 4 GHz. 1.2 (0.091) 4 GHz to 10 GHz. 1.3 (0.13) 10 GHz to 18 GHz. 1.4 (0.17) 10 MHz to 30 MHz.
					RF Impedance	50Ω nominal
					RF Connector	Type N.
					Dimensions	Length: 6.6875 inches (16.99 centimeters)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER NAME	MANUFACTURER PART NO.	NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
12 (Cont)						Width: 1.5625 inches (3.97 centimeters)
						Height: 2.0 inches (5.08 centimeters)
					Weight	1 pound (0.45 kilograms)
12a	Reference Attenuator (supplied with Item No. 12) (Test Unit No. 2)	Hewlett-Packard (HP)	11708A		Maximum SWR (Reflection Coefficient)	1.05 (0.025) at 50 MHz
					RF Impedance	50Ω nominal
					RF Connector	Type N Male
					Calibration	30 ± 0.05dB at 50 MHz and 25°C
					Dimensions	Length: 2.4 inches (6.10 centimeters)
						Diameter: 0.79 inches (2.01 centimeters)
					Weight	3 ounces (85.05 grams)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER		NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
		NAME	PART NO.			
13	Step Attenuator (Test Unit No. 2)	Hewlett-Packard (HP)	8494B Opt 001	150029	Frequency Range	dc to 18 GHz
					Attenuation	0 dB to 11 dB in 1 dB steps
					Attenuation Accuracy	dB Setting — Accuracy 1 — ±0.3 dB 2 — ±0.3 dB 3 — ±0.4 dB 4 — ±0.4 dB 5 — ±0.5 dB 6 — ±0.5 dB 7 — ±0.6 dB 8 — ±0.6 dB 9 — ±0.6 dB 10 — ±0.6 dB 11 — ±0.7 dB Correction charts to 0.1dB at 30 MHz by Type III Navy Calibration Lab.
					Maximum SWR	dc to 8 GHz: 1.5 8 GHz to 12.4 GHz: 1.6 12.4 GHz to 18 GHz: 1.9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER NAME	MANUFACTURER PART NO.	NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
13 (Cont)					Maximum Residual Attentuation	0.6dB ±0.09 dB/GHz
					Power Handling Capability	1 W average, 100 W peak with maximum pulse width of 10μsec.
					Dimensions	Length: 6.25 inches (15.88 centimeters) Width: 2.875 inches (7.30 centimeters) Height: 1.6875 inches (4.29 centimeters)
					Weight	15 ounces (425.24 grams)
14	Step Attenuator (Test Unit No. 2)	Hewlett-Packard (HP)	8495B Opt 001	150030	Frequency Range	dc to 18 GHz
					Attentuation	0 dB to 70 dB in 10 dB steps
					Attentuation Accuracy	dB Setting / Accuracy 10 / ±0.5 dB 20 / ±0.7 dB 30 / ±0.9 dB 40 / ±1.2 dB 50 / ±1.5 dB 60 / ±1.8 dB 70 / ±2.1 dB

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components fuctions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER NAME	MANUFACTURER PART NO.	NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
14 (Cont)						Correction charts to 0.1dB at 30 MHz by Type III Navy Calibration Lab.
					Maximum SWR	dc to 8 GHz: 1.35 8 GHz to 12.4 GHz: 1.5 12.4 GHz to 18 GHz: 1.7
					Maximum Residual Attentuation	0.4dB + 0.07dB/GHz
					Power Handling Capability	1W average, 100 W peak with maximum pulse width of 10µsec.
					Dimensions	Length: 5.1 inches (12.95 centimeters) Width: 2.875 inches (7.30 centimeters) Height: 1.6875 inches (4.29 centimeters)
					Weight	15 ounces (425.24 grams)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER		NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
		NAME	PART NO.			
15	Standard Resistor (Test Unit No. 2)	Electro Scientific Industries (ESI)	SRI (1 kΩ nominal)	150031	Resistance Value	1 kΩ
					Accuracy	Initial: 20 ppm Long Term: 50 ppm Calibration: 10 ppm
					Coefficients	Temp: 5 ppm/°C Power: 0.1 mW/°C
					Maximum Rating	Power: 1000 mW Current: 32 mA
					Calibration Conditions	23°C, low power, four terminal measurement
					Dimensions	Length: 2.4 inches (6.10 centimeters) Width: 3.8 inches (9.65 centimeters) Height: 2.1 inches (5.33 centimeters)
					Weight	8 ounces (226.79 grams)

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER		NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
		NAME	PART NO.			
16	Standard Resistor (Test Unit No. 2)	Electro Scientific Industries (ESI)	SRI (10 kΩ nominal)	150032	Resistance Value	10 kΩ
					Accuracy	Initial: 20 ppm Long Term: 50 ppm Calibration: 10 ppm
					Coefficients	Temperature: 5 ppm/°C Power: 0.1 mW/°C
					Maximum Rating	Power: 1000mW Current: 32 mA
					Calibration Conditions	23°C, low power, four terminal measurement
					Dimensions	Length: 2.4 inches (6.10 centimeters) Width: 3.8 inches (9.65 centimeters) Height: 2.1 inches (5.33 centimeters)
					Weight	8 ounces (226.79 grams)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER		NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
		NAME	PART NO.			
17	Standard Resistor (Test Unit No. 2)	Electro Scientific Industries (ESI)	SRI (100 kΩ nominal)	150023	Resistance Value	100 kΩ
					Accuracy	Initial: 20 ppm Long Term: 50 ppm Calibration: 10 ppm
					Coefficients	Temperature: 5 ppm/°C Power: 0.1 mW/°C
					Maximum Rating	Power: 1000 mW Current: 3.2 mA
					Calibration Condition	23°C, low power, four terminal measurements
					Dimensions	Length: 2.4 inches (6.10 centimeters) Width: 3.8 inches (9.65 centimeters) Height: 2.1 inches (5.33 centimeters)
					Weight	8 ounces (226.79 grams)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER		NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
		NAME	PART NO.			
18	Standard Resistor (Test Unit No. 2)	Electro Scientific Industries (ESI)	SRI (1 MΩ nominal)	155034	Resistance Value	1 MΩ
					Accuracy	Initial: 50 ppm Long Term: 100 ppm Calibration: 20 ppm
					Coefficient	Temperature: 5 ppm/°C Power: 0.1 mW/°C
					Maximum Rating	Power: 100 mW Current: 0.3 mA
					Calibration Condition	23°C, low power, four terminal measurements
					Dimensions	Length: 2.4 inches (6.10 centimeters Width: 3.8 inches (9.65 centimeters) Height: 2.1 inches (5.33 centimeters
					Weight	8 ounces (226.79 grams)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER		NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
		NAME	PART NO.			
19	Standard Resistor (Test Unit No. 2)	Electro Scientific Industries (ESI)	SRI (10 MΩ nominal)	150030	Resistance Value	10 MΩ
					Accuracy	Initial: 50 ppm Long Term: 100 ppm Calibration: 20 ppm
					Coefficients	Temp: 5 ppm/°C Power: 0.1 mW/°C
					Maximum Rating	Power: 10 mW Current: 0.03 mA
					Calibration Conditions	23°C, low power, four terminal measurement
					Dimensions	Length: 2.4 inches (6.10 centimeters) Width: 3.8 inches (9.65 centimeters) Height: 2.1 inches (5.33 centimeters)
					Weight	8 ounces (226.79 grams)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major coponents functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER		NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
		NAME	PART NO.			
20	Termination (Test Unit No. 2)	Weinschel	M1404N	150036	Nominal Impedance	50Ω ± 1Ω at 25°C
					Frequency Range	dc to 18 GHz
					Maximum SWR (for power input not exceeding 10 MW average)	≤1.02 + 0.0045f (GHz)
					Maximum Input	1W average; 1kW peak (5 μsec pulse width)
					Dimensions	Diameter: 0.64 inches (1.63 centimeters)
						Length: 1.56 inches (3.96 centimeters)
					Weight	4 ounces (113.40 grams)
21	Coaxial Attenuator (Test Unit No. 2)	Weinschel	50-18.9	150037	Nominal Impedance	50Ω ± 1Ω
					Frequency Range	dc to 18 GHz
					Nominal Value	18.9 dB ± 0.2 dB

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE II. Calibrator set major components functions and characteristics (Cont'd).

ITEM NO.	NOMENCLATURE	MANUFACTURER		NAVAIREWORK FAC - NORIS PART NO.	FUNCTION	CHARACTERISTICS
		NAME	PART NO.			
21 (Cont)					Maximum SWR	1.20
					Maximum Input Power	1W average; 1kW peak (5 usec pulse width)
					Dimensions	Diameter: 0.84 inches (2.13 centimeters)
						Length: 4.13 inches (10.49 centimeters)
					Weight	5.5 ounces (155.92 grams)

Source: https://assist.dla.mil- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE III. AN/AWM-23 Commercial test equipment.

MANUFACTURER PART NO.	NOMENCLATURE
Dana/5743-A-2181A	Programmable AC/DC Ratiometer Voltmeter
Dana/5743-S-4152C	Programmable AC/DC Ratiometer Voltmeter
E-H Research Labs/574-56	Microwave Swept Oscillator
EMR/1410-05-M25	Frequency Response Analyzer
General Microwave/460B-18	RF Power Meter
General Microwave/551A-45	Noise Figure Meter
Hewlett-Packard (HP)/180A	Oscilloscope
HP/1801A-001	Dual Channel, Vertical Amp
HP/1821A	Time Base, Delay Generator
HP/181C	Oscilloscope
HP/141T	Spectrum Analyzer
HP/8552B	IF Section
HP/8553B	RF Section
HP/8555A	RF Section
HP/8556A	LF Section
HP/3406A-E03	RF Voltmeter
HP/5326B/001/011	Counter/Timer
Instrument Technology/9007-1	Range Simulator
Monsanto/110B-021B	Programmable Counter/Timer
Phoenix-Electronics/PX-30-1	Programmable Pulse Generator
PRD/7808-0362	Signal Generator
Systron-Donner/6038-EE-10A	Counter/Timer
Systron-Donner/6316A-29	Frequency Counter
Systron-Donner/9340-5B Mod 1	Digital Multimeter
Tektronix/R568-206M	Oscilloscope
Tektronix/3S6	Sampling-Unit
Tektronix/3T6	Sampling-Unit
Tektronix/S1	Sampling-Unit
Tektronix/R-230-206M	Digital-Unit
Wavetek/157-S-131A	Programmable Waveform Synthesizer

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE IV. Requirements verification and cross index matrix.

SECTION 3 REQUIREMENTS		SECTION 4 VERIFICATION		
Paragraph Number	Paragraph Identification	Qualification Inspection Paragraph Number	First Article Inspection Paragraph Number	Acceptance Tests Paragraph Number
3.	Requirements	---	---	---
3.1	Item definition	---	---	---
3.1.1	Interface definition	---	---	---
3.1.1.1	Functional interface	4.4.2	4.5.2	4.6.2
3.1.1.2	Physical interface	4.4.2	4.5.2	4.6.2
3.2	Characteristics	---	---	---
3.2.1	Performance	4.4.2	4.5.2	4.6.2
3.2.2	Physical	---	---	---
3.2.2.1	Test unit no. 1	4.4.2	4.5.2	4.6.2
3.2.2.2	Test unit no. 2			4.6.2
3.2.2.3	Mobile storage cabinet			4.6.2
3.2.2.3.1	General			---
3.2.2.3.1.1	Weight			4.6.2
3.2.2.3.2	Strength			---
3.2.2.3.3	Dimensions			4.6.2
3.2.2.3.4	Drawers			
3.2.2.3.4.1	Drawer latches			
3.2.2.3.4.2	Drawer partitions			
3.2.2.3.4.3	Drawer extension			
3.2.2.3.4.4	Drawer locks			
3.2.2.3.4.5	Drawer insert	4.4.2	4.5.2	4.6.2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE IV. Requirements verification and cross index matrix (Cont'd).

SECTION 3 REQUIREMENTS		SECTION 4 VERIFICATION		
Paragraph Number	Paragraph Identification	Qualification Inspection Paragraph Number	First Article Inspection Paragraph Number	Acceptance Tests Paragraph Number
3.2.2.3.4.6	Drawer hardware	4.4.2	4.5.2	4.6.2
3.2.2.3.5	Lid storage	↑	↑	↓
3.2.2.3.6	Test set restraint	↑	↑	↓
3.2.2.3.7	Tiedown provisions	↑	↑	↓
3.2.2.3.8	Fork lift provisions	↑	↑	↓
3.2.2.3.9	Threaded inserts	↑	↑	↓
3.2.2.3.10	External power provisions	↑	↑	↓
3.2.2.3.11	Casters	↑	↑	↓
3.2.2.3.12	Cabinet braking device	↑	↑	↓
3.2.2.3.13	Finish	↑	↑	↓
3.2.2.3.14	Drains	↑	↑	↓
3.2.2.4	Accessories	↑	↑	4.6.2
3.2.3	Reliability	↑	↑	---
3.2.4	Maintainability	↑	↑	---
3.2.4.1	Mean time to repair	↑	↑	---
3.2.5	Environmental conditions	↑	↑	---
3.2.6	Transportability	4.4.2	4.5.2	---
3.3	Design and construction	---	---	---
3.3.1	Materials, parts and processes	---	---	---
3.3.1.1	Selection of materials, parts and processes	---	---	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

TABLE IV. Requirements verification and cross index matrix (Cont'd).

SECTION 3 REQUIREMENTS		SECTION 4 VERIFICATION		
Paragraph Number	Paragraph Identification	Qualification Inspection Paragraph Number	First Article Inspection Paragraph Number	Acceptance Tests Paragraph Number
3.3.1.1.1	Construction	4.4.2	4.5.2	4.6.2
3.3.1.1.2	Metals			4.6.2
3.3.1.1.3	Structural welding			4.6.2
3.3.1.2	Approval for nonstandard materials, parts and processes			---
3.3.2	Electromagnetic interference			4.6.2
3.3.3	Nomenclature and nameplate			
3.3.4	Interchangeability			
3.3.5	Safety			4.6.2
3.3.6	Human engineering			---
3.3.7	Corrosion protection			4.6.2
3.3.8	Decal			
3.3.9	Lift requirements			
3.4	Major component characteristics	4.4.2		4.6.2
3.5	First article	---	4.5.2	---
3.6	Precedence of documents	---	---	---
3.7	Documentation	---	---	---
3.8	Workmanship	4.4.2	4.5.2	4.6.2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE MIL-C- MILITARY SPECIFICATION - CALIBRATOR SET, MISSILE SYSTEM TEST EQUIPMENT - AN/ASM-624

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:50Z
Check the source to verify that this is the current version before use.