MILITARY SPECIFICATION
FOR
TEMPERATURE LIMITER AMPLIFIER(TLA)-TRIM TEST SET
TTK-383/E24M-30
AND
CABLE CASE
CNK-320/E24M-30

This specification is approved for use by Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope - This specification establishes the requirements for the manufacture and acceptance of the Temperature Limiter Amplifier-Trim Test Set TTK-383/E24M-30 and the Cable Case CNK-320/E24M-30.

2. APPLICABLE DOCUMENTS

2.1 Government Documents - The following documents of the issue in effect on the date of invitation for bid or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Military

MIL-Q-9858	- Quality Program Requirements
MIL-E-17555	- Electronic and Electrical Equipment, Accessories, and Repair Parts: Packaging and Packing of
MIL-T-18303	- Test Procedures, Reproduction, Acceptance and Life for Aircraft Electronic Equipment, Format for

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer, Naval Air Engineering Center, Engineering Specifications and Standards Department (ESSD) code 93, Lakehurst, NJ 08733, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

MIL-T-18307	- Nomenclature and Identification for Electronic, Aeronautical, and Aeronautical Support Equipment including Ground Support Equipment
MIL-T-28800	- Test Equipment for use with Electrical and Electronic Equipment, General Specification for

STANDARDS

Military

MIL-STD-108	- Definition of and Basic Requirements for Enclosures for Electric and Electronic Equipment
MIL-STD-109	- Quality Assurance Terms and Definitions
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-454	- Standard General Requirements for Electronic Equipment
MIL-STD-461	- Electromagnetic Interference Characteristics, Requirements for Equipment
MIL-STD-462	- Electromagnetic Interference Characteristics, Measurement of
MIL-STD-781	- Reliability Tests: Exponential Distribution
MIL-STD-810	- Environmental Test Methods

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

HANDBOOKS

(C) MIL-HDBK-235-2	- Electromagnetic (Radiated) Environment Considerations for Design and Procurement of Electrical and Electronics Equipment

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

Handbooks may be obtained from:

Commander
Naval Electronic Systems Command
Standardization Program Branch
Washington, D. C. 20360

DRAWINGS

DL 1083AS100	- Test Set, Temperature Limiter Amplifier - Trim A/E24M-30

Drawings may be obtained from:

Commanding Officer
Naval Avionics Center (Code 915.4)
6000 E. 21st Street
Indianapolis, Indiana 46218

3. REQUIREMENTS

3.1 Item Definition. The TLA-Trim Test Set TTK-383/E24M-30 and the Cable Case CNK-320/E24M-30, is used to trim and troubleshoot the TF41 engine used in the A-7E aircraft. The cables provide the necessary engine interface and the test set provides on four 3 and 1/2 digit, 7 segment incandescent displays the necessary data for adjusting the engine performance. The test set measures high pressure compressor rotor speed (NH) and acceleration or deceleration times; low pressure compressor rotor speed (NL); inlet air temperature (T1); turbine outlet temperature (TOT or T5.1); inlet guide vane (IGV) angle; temperature limiter amplifier output current (mAdc) and voltage (Vdc). The test set can simulate the low pressure compressor tachometer signal (NL SIM) and turbine outlet (T5.1 SIM) or inlet air (T1 SIM) thermocouple signals.

3.1.1 Major Components List. The major components are:

Component	Part Number	Quantity	Manufacturer
TTK-383/E24M-30	1083AS200-1	1	IAW Drawing
CNK-320/E24M-30	1083AS700-1	1	IAW Drawing

3.2 Characteristics.

3.2.1 Test Conditions and Standard Operating Conditions. The General Requirements (Section 3) of MIL-STD-810 apply to the test conditions and standard operating conditions for the TLA-Trim Test Set and Cable Case.

3.2.2 Performance. The performance characteristics for the TLA-Trim Test Set and Cable Case, are described below for the operating temperature range of -40°C to +55°C. The cables must be connected to the test set to obtain the performance characteristics. (Figure 1, TLA-Trim Test Set front panel, locates the controls, switches, digital displays, etc., identified in paragraphs 3.2.2.1 through 3.2.2.14 below).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

3.2.2.1 FUNCTION Display. The FUNCTION Display on the test set shall indicate voltage, current, or inlet guide vane (IGV) angle probe position as selected by the FUNCTION rotary switch.

3.2.2.1.1 VOLTAGE. The FUNCTION display shall indicate within the limits shown below, the positive Direct Current (DC) voltage applied to pin 12 (+) and pin 14 (-) of the W6 cable connector labled Temperature Limiter Amplifier Connector 1 (TLA CONN 1).

Range	0.0 - 50.0 Vdc
Resolution	0.1 Vdc
Accuracy	± 0.5 Vdc
Transient Response time (t) (10% (5V) to 90% (45V) of step input)	1.2 < t < 2.5 Sec.

3.2.2.1.2 CURRENT - The FUNCTION display shall indicate within the limits shown below the positive DC current through a 0.5 ohm, 0.1%, 0.250 watt resistor connected between pin 12 (+) and pin 13 (-) of the W6 cable connector labeled TLA CONN 1.

Range		0-500 milliamperes (mA)
Resolution		1 mA
	Ambient Temperature	
Accuracy	-10°C to 40°C	± 3 mA
	-40°C to -10°C	± 5 mA
	+40°C to +55°C	± 5 mA

3.2.2.1.3 IGV. The FUNCTION display shall indicate within the limits shown below the angle of the Inlet Guide Vane probe lever arm as defined by the removable calibration plate.

Range	-179.9 to +179.9 degree
Resolution	0.1 degree
OFFSET: Increase (INC) Decrease (DEC)	continuously adjustable in 0.1° steps
Offset rate FAST	5 to 7 degrees per second
SLOW	0.2 to 0.4 degrees per second
Accuracy (offset + Angle of IGV probe lever arm)	±0.5 degree

3.2.2.2 Temperature (TEMP) Display. The TEMP display on the test set shall indicate the temperature of Type K (Alumel-Chromel) thermocouples as selected by the SELECT switch.

Source: https://assist.dla.mil -- Downloaded: 20260-26T04:51Z
Check the source to verify that this is the current version before use.

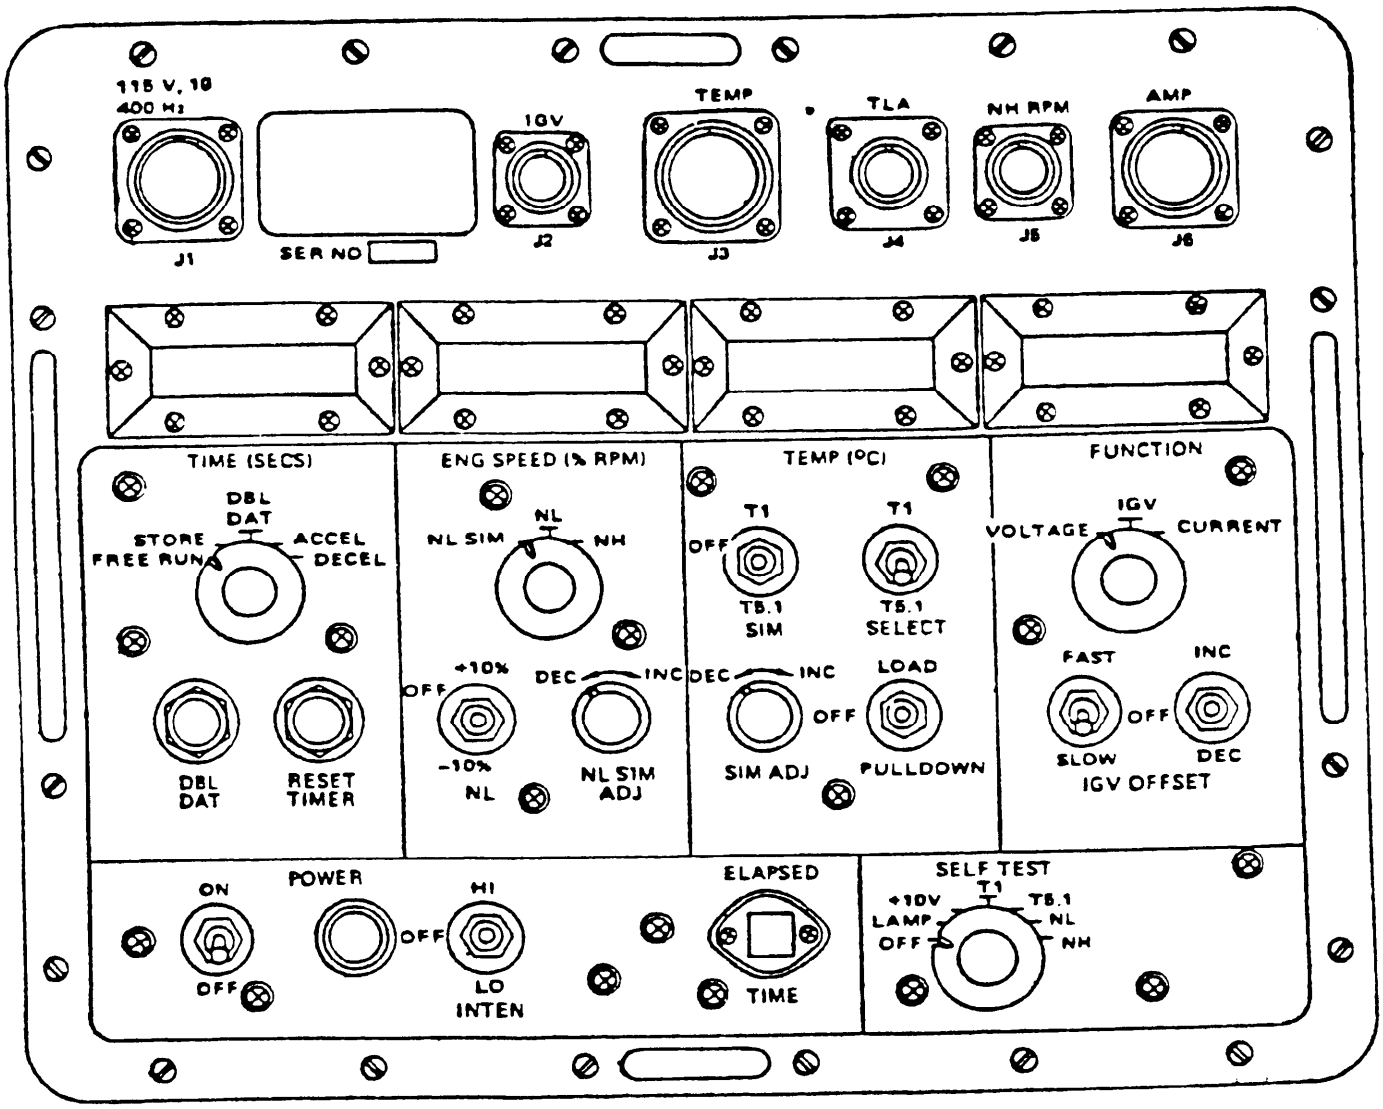


Figure 1, TLA-Trim Test Set Front Panel

Source: https://assist.dla.mil -- Downloaded: 2026Ø-26T04:51Z
Check the source to verify that this is the current version before use.

3.2.2.2.1 SELECT Inlet Air Temperature (T1). The TEMP display shall indicate within the limits shown below the temperature of a Type K thermocouple connected to pin I (Chromel) and pin K (Alumel) of W3 cable connector labled TLA CONN B.

Range		-75 to +900°C
Resolution		1°C
Accuracy	Ambient Temperature -40°C to +15°C +15°C to +25°C +25°C to +55°C	 ± 6°C ± 1°C ± 6°C
Display Update Interval		0.2 to 0.3 Sec.

3.2.2.2.2 SELECT Turbine Outlet Temperature (T5.1). The TEMP display shall indicate within the limits shown below the temperature of a Type K thermocouple connected to pin G (Chromel) and pin M (Alumel) of W3 cable connector labled TLA CONN B.

Range		-75 to 900°C
Resolution		1°C
Accuracy	Ambient Temperature -40°C to +15°C +15°C to +25°C +25°C t +55°C	 ± 6°C ± 1°C ± 6°C
Transient Response time (t) (10% (80°C) to 90% (720°C) of step input)		1.0 to 3.0 Sec.

3.2.2.3 Engine (ENG) SPEED Display. The ENG SPEED Display on the test set shall indicate the Percent Revolutions per Minute (% RPM) as selected by the ENG SPEED rotary switch.

3.2.2.3.1 High Pressure Compressor Rotor Speed (NH). The ENG SPEED display shall indicate within the limits shown below the frequency of sine waves with amplitudes of 1.0 ± 0.1 Volts root mean square (Vrms) and 20.0 ± 0.1 Vrms applied to pin B (signal) and shell (common) of W5 cable connector labeled Tachometer Generator (TACH GEN).

Range (100% RPM = 70 Cycles Per Second (Hz))	3.0 to 120.0% RPM
Resolution	0.1% RPM
Accuracy	± 0.2% RPM
Display Update Interval	0.1 sec for input freq. >50 Hz 1/(5 X input freq.) for input freq. <50Hz

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

3.2.2.3.2 Low Pressure Compressor Rotor Speed (NL), NL Simulation (SIM). The ENG SPEED display shall indicate within the limits shown below the frequency of sine waves with amplitudes of 1.0 ± 0.1 Vrms and 20.0 ± 0.1 Vrms applied to pin A (common) and pin B (signal) of W4 cable connector labeled TLA CONN A.

Range (100% RPM = 420 Hz)	3.0 to 120% RPM
Resolution	0.1% RPM
Accuracy	± 0.2% RPM

3.2.2.4 TIME Display. The TIME display on the test set is an automatic stopwatch when the TIME rotary switch selects Deceleration (DECEL) or Acceleration (ACCEL). The TIME display is a lap or split timer when Double Datum (DBL DAT) or FREE RUN is selected on the TIME rotary switch. The lap or split time is indicated on the TIME display when the TIME rotary switch is in the STORE position.

3.2.2.4.1 DECEL. The TIME display shall indicate the elapsed time when the ENG SPEED display is less than 98.5% of the "Military" (MIL)% RPM and greater than 75.0% RPM. The "MIL"% RPM is defined as the %RPM shown on the ENG SPEED display when the TIME rotary switch is in the DECEL position and the RESET TIMER pushbutton switch is depressed. The limits for the DECEL timer function are listed below.

"MIL"% RPM (Nominally 100.0)	The value shown in ENG SPEED display ± 0.1 when RESET TIMER pushbutton switch is depressed.
Decel Timer Start	(98.5% of "MIL"% RPM) ± 0.2% RPM
Decel Timer Stop	75.0 ± 0.1% RPM
Timer Accuracy	± 0.1 Second
Timer Resolution	0.1 Second
Timer Range	0 - 199.9 Second

3.2.2.4.2 ACCEL. The TIME display shall indicate the elapsed time when the ENG SPEED display is greater than "Idle" + 0.4% RPM and less than 98.5% of the "MIL" % RPM. "Idle" % RPM is defined as the % RPM shown on the ENG SPEED display when the TIME rotary switch is in the ACCEL position and the RESET TIMER pushbutton switch is depressed. The limits for the ACCEL timer function are listed below.

"Idle" % RPM (Nominally 55.0, "Idle" must be > 50.0)	The value shown in the ENG SPEED display ± 0.1 when the RESET TIMER pushbutton switch is depressed.
Accel Timer Start	("Idle" + 0.4% RPM) ± 0.2% RPM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

Accel Timer Stop	(98.5% of "MIL"% RPM) ± 0.2% RPM
Timer Accuracy	± 0.1 Second
Timer Resolution	0.1 Second
Timer Range	0-199.9 Second

3.2.2.4.3 DBL DAT. The DBL DAT timer mode is selected when the TIME rotary switch is in the DBL DAT position and the RESET TIMER pushbutton switch is depressed. The timer starts when the DBL DAT pushbutton switch is depressed. The TIME display shall indicate the elapsed time since depressing the DBL DAT pushbutton switch when the TIME rotary switch is in DBL DAT. When the TIME rotary switch is set to STORE, the time display shall indicate the elapsed time to that point but the timer will continue to run. The limits for the DBL DAT timer function are listed below.

Range	0-199.9 Second
Accuracy	± 0.1 Second
Resolution	0.1 Second

3.2.2.4.4 STORE. The STORE timer mode is selected when the need to record a time arises. The STORE position of the TIME rotary switch stops the TIME display from incrementing while the timer runs.

3.2.2.4.5 FREE RUN. The FREE RUN timer mode is selected when the TIME rotary switch is set to FREE RUN and the RESET TIMER pushbutton switch is depressed. The timer starts when the RESET TIMER pushbutton switch is released. The FREE RUN timer will not stop. The limits for the FREE RUN timer mode are the same as those for 3.2.2.4.3.

3.2.2.4.2.6 RESET TIMER. The RESET TIMER pushbutton switch, when depressed, sets the timer to zero, saves the ENG SPEED value if DECEL or ACCEL is selected on the TIME rotary switch and initializes the timer mode selected by the TIME rotary switch.

3.2.2.5 DBL DAT Output. When the DBL DAT pushbutton switch is depressed, the resistance from pin 3 of the W4 cable connector labeled To Amplifier (AMP) No. 3 CONN to pin 3 of the W4 cable connector labeled To AMP No. 3 CABLE shall measure less than 1 ohm.

3.2.2.6 NL Minus(-) 10% Output. When the NL switch is set to - 10%, the resistance from pin 4 to pin 5 of the W6 cable connector labeled To TLA CONN 1 measures less than 1 ohm.

3.2.2.7 NL Plus(+) 10% Output. When the NL switch is set to +10% and the LOAD/OFF/PULLDOWN switch is set to PULLDOWN the resistance from pin 5 to pin 6 of the W6 cable connector labeled To TLA CONN 1 measures less than 1 ohm.

3.2.2.8 NL OFF. When the NL switch is set to OFF, the resistance between the pins in 3.2.2.6 and 3.2.2.7 shall measure greater than 1 megohm.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

3.2.2.9 NL SIM Adjust(ADJ). When the ENG SPEED rotary switch is set to NL SIM, the NL SIM ADJ shall vary the frequency of the waveform at pin 5 (signal) and pin 4 (common) of W6 cable connector labeled To TLA CONN 4. The limits of the NL SIM waveform are listed below.

Frequency Range	Less than 252 Hz to 462 Hz
Frequency Range Adjustment	± 20 Hz min. using R6 on Printed Circuit Board Assembly Reference Designator 1A1A2A9.
Amplitude (LOAD = 1,000 ohm)	Greater than 20 Volts peak to peak (Vp-p)
Waveform	Sine wave
Distortion	Less than 10%

3.2.2.10 Temperature Simulation. The test set provides an adjustable millivolt source for simulating thermocouple outputs from -75°C to 900°C. The output is selected by the SIM switch and adjusted by the SIM ADJ potentiometer.

3.2.2.10.1 SIM Inlet Air Temperature (T1). When the SIM switch is set to T1, the millivolt source is connected to pin A (+) and pin J (-) of W3 cable connector labeled To TLA CONN B.

3.2.2.10.2 SIM Turbine Outlet Temperature (T5.1). When the SIM switch is set to T5.1, the millivolt source is connected to pin E (+) and pin F (-) of W3 cable connector labeled To TLA CONN B.

3.2.2.10.3 Temperature Simulation Limits. The limits of the millivolt source are listed below.

Range (min.)	-3.0 mV to +38.0 mV
Adjustment	Continuous (10 turn potentiometer)
Source Impedence (max.)	6 ohm

3.2.2.11 LOAD-OFF-PULLDOWN Switch. In the LOAD position, this switch connects simulated thermocouple loads across the temperature simulation outputs. A 2.8 ± 0.3 ohm load and a 1.3 ± 0.3 ohm load are connected across pins E and F and pins A and J, respectively, of the W3 cable connector labeled To TLA CONN B. In the PULLDOWN position, the resistance between pin 2 and pin 10 of the W6 cable connector labeled To TLA CONN 1 is less than 1 ohm and the +10% NL switch function is enabled.

3.2.2.12 SELF-TEST Rotary Switch. The SELF TEST rotary switch provides a means of checking the circuitry within the test set. The limits of the SELF TEST function are listed below.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

SELF TEST Position	Indicator	Indication
LAMP	TIME Display	-188.8
	ENG SPEED Display	-188.8
	TEMP Display	-1888
	FUNCTION Display	-188.8
+10V	FUNCTION Display	10.0 ± 0.2
T1	TEMP Display	-0 ± 2
T5.1	TEMP Display	733 ± 2
NL	ENG SPEED Display	100.0 ± 0.1
NH	ENG SPEED Display	100.0 ± 0.1

3.2.2.13 Intensity (INTEN) Switch. The INTEN switch controls the brightness of the illuminated front panel and the displays. In the OFF position, the front panel is not illuminated and the displays are dim. In the Low (LO) position, the front panel is dimly illuminated and the displays are bright. In the High (HI) position, the front panel is brightly illuminated and the displays are dim.

3.2.2.14 POWER Switch and Indicator. When 400 Hz 115 Volts alternating current (Vac) power is connected to the test set, the POWER switch shall turn the test set ON and OFF and the indicator shall glow green in the ON position. When 60 Hz 115 Vac power is connected to the test set, the POWER switch shall not energize the test set but the indicator lamp shall glow green when the POWER switch is ON.

3.2.3 Environmental. The TLA-Trim Test Set and Cable Case shall meet the performance requirements of 3.2.2 when exposed to the following environmental conditions.

3.2.3.1 Temperature and Altitude.

a. Operating temperature range shall be -40°C to + 55°C.

b. Operating Altitude shall be 10,000 feet maximum.

c. Non-operating temperature range shall be -55°C to +70°C.

d. Non-operating altitude shall be 50,000 feet maximum.

3.2.3.2 Vibration. Requirements of MIL-T-28800 for Class 6 equipment apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

3.2.3.3 Shock, Mechanical Pulse. Requirements of MIL-T-28800 apply.

3.2.3.4 Splashproof. Requirements of MIL-T-28800 for Style A apply.

3.2.3.5 Humidity. As required by the test procedure of 4.2.7.

3.2.3.6 Salt Atmosphere. Requirements of MIL-T-28800 for Style A, exposure, enclosure apply.

3.2.3.7 Explosive Atmosphere. Requirements of MIL-T-28800 apply.

3.2.3.8 Sand and Dust. Requirements of MIL-T-28800 apply.

3.2.3.9 Fungus. The TLA-Trim Test Set shall be inherently fungus-inert. A certification of non-nutrient fungus-inert materials duly witnessed and certified shall be submitted to the procuring activity for approval.

3.2.3.10 Electromagnetic Interference (Contractor). Requirements of MIL-T-28800 for Class 2 equipment applies, with the additional requirements of Conducted Emissions CE01, CE02, CE04, and Radiated Susceptiblity RS01, RS02.

3.2.3.11 Electromagnetic Vulnerability (Government). The TLA-Trim Test Set shall not be vulnerable to the electromagnetic environment of an aircraft carrier flight deck when tested in accordance with 4.2.1.12.

3.2.4 Reliability. The TLA-Trim Test Set shall have a Mean-Time-Between Failure (MTBF) of 250 hours demonstrated at the 98% Reliability Level when tested in accordance with 4.2.1.13.

3.3 Design and Construction.

3.3.1 Workmanship. Requirements of MIL-T-28800 apply.

3.3.2 Production Drawings. The TLA-Trim Test Set and Cable Case shall be fabricated in accordance with the drawings listed in DL1083AS100 and subsidiary specifications listed in the data list defined by this specification, except insofar as errors on the drawings may be incompatible with the requirements of this specification and related specifications. In any case, it is a condition of final acceptance that the units manufactured meet all the applicable requirements of this specification and such acceptance test documents as may be applicable.

3.3.3 Interchangeability. The requirements of MIL-T-28800 apply.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for Inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements specified herein. Except as otherwise specified in the contract or purchase order, the supplier may use his own or any other facilities suitable for the inspections required herein. The procurring activity reserves the right to perform any of the inspections specified herein

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

where such inspections are deemed necessary to assure that the product conforms to the specified requirements.

4.1.1 Quality Assurance Terms and Definitions. The quality assurance terms used herein are defined in MIL-STD-109.

4.1.2 Quality Assurance Program. The requirements of MIL-Q-9858 apply as specified in the contract.

4.2 Classification of Inspections. The inspection requirements are classified as (a) Qualification or First Article and (b) Quality Conformance.

4.2.1 Qualification or First Article Inspection. Tests and examinations for Qualification or First Article Inspection are listed below:

a. Preoperational Inspection

b. Temperature and Altitude

c. Vibration

d. Shock, Mechanical Pulse

e. Splashproof

f. Humidity

g. Salt Atmosphere

h. Explosive Atmosphere

i. Sand and Dust

j. Electromagnetic Interference

k. Electromagnetic Vulnerability

l. Reliability

4.2.1.1 Test Plans and Test Reports. Unless otherwise specified in the contract or purchase order, test plans and test reports shall be submitted to the procuring activity for approval.

4.2.1.1.1. Test Plans. Test plans shall detail the test procedures and reference the test method to the requirements specified herein. The test plans shall provide for the recording of actual readings rather than check marks to indicate conformance to the requirements. Limits for acceptance shall be included.

4.2.1.1.2 Test Reports. Test reports shall detail the execution of the test plans and present the required data with the limits for acceptance. Details of corrective action required to meet the limits for acceptance shall be included where the recorded data does not meet the limits for acceptance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

4.2.1.1.3 Commencement of Testing. The procuring activity shall be notified, at least three weeks in advance, of the scheduled date for the start of Qualification or First Article inspection to permit timely witnessing of the inspection by technical personnel from the procuring activity.

4.2.1.1.4 Failure Criteria. Failure to meet the requirements of any tests or examinations of 4.2.1 shall constitute failure of the Qualification or First Article inspection unless the procurring activity upon review of the test plans and reports provides the supplier relief, in writing, for the discrepancies.

4.2.1.1.5 Test Sequence. The tests and examinations listed in 4.2.1 shall be performed in any sequence desired by the supplier.

4.2.1.1.6 Sample Size. The contract or purchase order shall define the sample size. The samples shall be manufactured using production methods that will be employed for the balance of the contract.

4.2.1.2 Preoperational Inspection. The preoperational inspection of MIL-T-28800 shall be performed.

4.2.1.3 Temperature and Altitude. The environmental test method of MIL-STD-810, Method 504.1, Equipment Category 2 applies.

4.2.1.4 Vibration. The vibration test of MIL-T-28800 applies.

4.2.1.5 Shock, Mechanical Pulse. The shock, pulse, test of MIL-T-28800 applies.

4.2.1.6 Splashproof. The Splashproof, Style A, test of MIL-T-28800 applies.

4.2.1.7 Humidity. The environmental test method of MIL-STD-810, Method 507.1, Procedure I applies.

4.2.1.8 Salt Atmosphere. The Salt Atmosphere, exposure, enclosure, test of MIL-T-28800 applies.

4.2.1.9 Explosive Atmosphere. The explosive atmosphere test of MIL-T-28800 applies.

4.2.1.10 Sand and Dust. The Sand and Dust, Class 1 and 2, Style A and T test of MIL-T-28800 applies.

4.2.1.11 Electromagnetic Interference. The Electromagnetic interference test of MIL-T-28800 applies.

4.2.1.12 Electromagnetic Vulnerability. The TLA-Trim Test Set shall be interfaced to an A-7E aircraft via its cables and shall perform within the limits specified in 3.2.2 when subjected to the electromagnetic environments of MIL-HDBK-235-2 (Navy), Table Va. Static (engine not operating) and dynamic

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

(engine operating) tests shall be performed by personnel from the Naval Surface Weapons Center, Dahlgren, VA, at the Naval Air Test Center, Patuxent River, MD.

4.2.1.13 Reliability. The Reliability test of MIL-STD-781, Test Plan XXIV, Test Level A-1 applies.

4.2.2 Quality Conformance Inspection. Tests and examinations for Quality conformance inspection are listed below:

a. Preoperational Inspection

b. Performance Inspection

4.2.2.1 Test Plans and Test Reports. Unless otherwise specified in the contract or purchase order, test plans and test reports shall be submitted to the procuring activity for approval.

4.2.2.1.1 Test Plans. Test plans shall detail the test procedures, define the required test equipment, document programs for automatic test equipment, and define the criteria for acceptance. Test procedures for maintenance (troubleshooting) may be included.

4.2.2.1.2 Test Reports. Test reports shall summarize the results of the preoperational and performance inspections including the corrective actions required to obtain the acceptance criteria. When corrective action to obtain the acceptance criteria results in a waiver of the acceptance criteria, the justification for the waiver must be included in the test report.

4.2.2.2 Preoperational Inspection. The preoperation inspection of MIL-T-28800 shall be performed.

4.2.2.3 Performance Inspection. The requirements of secion 3.2 shall be demonstrated utilizing the test plans of 4.2.2.1.1.

4.2.2.4 Test Conditions. The test conditions of the General Requirements (Section 3) of MIL-STD-810 apply.

5. PREPARATION FOR DELIVERY

5.1 Preservation, Packaging, Packing, and Marking. Preparation for delivery shall be in accordance with levels of MIL-E-17555 specified by the contract or purchase order.

5.2 Delivery of Test Samples. The disposition of test samples shall be specified in the contract or purchase order.

6. NOTES

6.1 Intended Use. The TLA-Trim Test Set, TTK-383/E24M-30 and Cable Case, CNK-320/E24M-30 is used by organizational (flight line) and intermediate (test cell) maintenance personnel to trim the Temperature Limiter Amplifier (a

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

component) of the TF41 engine used in the A-7E aircraft. The equipment will be used ashore and afloat, day and night, fair weather or foul.

6.2 Ordering Data. Procurement documents shall specify the following:

a. Title, number, and date of this specification.

b. The levels of preservation, packaging, packing and marking per MIL-E-17555.

c. The responsibility for the performance of inspections not to be performed by the supplier.

d. The quantity of samples for Qualification or First Article inspection and the disposition of the samples.

e. The contractor's test facilities shall be available to the Government inspector(s) at all times during all testing required by this specification.

f. Quality Assuance Program requirement in accordance with MIL-Q-9858 (tailored).

6.3 Precedence of Documents. When the requirements of the contract, this specification or applicable subsidiary specifications are in conflict, the contract shall take precedence over any specification and this specification shall precede any subsidiary specification.

Preparing Acitivity:
Navy (AS)

(Project No. 6685-N718)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

INDEX

TITLE	PARAGRAPH
A	
Acceleration	3.2.2.4.2
Applicable Documents	2
B	
C	
Characteristics	3.2
Classification of Inspections	4.2
Commencement of Testing	4.2.1.1.3 3.2.2.1.2
Current	
D	
Deceleration	3.2.2.4.1
Delivery of Test Samples	5.2
Design and Construction	3.3
Double Datum	3.2.2.4.3
Double Datum Output	3.2.2.5
E	
Electromagnetic Interference (Contractor)	3.2.3.10 4.2.1.11
Electromagnetic Vulnerability (Government)	3.2.3.11 4.2.1.12
Engine Speed Display	3.2.2.3
Environmental	3.2.3
Explosive Atmosphere	3.2.3.7 4.2.1.9
F	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

Failure Criteria	4.2.1.1.4
Free Run	4.2.2.4.5
Function Display	3.2.2.1
Fungus	3.2.3.9
G	
Government Documents	2.1
H	
High Pressure Compressor Rotor Speed	3.2.2.3.1
Humidity	3.2.3.5 4.2.1.7
I	
Inlet Guide Vane	3.2.2.1.3
Intended Use	6.1
Intensity Switch	3.2.2.13
Interchangeability	3.3.3
Item Definition	3.1
J	
K	
L	
Load-Off-Pulldown Switch	3.2.2.11
Low Pressure Compressor Rotor Speed, Low Pressure Compessor Rotor Speed Simulation	3.2.2.3.2
Low Pressure Compressor Rotor Speed Minus 10% Output	3.2.2.6
Low Pressure Compressor Rotor Speed Off	3.2.2.8
Low Pressure Compressor Rotor Speed Plus 10% Output	3.2.2.7
Low Pressure Compressor Rotor Speed Simulation Adjust	3.2.2.9
M	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

Major Components List	3.1.1
N	
NOTES	6.
O	
Ordering Data	6.2
P	
Performance	3.2.2
Performance Inspection	4.2.2.3
Power Switch and Indicator	3.2.2.14
Precedence of Documents	6.3
Preoperational Inspection	4.2.1.2 4.2.2.2
PREPARATION FOR DELIVERY	5.
Preservation, Packaging, Packing and Marking	5.1
Production Drawings	3.3.2
Q	
Qualification or First Article Inspection	4.2.1
Quality Assurance Program	4.1.2
Quality Assurance Provisions	4.
Quality Assurance Terms and Definitions	4.1.1
Quality Conformance Inspection	4.2.2
R	
Reliability	3.2.4 4.2.1.13
REQUIREMENTS	3.
Reset Timer	3.2.2.4.6
Responsibility for Inspections	4.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

S

Salt Atmosphere 3.2.3.6, 4.2.1.8

Sand and Dust 3.2.3.8, 4.2.1.10

SCOPE 1.

Scope 1.1

Select Inlet Air Temperature 3.2.2.2.1

Select Turbine Outlet Temperature 3.2.2.2.2

Self Test Rotary Switch 3.2.2.12

Shock, Mehanical Pulse 3.2.3.3, 4.2.1.5

Simulate Inlet Air Temperature 3.2.2.10.1

Simulate Turbine Outlet Temperature 3.2.2.10.2

Splashproof 3.2.3.4, 4.2.1.6

Store 3.2.2.4.4

T

Temperature Display 3.2.2.2

Temperature and Altitude 3.2.3.1, 4.2.1.3

Temperature Simulation 3.2.2.10

Temperature Simulation Limits 3.2.2.10.3

Test Conditions 4.2.2.4

Test Conditions and Standard Operating Conditions 3.2.1

Test Plans 4.2.1.1.1, 4.2.2.1.1

Test Plans and Test Reports 4.2.1.1, 4.2.2.1

Test Reports 4.2.1.1.2, 4.2.2.1.2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

Test Sequence	4.2.1.1.5
Time Display	3.2.2.4
U	
V	
Vibration	3.2.3.2 4.2.1.4
Voltage	3.2.2.1.1
W	
Workmanship	3.3.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-T-85563(AS) TEMPERATURE LIMITER AMPLIFIER(TLA)-TRIM TEST SET

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE AIR FORCE

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

Commanding Officer
Naval Air Engineering Center
Engineering Specifications and
Standards Department (ESSD) Code 93
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:51Z
Check the source to verify that this is the current version before use.