RR-S-1989
May 4, 1976

FEDERAL SPECIFICATION

SHERBET CUP, STAINLESS STEEL

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE

1.1 This specification covers one type of cup-shaped dish with a goblet-type base.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specification:

PPP-B-636 - Boxes, Shipping, Fiberboard.

Federal Standard:

Fed. Std. No. 123 - Marking for Shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standard:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

American Society for Testing and Materials (ASTM) Standard:

A 167 - Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

National Motor Freight Traffic Association, Inc., Agent:

National Motor Freight Classification

(Application for copies shall be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:12Z
Check the source to verify that this is the current version before use.

Uniform Classification Committee, Agent:

Uniform Freight Classification

(Application for copies shall be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Preproduction sample. When specified (see 6.2), before production is commenced, a sample sherbet cup shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Material. The metal used in the fabrication of the sherbet cup shall conform to class 302 or 304 of ASTM A 167.

3.3 Design. The sherbet cup shall conform to figure 1.

3.4 Construction. The bowl and the base of the sherbet cup shall be fabricated from not less than 20-gage (0.0375 inch) stainless steel. The bowl and the base shall be formed from single sheets of stainless steel and shall be seamless. The bottom of the bowl shall be joined to the base by welding.

3.5 Dimensions. The cup shall meet the dimensional requirements of figure 1 (see 4.4.2).

3.6 Capacity. The capacity of the sherbet cup shall be 6 ounces plus or minus 5 percent when measured in accordance with 4.6.

3.7 Finish. The cup shall have commercial general purpose or high luster polished surfaces. Cups furnished on any one contract shall have an identical finish.

3.8 Workmanship. Cup shall be clean, free from stains, burrs, sharp projections, gouges, and defects affecting appearance and serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Preproduction sample. Inspection and testing of the preproduction sample shall be made on a completely fabricated item for all applicable provisions of this specification.

4.3 Sampling. Sampling for inspection and acceptance shall be made in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Lot. Unless otherwise specified (see 6.2), a lot shall consist of all cups offered for acceptance at the same time.

4.4 End item inspection.

4.4.1 Visual examination. Examination of the end item shall be in accordance with the classification of defects in table I. the inspection level shall be II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:12Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects, end item

Examine	Defect	Classification Major	Classification Minor
Finish	Not as specified	X	
	Not uniformly applied		X
Construction and Workmanship	Not seamless	X	
	Trimming or die marks		X
	Dent, crack, hole, puncture, or fracture in metal	X	
	Base not stable; does not rest evenly on flat surface		X
	Visibly out of shape	X	
	Sharp or burred edges or projections	X	
	Wrinkles or waves in metal forming	X	
	Scale or lamination in metal	X	
	Deep scratch or gouge	X	
	Light scratch, mar or gouge		X

4.4.2 Dimensional examination. Measurement of the end item shall be made to determine compliance with the dimensional requirements in figure I. Any noncompliance shall be classified a defect. The inspection level shall be S-3 with an AQL of 4.0 expressed in terms of defects per hundred units.

4.5 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing, and marking as required by section 5 are complied with. Defects shall be as indicated in table II. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The inspection level shall be S-2 with an AQL of 2.5 defects, expressed in terms of defects per hundred units.

TABLE II. Classification of preparation for delivery defects

Examine	Defects
Packaging	Not in accordance with specification requirements.
Packing	Not level specified, not in accordance with specification requirements. Number of packages not as specified. Container not as specified, closure not as specified.
Markings	Illegible, incorrect, incomplete, omitted, not in accordance with specification requirements.

4.6 Test.

4.6.1 Capacity. Using standard laboratory volumetric measures, a sample cup randomly selected from each lot shall be filled with water to the minimum capacity allowed in 3.6. Any overflow shall constitute failure of the test and shall be cause for rejection of the lot.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B, or C, as specified (see 6.2).

5.1.1 Level A and B. Each cup shall be wrapped in a non-abrasive paper and packaged in a polyethylene bag.

5.1.2 Level C. The cups shall be packaged to afford adequate protection against damage during shipment and storage from the supply source to the receiving activity. The supplier may use his standard practice when it meets this requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:12Z
Check the source to verify that this is the current version before use.

5.2 Packing. Packing shall be level A, B or C, as specified (see 6.2).

5.2.1 Level A. The cups shall be packed in a close-fitting box conforming to PPP-B-636, class weather resistant. The box shall be waterproof sealed with tape in accordance with the appendix to the box specification.

5.2.2 Level B. Seventy-two (72) cups shall be packed in a close-fitting box conforming to PPP-B-636, class domestic. The box shall be closed in accordance with the appendix to the box specification.

5.2.3 Level C. Cups shall be packed to afford adequate protection against physical and environmental damage during shipment, handling and limited storage. Containers shall comply with Uniform Freight Classification rules or National Motor Freight Classification rules, as applicable.

5.3 Marking. Shipping containers shall be marked in accordance with Fed. Std. No. 123.

6. NOTES

6.1 Intended use. Sherbet cups are intended to be used for individual servings of desserts, such as ice cream, puddings, and the like.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents.

(a) Title, number, and date of this specification.
(b) When a preproduction sample is required (see 3.1).
(c) Size of lot, if different from 4.3.1.
(d) Levels of packaging and packing required (see 5.1 and 5.2).
(e) Quantities of unit packages in shipping container (see 5.2.1).

6.3 Inclusion. The requirements of Veterans Administration Specification 63-S-490B dated August 22, 1960, are stated in this document.

Preparing activity:

GSA-FSS

Civil Agency Coordinating Activities:

GSA-FSS
VA-DMS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:12Z
Check the source to verify that this is the current version before use.

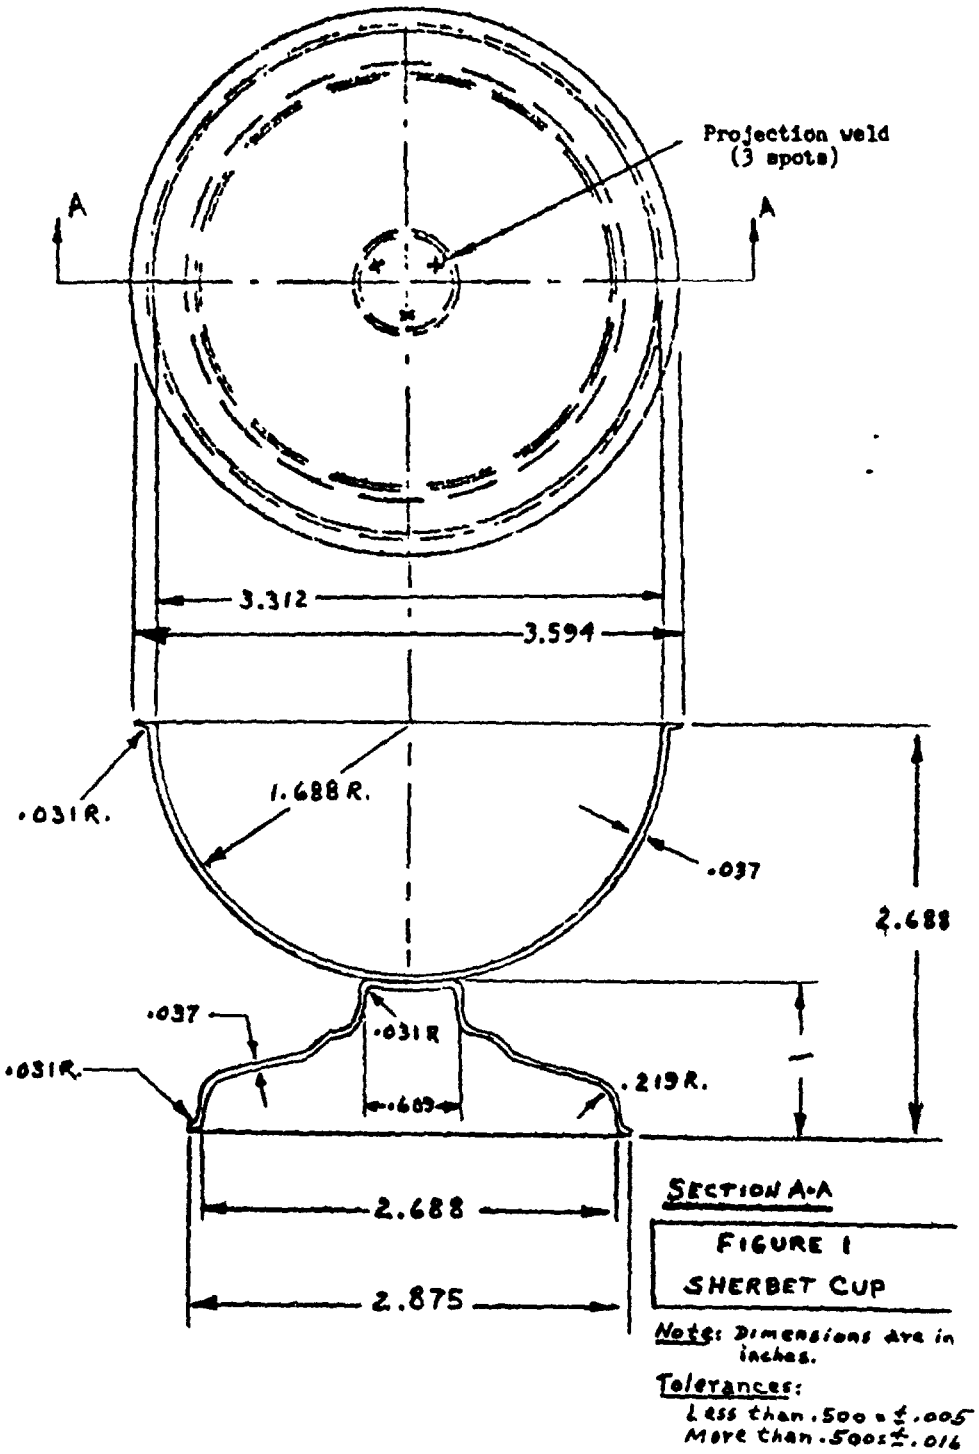


FIGURE 1
SHERBET CUP

Note: Dimensions are in inches.

Tolerances:
Less than .500 ± .005
More than .500 ± .016

U. S. GOVERNMENT PRINTING OFFICE : 1976 - 210-814/1214

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 30 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:12Z
Check the source to verify that this is the current version before use.