SS-P-201d
FEBRUARY 6, 1961
SUPERSEDING
Int. Fed. Spec. SS-P-00201c(GSA-FSS)
July 25, 1960, and
Fed. Spec. SS-P-201a
June 15, 1954

FEDERAL SPECIFICATION

PENCIL, NONMECHANICAL, COLORED LEAD

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 **Scope.**—This specification covers nonmechanical colored lead pencils for general use and duplicating purposes (see 1.2.2).

1.2 **Classification.**

1.2.1 *Pencils.*

1.2.1.1 *Types and classes.*—Colored lead pencils shall be of the following types and classes, as specified (see 6.2):

Type I.—Pigment-type lead.
Class A.—Thin lead.
Class B.—Thick lead.
Type II.—Water-soluble, dye-type lead.
Type III.—Indelible, intense dye-type lead (hectograph).
Type IV.—White correction lead.

1.2.1.2 *Colors.*—Colors for types I, II, and III pencils shall be as specified (see 6.2).

1.2.2 *Sets (types I and II only).*—When specified, types I and II colored lead pencils, as specified in 1.2.1, shall be furnished in sets (see 6.2).

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification to the extent specified herein.

Federal Specifications:

GG-S-236—Sharpeners, Pencil.
UU-P-121—Paper, Bond and Writing, White and Colored.
CCC-T-191—Textile Test Methods.
PPP-B-636—Box, Fiberboard.
PPP-T-60 — Tape; Pressure Sensitive Adhesive, Waterproof—For Packaging and Sealing.

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing.
Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D. C.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:12Z
Check the source to verify that this is the current version before use.

and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

Military Standards:

MIL–STD–105 — Sampling Procedures and Tables for Inspection by Attributes.

MIL–STD–129 — Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material.

3.1.1 *Lead.*—Each lead shall be furnished in one piece, except in pencils having any combination of two colors, and shall be of such materials as to produce smooth, even, and uniform writing when tested as described in 4.5.1.

3.1.2 *Wood casings.*—The casings shall be of seasoned, straight-grained cedar, either Western Incense or Southern Red.

3.2 Construction. — Casings shall enclose the leads in a neat, secure manner. Both halves of the wood casings shall be of uniform construction and securely glued together throughout their entire lengths. Leads shall be centered consistent with commercial practice. When sharpened as specified in 4.5.2, the casing shall have a smooth, even finish, and shall bear no evidence of splitting or tearing of the wood grain.

3.3 Colors. — The pencil lead colors shall correspond to the colors specified in the invitation for bids, and shall possess brilliance, vividness and smoothness, inherent in the color specified. Allowance will be made for slight variations in shades of corresponding colors made by different manufacturers. Except for type IV pencils and unless otherwise specified, the color of the casings shall denote the color of the lead.

3.4 Identification markings.—The casing shall be imprinted with the manufacturer's name or trade name and color number. The casing may also be imprinted with any other identifying markings consistent with commercial practice.

3.5 Length.—Pencils shall be 7 inches long, plus or minus ¼ inch.

3.6 Breaking strength. — Lead breaking strengths shall be as specified herein and shall apply to the following colors only: Blue, brown, green, orange, red, yellow, black and white. Other colors will not be subjected to breaking strength tests (see 3.7.2.4, 3.8.2.4, 3.9.2.3, 3.10.2.4 and 4.5.3).

3.7 Type I, class A pencils.

3.7.1 *Shape.*—Unless otherwise specified, pencils shall be round or hexagonal (see 6.2).

3.7.1.1 *Pencil thickness.*— The diameter of the round pencil shall be not less than 0.290 inch nor more than 0.315 inch. The thickness of the hexagonal pencil, measured across flats, shall be not less than 0.265 inch nor more than 0.295 inch.

3.7.2 *Lead.*

3.7.2.1 *Diameter.*—Lead diameter shall be not less than 0.090 inch nor more than 0.115 inch.

3.7.2.2 *Coloring.*—Lead coloring shall consist essentially of pigments with or without dyes as required. The lead shall not contain aniline or other dyes which are water soluble and can be absorbed by paper.

3.7.2.3 *Wax content.*—Wax content shall be not more than 35 percent by weight of lead when tested as described in 4.5.8.

3.7.2.4 *Breaking strength.*—Lead breaking strength shall average not less than 900 grams when tested as described in 4.5.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:12Z
Check the source to verify that this is the current version before use.

3.7.3 *Colorfastness.*

3.7.3.1 *Water-fastness.*—All colors shall be fast to water (65° ± 5° F.) and shall not smear when tested as specified in 4.5.6.

3.7.3.2 *Light-fastness.*—All colors shall be fast to light and shall show no appreciable fading when subjected to 20 hours exposure as described in 4.5.7. ("Appreciable" means any change which under good light conditions is immediately noticeable upon comparing the tested area with the untested area. If closer examination or a change in the angle of light is required to make color fading apparent, it shall not be considered "appreciable.")

3.8 Type I, class B pencils.

3.8.1 *Shape.*—Pencils shall be round having a diameter of not more than 0.315 inch.

3.8.2 *Lead.*

3.8.2.1 *Diameter.*—Lead diameter shall be not less than 0.140 inch nor more than 0.165 inch.

3.8.2.2 *Coloring.*—Lead coloring shall consist essentially of pigments with or without dyes as required.

3.8.2.3 *Wax content.*—Wax content shall be not more than 35 percent by weight of lead when tested as described in 4.5.8.

3.8.2.4 *Breaking strength.*—Lead breaking strength shall be not less than 850 grams when tested as described in 4.5.3.

3.8.3 *Colorfastness.* — Colorfastness requirements shall be the same as for type I, class A pencils (see 3.7.3).

3.9 Type II pencils.

3.9.1 *Shape.*—Unless otherwise specified, pencils shall be round or hexagonal in shape. Round pencils shall be of the diameter specified in 3.7.1.1; hexagonal pencils, of the thickness specified therein.

3.9.2 *Lead.*

3.9.2.1 *Diameter.*—Lead diameter shall be not less than 0.090 inch nor more than 0.115 inch.

3.9.2.2 *Coloring.*—Lead coloring shall consist of water-soluble dyes with a suitable base. Colors shall not be fast to water and shall wash out to produce clear even tints when tested as described in 4.5.4.

3.9.2.3 *Breaking strength.*—Lead breaking strength shall be not less than 900 grams when tested as described in 4.5.3.

3.10 Type III pencils.

3.10.1 *Shape.*—Pencils shall be round having a diameter of not more than 0.325 inch.

3.10.2 *Lead.*

3.10.2.1 *Diameter.* — Lead diameter shall be not less than 0.115 inch nor more than 0.155 inch.

3.10.2.2 *Coloring.* — Lead coloring shall consist of intense dyes with a suitable base.

3.10.2.3 *Performance.*—Writing on master paper used in the hectograph duplicating process shall be capable of reproducing at least 75 legible copies. Markings made on paper shall be indelible.

3.10.2.4 *Breaking strength.*—Lead breaking strength shall be not less than 850 grams when tested as described in 4.5.3.

3.11 Type IV pencils.

3.11.1 *Shape.*—Pencils shall be round having a diameter of not more than 0.325 inch.

3.11.2 *Lead.*

3.11.2.1 *Diameter.*—Lead diameter shall be not less than 0.140 inch nor more than 0.165 inch.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:12Z
Check the source to verify that this is the current version before use.

3.11.2.2 *Performance.*—Lead shall produce white markings suitable for correcting or marking on hectograph master paper.

3.12 Workmanship.—Colored lead pencils shall be smoothly finished and shall be free from splints, splinters, blisters and any other imperfections which affect appearance or which might impair serviceability.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Inspection responsibility. — Unless otherwise specified (see 6.2), the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 *Sampling and inspection for acceptance.*—Sampling and inspection shall be performed in accordance with the provisions set forth in Military Standard MIL–STD–105, except where otherwise indicated hereinafter. For purposes of sampling, an inspection lot for acceptance inspection and tests shall consist of all pencils of the same type, class, and color or all sets of pencils resulting from a single uninterrupted production run, packed in the same type container and submitted for inspection at one time. Samples selected for inspection, shall be randomly selected and well dispersed throughout the lot, drawn from completely packaged, packed, and marked assembled lots.

4.1.2 *Inspection of components and materials.*—In accordance with 4.1, the supplier is responsible for insuring that components and materials used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein or, if none, in accordance with this specification.

4.2 Inspection of the end item.

4.2.1 *Examination of the end item.*—Examination of the end item shall be in accordance with the classification of defects set forth below. The sample unit and the lot size shall be expressed as indicated in the applicable examination paragraph. The inspection levels and acceptable quality levels shall be as indicated in 4.2.1.5.

4.2.1.1 *Examination of the end item for defects in appearance, construction and workmanship.*—The lot size for determining the sample size shall be expressed in units of one package (1 dozen pencils) or one set. The sample unit shall consist of one pencil from each package or set.

4.2.1.2 *Examination of the end item for dimensional defects.*—The lot size for determining the sample size shall be expressed in units of packaged (1 dozen) or one set. The sample unit shall be one pencil from each package or set.

4.2.1.3 *Examination for count.* — The sample unit for this examination shall be one package or one set of pencils. The lot size shall be expressed in the number of packages or sets of pencils.

4.2.1.4 *Examination for defects in packaging, packing, and marking.*—The sample unit for this examination shall be one shipping container. The lot size shall be expressed in the number of shipping containers in the lot. Classification of defects shall be in accordance with Military Standard MIL–STD–105, as shown in table I:

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:12Z
Check the source to verify that this is the current version before use.

TABLE I.—*Classification of defects*

Categories[1]	Defects
Critical:	None defined.
Major:	
101	Shape and design not as specified.
102	Casing not straight-grain Western, Incense or Southern Red Cedar.
103	Casing does not enclose the lead in a neat secured manner.
104	Both halves of casing not of uniform construction.
105	Casing and lead not securely glued throughout the entire length of pencil.
106	Lead not centered.
107	Casing not of same color as lead (except type IV and when otherwise specified).
108	Finish damaged or blemished, clearly noticeable.
109	Lead does not correspond to the color specified.
110	Not smoothly finished. Splits, splinters, blisters or other imperfections which would affect appearance or impair serviceability.
111	Marking of manufacturer's name, trade name, color number or other identification marking applicable, is missing, incomplete, incorrect, or illegible.
112	Pencil is warped, cracked or fractured.
113	Pencil length not as specified.
114	Pencil diameter not as specified.
115	Lead diameter not as specified.
Minor:	
201	Quantity in package less than specified or indicated.
202	Marking of shipping container and intermediate packages incorrect, illegible, missing, incomplete, of improper size, location, sequence or method of application. Service color or other special marking missing, incorrect or illegible (when applicable).
203	Use of any nonconforming materials or component; component missing, damaged or otherwise defective affecting serviceability.
204	Incomplete closure of case liner, container flaps, loose strapping, bulging or distortion of container. Damaged, broken or bruised container that might cause damage to contents.
205	Any unfilled areas of shipping containers not properly filled with adequate cushioning material to prevent shifting or movement of contents.

TABLE I.—*Classification of defects (Cont.)*

Categories[1]	Defects
Minor: (Cont.)	
206	Number of items per shipping container more or less than specified or indicated quantity. More than one type, class, or color and item included in any one shipping container unless otherwise indicated or permitted in contract or order. Packing lists (see par. 6.8.1 of Military Standard MIL–STD–129) are incomplete, incorrect, missing or not properly contained with shipment (when applicable).
207	Gross weight exceeds requirement.

[1] Numerals listed adjacent to description of defects are for use of inspection in recording of defects.

4.2.1.5 *Inspection levels and acceptable quality levels (AQL's) for examinations.*—The inspection levels, for determining the sample size, and the acceptable quality levels (AQL's), expressed in defects per 100 units, shall be as follows:

For examination in paragraph	*Inspection levels*	*AQL's*
4.2.1.1	I	2.5
4.2.1.2	L–3	2.5
4.2.1.3	L–5	4.0
4.2.1.4	L–5	4.0

4.3 Testing of the end item.—Tests shall be performed in accordance with table II for the characteristics specified therein. The sample unit shall be one pencil of each color. The lot size for the purpose of determining sample size shall be expressed in the number of packages (1 dozen) or sets constituting the lot. The inspection levels and acceptable quality levels (AQL's) shall be as indicated in table II.

4.4 Sampling for tests.—The sample unit for all tests shall consist of four pencils or

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:12Z
Check the source to verify that this is the current version before use.

one set of various colored pencils randomly selected from the lot.

4.5 Tests.—Samples of pencils or pencil sets, selected in accordance with 4.4, shall be subjected to the test provisions specified in table II. The test paper used in the test methods of 4.5.4, 4.5.6, and 4.5.7 shall be Dietzen #192–M Edvell medium-weight tracing vellum or equal.

4.5.1 *Performance.*—Sample pencils shall be sharpened to a point at three different points in a pencil sharpener conforming to type II of Federal Specification GG–S–236. Pencils shall be tested at each point by drawing a line equivalent to 24 inches under ordinary writing pressure on type IV bond paper conforming to Federal Specification UU–P–121.

4.5.2 *Casing.*—Casings shall be examined after the pencils have been sharpened as described in 4.5.1 to determine conformance with 3.1.2 and 3.2.

4.5.3 *Lead breaking strength.* — Pencils shall be sharpened in a pencil sharpener conforming to type II of Federal Specification GG–S–236. Type I, class A and type II pencils shall be sharpened to points having diameters between 0.049 and 0.050 inch. Type I, class B pencils shall be sharpened to points having diameters between 0.072 and 0.075 inch. (The specified diameter may be readily obtained by the use of a simple mechanical device conforming in set-up to the cutting angle of the pencil sharpener or by sharpening to a fine point in the pencil sharpener and then filing the tip down to the proper diameter.) After being pointed to the required diameter the pencils shall be placed in a rigid holder set to maintain a constant angle of 45 degrees between the pencil and the platform (see fig. 1). The pencil shall extend beyond the underside of the block 1¼ to 1½ inches, measured along the pencil to the sharpened point. The scale platform shall be smooth and offer practically no resistance to the point moving across its surface. Pressure shall be applied by pushing the rod down gradually and uniformly in order to avoid variations and shock. If a lead crumbles, it shall be cause for rejection. Splintering or chipping of leads at offset of tests shall be cause for rejection. Readings shall be taken at the instant of breaking, provided the breaking point is definite and does not develop into a general crumbling. Not less than four pencils shall be used and each pencil shall be subjected to not less than four tests. The breaking strength of the leads shall be the average of all determinants.

4.5.4 *Solubility (for type II pencils).*— Draw several small figures on a piece of test paper (see 4.5) using firm pressure. Wet the marked area with clear tap water (temperature 65° ± 5° F.) using an artist's type camel's-hair brush. Keep brush moistened and brush marked area as though painting with water-color paints. Observe the solubility of the colored lead deposit on the test paper. Color should run and tint unmarked area of test paper.

4.5.5 *Continuity of lead.* — During the strength test described in 4.5.3, the lead shall be examined to determine continuity of lead. More than two breaks in each pencil lead, resulting from strength test, will not be acceptable.

4.5.6 *Water-fastness (for type I pencils).*— Inscribe a line 6 inches long on a piece of test paper (see 4.5) using firm pressure. Immerse the marked sheet in a vessel of clear tap water (temperature 65° ± 5° F.) so as to cover the marked area completely. After 2-minute immersion, remove the sheet of test paper and permit the sheet to dry. Observe the marked area.

4.5.7 *Light-fastness (for type I pencils).*— The fastness of color to light shall be determined as described in Federal Specification CCC–T–191, Method 5660 with the following exceptions: (a) a colored area 2 inches by 4 inches on test paper (see 4.5) shall be

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:12Z
Check the source to verify that this is the current version before use.

TABLE II.—*Instructions for testing*

Characteristic	Specification reference		Requirements applicable to—		Number determinations per unit	Results reported as—		Inspection level	AQL
	Requirement	Test method	Individual unit	Lot average		Pass or fail	Numerically to nearest—		
Continuity of lead	3.1.1	4.5.5	X	--	1	--	Number of breaks	L–2	4.0
Performance:									
All types	3.1.1	4.5.1	X	--	3	--	--	L–2	4.0
Type III	3.10.2.3	---	X	--	1	--	--	L–2	4.0
Type IV	3.11.2.2	---	X	--	1	--	--	L–2	4.0
Breaking strength:	3.6					X	Gram	L–2	--
Type I, class A	3.7.2.4	4.5.3	--	X	[1] 4	X	Gram	L–2	--
Type I, class B	3.8.2.4	4.5.3	--	X	[1] 4	X	Gram	L–2	--
Type II	3.9.2.3	4.5.3	--	X	[1] 4	X	Gram	L–2	--
Type III	3.10.2.4	4.5.3	--	X	[1] 4	X	Gram	L–2	--
Wax content	3.7.2.3, Class A	4.5.8	--	X	4 (composite)	X	Percent	L–2	--
	3.8.2.3, class B	4.5.8	--	X	4 (composite)	X	Percent	L–2	--
Water-fastness, type I	3.7.3.1	4.5.6	X	--	1	--	Trace	L–2	4.0
Light-fastness, type I	3.7.3.2	4.5.7	X	--	1	--	Trace	L–2	4.0
Solubility, type II	3.9.2.2	4.5.4	X	--	1	--	Trace	L–2	4.0

[1] Not less than four pencils shall be used and each pencil shall be subjected to not less than four tests.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:12Z
Check the source to verify that this is the current version before use.

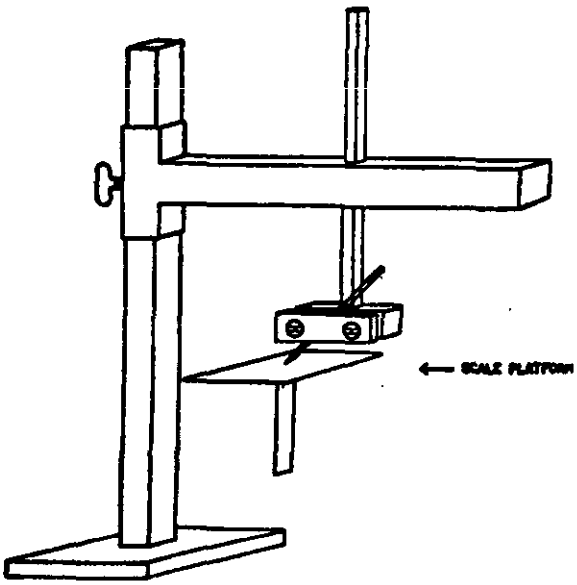


FIGURE I.—*Holder.*

placed in the apparatus so that one-half of the colored area is exposed to the radiation and (b) the time of exposure shall be 20 hours.

4.5.8 *Wax content.* — Approximately 5 grams of the marking medium separated from the outer casing shall be reduced to a coarse powder. Place the sample in a paper thimble (Whatman No. 1 or equal), and extract with petroleum ether for a minimum of 4 hours in a Soxhlet extractor, using a previously weighed flask. Evaporate the petroleum ether over a steam bath and cool flask in a desiccator. Weigh flask and petroleum ether soluble material, then calculate and express the results as percentage by weight based on the original weight of the sample.

5. PREPARATION FOR DELIVERY

(Definitions and applications of the various levels of packaging and packing protection, for civil agencies, shall be as defined in Federal Standard No. 102.)

5.1 Packaging.—Pencils shall be packaged level A, B or C, as specified in the contract or order (see 6.2).

5.1.1 *Level A.*—Pencils (not in sets) shall be packaged 12 each per folding carton or paperboard sleeve. Three or six such containers shall then be packaged in a set-up box or folding carton. Cartons shall contain only one type, class, and color of pencils. Pencil assortment, colored in sets, shall be packaged 12, 24 or 36 as specified, per folding carton or paperboard sleeve (see 6.2).

5.1.2 *Level B (civil agencies).*

5.1.2.1 *Unit packaging.*—Unless otherwise specified, 12 pencils (not in sets) of one type, class and color, (as applicable), shall be packaged in a paperboard open-end sleeve, clear plastic tray, folding carton, or other suitable container in accordance with the manufacturers regular commercial practice. Sets of pencils (see 1.2.2), when ordered, shall be packaged as specified in the invitation for bids, contract, or order (see 6.2).

5.1.2.2 *Intermediate packaging.* — Unless otherwise specified, 6 unit packages of pencils of one type, class and color, (as applicable), shall be packaged in a paperboard box or carton in accordance with the manufacturer's regular commercial practice. Intermediate packaging of sets of pencils (see 1.2.2), when required, shall be as specified in the invitation for bids, contract, or order (see 6.2).

5.1.3 *Level C.*—Pencils shall be packaged in accordance with the manufacturer's regular commercial practice.

5.2 Packing.—Pencils packaged level A, B or C, shall be packed level A, B or C, as specified in the contract or order (see 6.2).

5.2.1 *Level A.*—Pencils shall be packed in corrugated or solid fiberboard boxes conforming to Federal Specification PPP–B–636, class 2, grade V3c or V3s. The gross weight of boxes shall not exceed the weight limitations of the box specification. Fiberboard boxes shall be closed and strapped in conformance with the appendix to the box

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:12Z
Check the source to verify that this is the current version before use.

specification. In addition, all joints and seams including those occurring in the manufacture of the boxes shall be covered with minimum 2-inch-wide pressure-sensitive tape conforming to Federal Specification PPP–T–60. Tape shall extend over all corners and edges at least 3 inches.

5.2.2 *Level B.*

5.2.2.1 *Military agencies.*—Pencils shall be packed in corrugated or solid fiberboard boxes conforming to Federal Specification PPP–B–636, class 1. The gross weight of boxes shall not exceed the weight limitations of the box specification.

5.2.2.2 *Civil agencies.*—Unless otherwise specified, 20 intermediate boxes or cartons of 6-dozen (6 units) each, a total of 120-dozen pencils of one type, class and color, (as applicable), shall be packed in a shipping container conforming to the requirements of Federal Specification PPP–B–636, type I or II, class 1; closure being in accordance with the appendix thereto. Sets of pencils (see 1.2.2), when ordered, shall be packed as specified in the invitation for bids, contract or order (see 6.2).

5.2.3 *Level C.* — Pencils shall be packed in containers of the type, size and kind commonly used for the purpose, in a manner that will insure acceptance by common carrier and safe delivery at destination. Shipping containers shall comply with the carrier rules and regulations applicable to the mode of transportation.

5.3 Marking.

5.3.1 *Civil agencies.* — Unless otherwise specified, shipments shall be marked in accordance with Federal Standard No. 123, including specification classification (such as type, class, color, etc., as applicable).

5.3.2 *Military agencies.* — In addition to any special marking required by the contract or order, intermediate and shipping containers shall be marked in accordance with Military Standard MIL–STD–129.

5.4 Standard pack (civil agencies).—The standard pack requirements for the items covered by this specification shall be as specified in 5.1.2, 5.2.2.2, and 5.3.1. (See 6.4.)

6. NOTES

6.1 Intended use.

6.1.1 *Type I* pencils are used for obtaining water-fast and light-fast markings.

6.1.2 *Type II* pencils are used for obtaining wash, transparent and indelible effects.

6.1.3 *Type III* pencils are used to write on master paper used in the hectograph duplicating process.

6.1.4 *Type IV* pencils are used in making corrections on hectograph master paper.

6.2 Ordering data.—Purchasers should exercise any desired options offered herein (see 5.1.2.1, 5.1.2.2, and 5.2.2.2) and should specify the following (see 6.3 and 6.4):

(*a*) Title, number, and date of this specification.

(*b*) Type of pencil required (see 1.2.1.1).

(*c*) Class required when type I is specified (see 1.2.1.1).

(*d*) Color required for types I, II, and III pencils (see 1.2.1.2).

(*e*) When type I and type II pencils are required in sets, number of pencils and color assortment to a set; class desired for type I pencils; and packaging, packing, and any special marking requirements (see 1.2.2, 5.1.1, and 5.1.2).

(*f*) When color of casing does not have to correspond with lead color (see 3.3).

(*g*) If specific shape is desired for type I, class A or type II pencils (see 3.7.1 and 3.9.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:12Z
Check the source to verify that this is the current version before use.

(*h*) Data, as required, regarding examination and tests; and inspection responsibility (for civil agencies only) if other than as specified (see 4.1).

(*i*) Both the level of packaging and the level of packing required (see 5.1 and 5.2).

(*j*) Packaging, packing, and any special marking required when sets are to be furnished (see 1.2.2, 5.1.2, and 5.2.2.2).

6.3 Military standards. — Items procured under this specification for military use are to be limited to the variety shown on the applicable military standards. Personnel of the departments are requested to refer to these documents for guidance.

6.4 The Standard Pack requirements in paragraphs 5.1.2, 5.2.2.2, and 5.3.1 are intended for use in procurements of Stores stock replenishments. Procuring officers should use the Standard Pack provisions when it is known that the material will be shipped from a supplier to a domestic warehouse, supply depot or intermediate storage point for temporary storage, subsequent issue and/or shipment to eventual user.

6.5 Transportation data.—Transportation description and minimum weights applicable to this commodity are:

Rail:

Lead pencils, wooden, other than mechanical or ball point. Carload minimum weight 24,000 pounds, subject to Rule 34, Uniform Freight Classification.

Motor:

Lead pencils, wooden, other than mechanical or ball point. Truckload minimum weight (w) 24.6 pounds, (w) subject to Rule 34, National Motor Freight Classification.

Notice. — When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MILITARY CUSTODIANS:
Army—Q
Navy—S
***Air Force*—MOAMA.**

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:12Z
Check the source to verify that this is the current version before use.