MIL-C-12520/3A(EL)
5 November 1965
SUPERSEDES
MIL-C-12520/3
3 June 1959

MILITARY SPECIFICATION

# CONNECTORS, PLUG, ELECTRICAL, WATERPROOF (CATHEDRAL SHAPE, SHELL SIZE 26, FEMALE INSERTS)

## 1. SCOPE

1.1 Scope.- This specification covers the detail requirements for the following types of field-serviceable, shell-size 26, cathedral-shape, waterproof, electrical-plug connectors with female inserts:

| | |
|---|---|
| UW1326FC19 | UW1326FE31 |
| UW1326FC21 | UW1326FE33 |
| UW1326FC23 | UW1326FF25[1] |
| UW1326FC25 | UW1326FF27[1] |
| UW1326FD25 | UW1326FF29[1] |
| UW1326FD27 | UW1326FF31[1] |
| UW1326FD29 | UW1326FF33[1] |
| UW1326FD31 | UW1326FG25 |
| UW1326FD33 | UW1326FG27 |
| UW1326FE25 | UW1326FG29 |
| UW1326FE27 | UW1326FG31 |
| UW1326FE29 | UW1326FG33 |

1.2 Ratings.- Connectors covered by this specification shall have the electrical ratings specified in table 1.

Table 1 - Electrical ratings

| Connector type | Limiting operating voltage (sea level) AC | Limiting operating voltage (sea level) DC | Nominal current Amperes |
|---|---|---|---|
| UW1326FC19 to UW1326FC25, incl | 900 | 1,250 | 22 |
| UW1326FD25 to UW1326FD33, incl | 500 | 700 | 22 |
| UW1326FE25 to UW1326FE33, incl | 500 | 700 | 11 |
| UW1326FF25 to UW1326FF33, incl | 500 | 700 | 11 |
| NW1326FG25 to UW1326FG33, incl | 900 | 1,250 | 73 |



FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:55Z
Check the source to verify that this is the current version before use.

## 2. APPLICABLE DOCUMENTS

2.1 The following specifications, of the issue in effect on date of invitation for bids, form a part of this specification:

SPECIFICATIONS

MILITARY

| | |
|---|---|
| MIL-C-12520 | Connectors, Plug and Receptacle (Electrical, Waterproof); and Accessories; General Specification for. |
| MIL-C-12520/10A | Connectors, Receptacle, Electrical, Waterproof (Shell Size 26, Male Inserts). |

(Copies of specifications required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

## 3. REQUIREMENTS

3.1 Requirements.- Requirements shall be in accordance with Specification MIL-C-12520, and as specified herein.

3.2 Design and construction.- Connectors shall be of the design, construction, and physical dimensions specified on figure 1.

3.2.1 Assembly.- Connectors shall be capable of being disassembled to allow access to the contact terminals without the use of special tools.

3.3 Voltage drop.- The voltage drop shall not exceed 21 millivolts for insert-arrangements C and D, 20 millivolts for insert-arrangement E or F, or 12 millivolts for insert-arrangement G. (See 4.4).

3.4 Marking.- Marking shall be in accordance with Specification MIL-C-12520, except that connectors shall be marked with letters approximately 1/8 inch high.


## 4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection.- Sampling and inspection shall be in accordance with Specification MIL-C-12520, and as specified herein.

4.2 Test and mating receptacles.- The test and mating receptacles shall be in accordance with the applicable type covered by MIL-C-12520/10A.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:55Z
Check the source to verify that this is the current version before use.

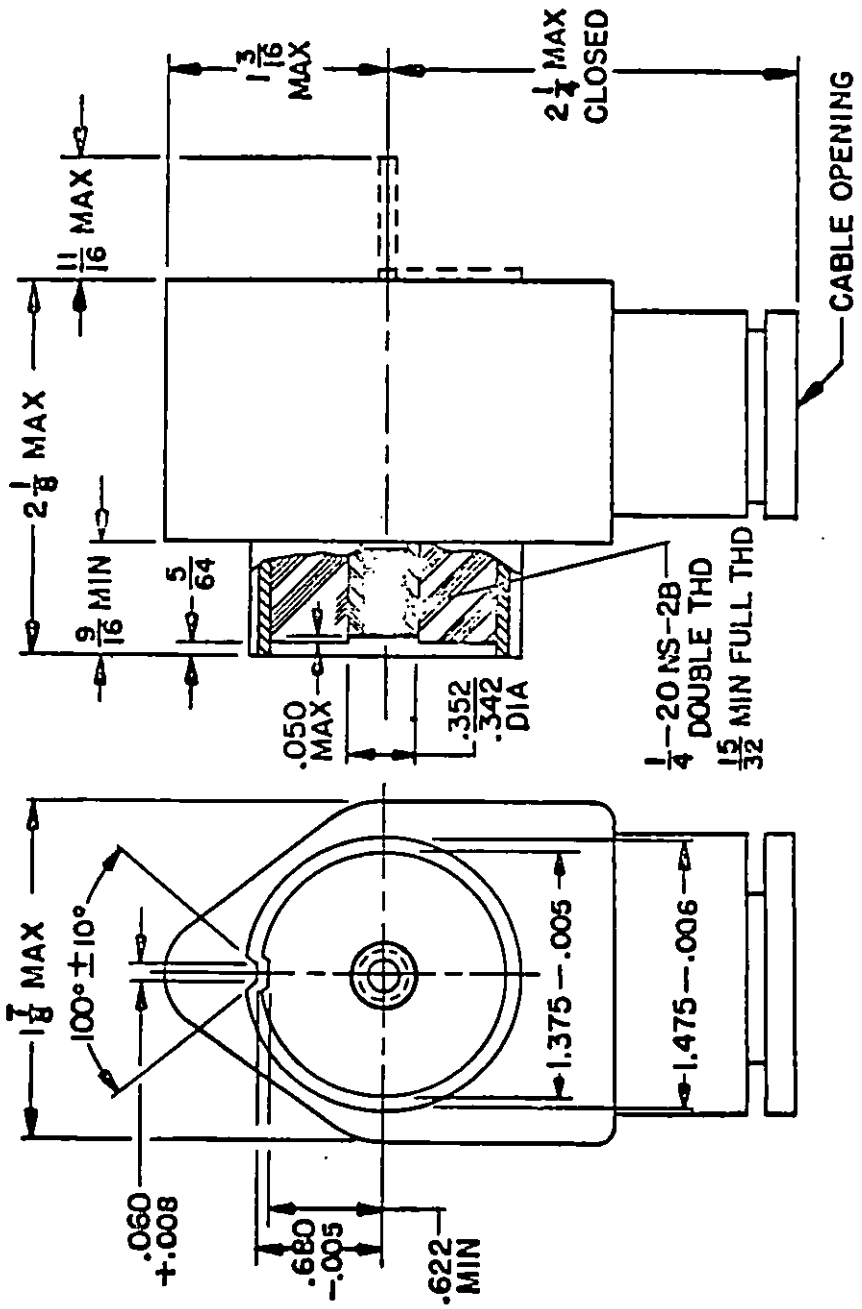


1. All dimensions in inches.
2. Unless otherwise specified, tolerances are ± 1/64 on fractions.

FIGURE 1. *Plug shell and female insert dimensions*



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:55Z
Check the source to verify that this is the current version before use.

4.3 Dielectric withstanding voltage.- Connectors with insert-arrangements C and G shall be subjected to a test potential of 2,800 volts root mean square (rms). Connectors with insert-arrangements D, E, and F shall be subjected to a test potential of 2,000 volts rms.

4.4 Voltage drop (see 3.3).- The test current for connectors shall be 20 amperes dc for insert-arrangements C and D, 10 amperes dc for insert-arrangements E and F, and 60 amperes dc for insert-arrangement G.

## 5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with Specification MIL-C-12520.

## 6. NOTES

6.1 Notes.- In addition to the notes specified herein, the notes specified in MIL-C-12520 are applicable to this specification.

6.2 Intended use.- Connectors covered by this specification are intended for use where field-serviceable, waterproof, electrical connectors are required.

6.2.1 Mating receptacle connectors.- Mating receptacle connectors are in accordance with Specification MIL-C-12520/10A.

6.2.2 Cover and chain assemblies.- Cover and chain assemblies are in accordance with style 3X of Specification MIL-C-12520/12A"Cover and Chain Assemblies (External Threads, for Use on Waterproof Connectors)".

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

CUSTODIAN

EL

Preparing activity

EL

Project Nr. 5935-A135



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:55Z
Check the source to verify that this is the current version before use.