MIL-I-25861D(USAF)
30 November 1967
Superseding
MIL-I-25861C(USAF)
25 October 1966

MILITARY SPECIFICATION

INDICATOR, PRESSURE, HYDRAULIC, 0-4000 PSI INTEGRALLY LIGHTED

1. SCOPE

1.1 This specification covers the requirements for integrally lighted 0-4000 psi hydraulic pressure indicators.

1.2 Classification. Indicators shall be of the following types, as specified (see 6.2):

AGU-1/U	Cover glass coated with antireflection coating per MIL-C-675
AGU-1A/U	Cover glass coated with Multilayer antireflection coating of high efficiency (superior to coating specified for AGU-1/U indicator) with red lighting
AGU-1B/U	Cover glass coated with multilayer antireflection coating of high efficiency (superior to coating specified for AGU-1/U indicator) with white lighting

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

PPP-B-601	Boxes, Wood, Cleated-Plywood
PPP-B-636	Box, Fiberboard

Military

MIL-P-116	Preservation, Methods of
MIL-C-675	Coating of Glass Optical Elements (Anti-reflection)
MIL-C-5541	Chemical Films and Chemical Film Materials for Aluminum and Aluminum Alloys
MIL-S-7742	Screw Threads, Standard, Optimum Selected Series: General Specification for
MIL-A-8625	Anodic Coatings, for Aluminum and Aluminum Alloys
MIL-S-20708	Synchros, General Specification for
MIL-T-25307	Transmitter, Pressure, Hydraulic, Type MJ-1

FSC 6685

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:23Z
Check the source to verify that this is the current version before use.

MIL-L-25467	Lighting, Integral, Aircraft Instrument, General Specification for
MIL-L-27160	Lighting, Instrument, Integral, White, General Specification for

STANDARDS

Federal

FED-STD-595	Colors

Military

MIL-STD-100	Engineering Drawing Practices
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-143	Specifications and Standards, Order of Precedence for the Selection of
MIL-STD-461	Electromagnetic Interference Characteristics Requirements for Equipment
MIL-STD-781	Reliability Tests Exponential Distribution
MIL-STD-785	Requirements for Reliability Program (for Systems and Equipment)
MIL-STD-810	Environmental Test Methods
MIL-STD-831	Test Reports, Preparation of
MIL-STD-1186	Cushioning, Anchoring, Bracing, Blocking, and Waterproofing, with Appropriate Test Methods
MS33558	Numerals and Letters, Aircraft Instrument Dial, Standard Form of
MS33585	Pointers, Dial, Standard Design of Aircraft Instrument
MS33586	Metals, Definition of Dissimilar
MS33639	Cases, Instrument, Clamp Mounted, Aircraft

(Copies of documents required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Qualification. The indicators furnished under this specification shall be products which are qualified for listing on the applicable qualified products list at the time set for opening of bids (see 4.4 and 6.3).

3.2 Selection of specifications and standards. Specifications and standards for necessary commodities and services not specified herein shall be selected in accordance with MIL-STD-143.

3.3 Materials

3.3.1 Nonmagnetic materials. Nonmagnetic materials shall be used for all parts of the indicator, except where magnetic materials are essential.

3.3.2 Nonferrous materials. Nonferrous materials shall be used for all parts of the indicator, except where ferrous materials are essential.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:23Z
Check the source to verify that this is the current version before use.

3.3.3 Metals. Metals shall be corrosion-resistant or suitably treated to resist corrosion due to fuels, salt spray, or atmospheric conditions likely to be met in storage or normal service.

3.3.4 Dissimilar metals. Unless suitably protected aginst electrolytic corrosion, dissimilar metals shall not be used in intimate contact with each other. Dissimilar metals are defined in MS33586.

3.3.5 Toxic and corrosive fumes. The indicator shall be of such material and construction that fumes, when burned, or gases that combine with the atmosphere to form acid or corrosive alkali will not be liberated.

3.3.6 Protective treatment. When materials are used in the construction of the indicator that are subject to deterioration when exposed to climatic and environmental conditions likely to occur during service usage, they shall be protected against such deterioration in a manner that will in no way prevent compliance with the requirements of this specification. The use of any protective coating that will crack, chip, or scale with age or extremes of climatic and environmental conditions shall be avoided.

3.4 Design and construction. The indicator shall be designed for use with the Type MJ-1 transmitter conforming to MIL-T-25307.

3.4.1 Case. The case shall be hermetically sealed and the dimensions shall conform to MS33639 for the 1-inch size. Dimension L shall be 3.00 ±0.25 inches.

3.4.1.1 Cap. A separate nonhermetically sealed cap may be used on the back of the case for installing the electrical receptacle. The cap shall be made of nonferrous, low-density metal.

3.4.1.2 Case to cover glass distance. The distance between the outer surface of the cover glass and the front edge of the case shall be the minimum practicable and shall not exceed 1/32 inch.

3.4.1.3 Filling medium. The filling medium shall be of at least 98 percent purity, free of dust particles, and shall contain no more than 0.006 milligram of water vapor per liter (dewpoint -65°C) at the filling pressure. The filling medium shall be 88 to 92 percent nitrogen and the remainder helium. The absolute pressure of the filling medium in the case shall be 12 to 14.7 psi. Other concentrations of helium shall not be used except with prior approval of the procuring activity.

3.4.2 Lighting. The indicators shall be integrally lighted and shall meet all requirements specified herein. The AGU-1/U and AGU-1A/U indicators shall be lighted in accordance with MIL-L-25467 and the AGU-1B/U indicator shall be lighted in accordance with MIL-L-27160.

3.4.3 Pointer. The pointer shall conform to MS33585-9 and figure 1 and shall be suitable for integral lighting.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:23Z
Check the source to verify that this is the current version before use.

3.4.3.1 Pointer finish. The lighted portion of the pointer shall be finished in accordance with FED-STD-595, color No. 37875.

3.4.4 Dial. The dial shall conform to figure 1. A minimum diameter of 15/16 inch shall be maintained across the outside ends of the graduations. The graduation for 2,000 psi shall be located on the horizontal centerline at the left side of the dia. The 500-psi increment graduations shall be 40° ±0° 15' apart.

3.4.4.1 Dial markings. The dimensions and colors of the dial markings shall be as specified in table I. Colors shall conform to FED-STD-595.

3.4.4.2 Finish of markings not otherwise specified shall be color No. 37038 of FED-STD-595.

3.4.4.3 Dial visibility. Portions of the minor graduations on the dial shall be visible when viewed from any position within the frustum of a cone the side of which intersects the outer edge of the cover glass and which makes an angle of 30° with the perpendicular through the center of the dial.

3.4.4.4 Dial to cover glass distance. The distance between the indicator dial and the inside of the cover glass shall be the minimum practicable and shall not exceed 0.188 inch on the indicator.

3.4.5 Filler tube. A tube or other facility for evacuating and filling the case shall be provided at the rear of the case and shall be recessed beneath the level of the back plate surface. If a tube is used, it shall be of such length as to permit three refillings of the case.


3.4.6 Cover glass. The cover glass shall be clear, flat, and free from flaws that would interfere with the normal reading of the instrument. The thickness of the cover glass shall be the minimum practicable and entirely suitable for the purpose.


3.4.7 Fasteners. The dial shall be securely fastened to the frame of the mechanism in such a manner that it will not loosen or turn when the indicator is vibrated. If screws are used for attaching the dial, they shall be so located that they will not interfere with dial markings or prevent the markings from being located in the proper position.

3.4.8 Electrical zero reference mark. The dial shall be provided with an electrical zero reference mark on the scale portion equidistant in angular degrees between the first and last dial graduations.

3.4.9 Electrical connector. The indicator shall be provided with an electrical connector, Cannon part No. MC-14H-10-6PN, or equal, which shall mate with Cannon part No. MC-11E-10-6N, or equal. The electrical connector shall have the polarizing key at the top.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:23Z
Check the source to verify that this is the current version before use.

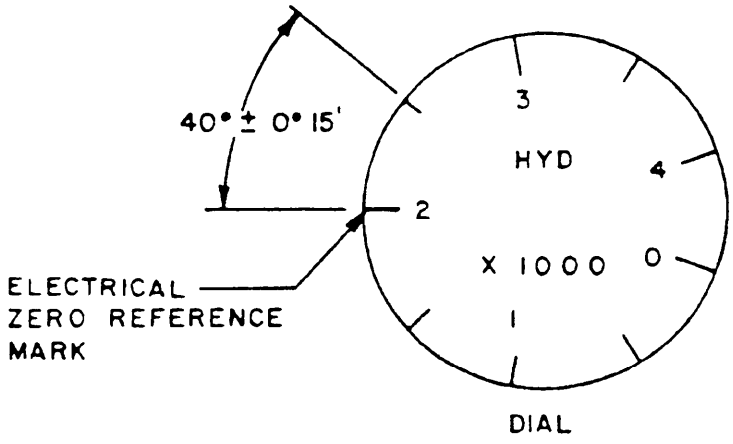

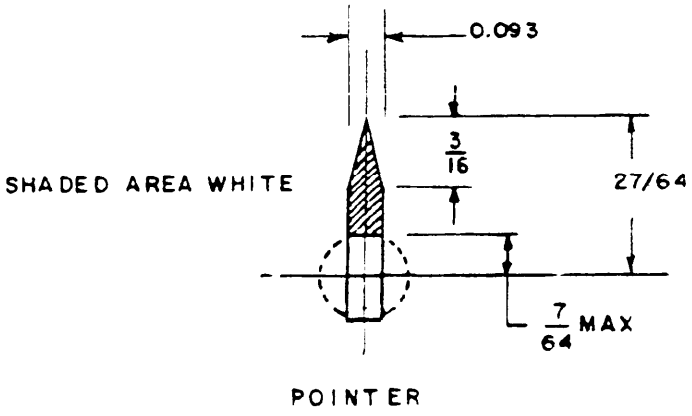

DIMENSIONS IN INCHES
UNLESS OTHERWISE SPECIFIED
TOLERANCES: FRACTIONS ± 1/64
DECIMALS ± 0.010

FIGURE 1. Dial and Pointer

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:23Z
Check the source to verify that this is the current version before use.

TABLE I. Dial Marking Dimensions and Colors

	Height or Length, Inch ±1/64	Width of Line or graduation, Inch ±0.005	Color No.
Numerals 0, 1, 2, 3, 4	3/32	0.0213	37875
Graduations at 0, 1,000, 3,000, 4,000	9/64	0.030	37875
Graduation at 2,000	8/64	0.030	37875
500 psi graduations	7/64	0.015	37875
Lettering HYD	5/64	0.015	37875
Lettering X 1000	5/64	0.010	37875
Background of dial	---	----	37038

3.4.10 Electrical wiring. The internal and external wiring of the indicator shall be in accordance with figure 2.

3.4.11 Indicator synchro. The indicator synchro shall consist of a salient two-pole wound rotor used as the primary and shall be designed for 26V, 400-cycle, as required, single-phase power, with wye-connected stators as the secondaries. The stators shall be so wound that the amplitudes of the induced voltages measured between any two stator leads will vary approximately sinusoidally with the angular positions of the rotor. Pivots, bearings, and gears shall not bind nor shake and shall be as nearly frictionless as possible.

3.4.11.1 The synchro receiver used shall have electrical characteristics compatible with those defined in MIL-S-20708.

3.4.12 Secondary voltage. The maximum open-circuit voltage measured between any two secondary leads shall be 11.8V ±3 percent.

3.4.13 Reliability program. The contractor shall establish a reliability program in accordance with MIL-STD-785.

3.4.13.1 Reliability. The indicator shall have a minimum mean-time-between-failures (MTBF) of 2,000 hours based upon a discrimination ratio of 1.5 and a confidence factor of 90 percent.

3.4.14 Longevity. The indicator shall have an operating life span of 3,000 hours.

Source: https://assist.dla.mil -- Downloaded: 20260-20T07:23Z
Check the source to verify that this is the current version before use.

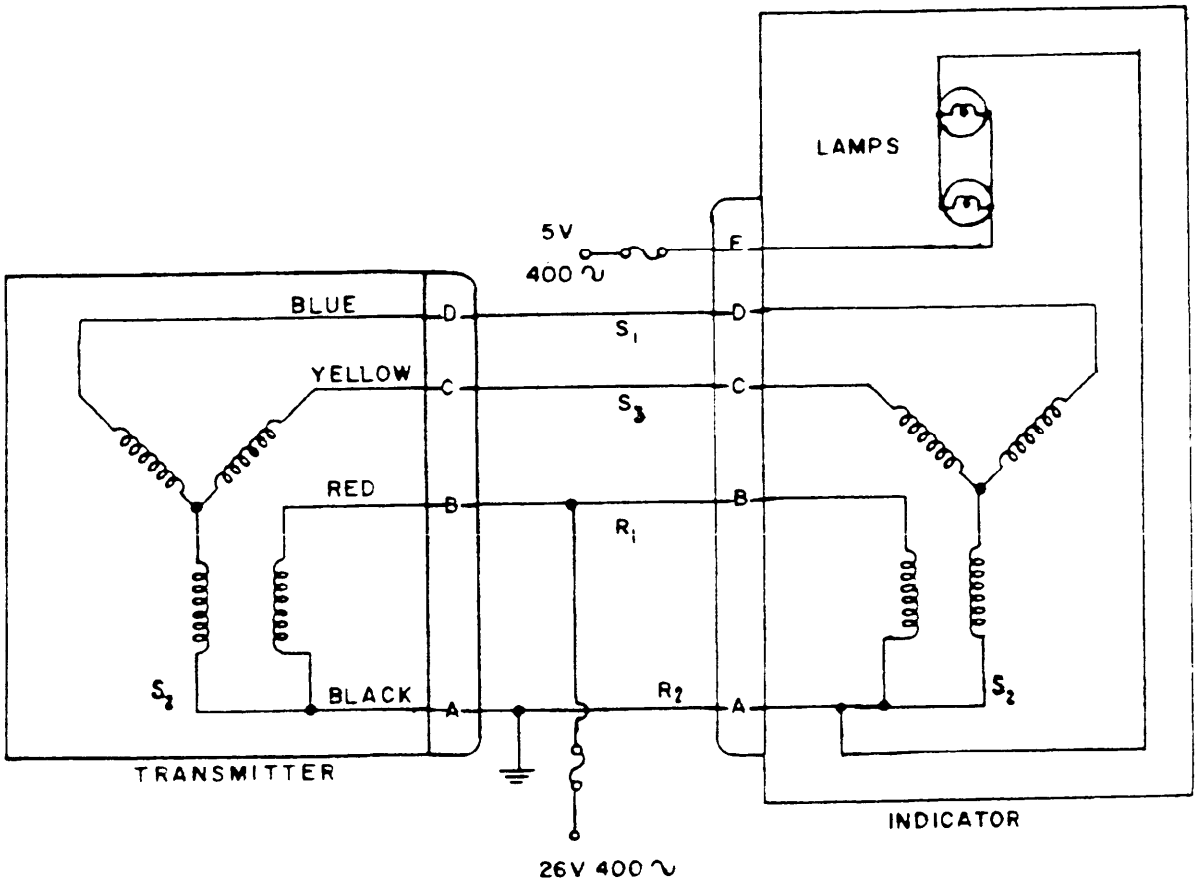


FIGURE 2. Wiring Diagram

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:23Z
Check the source to verify that this is the current version before use.

3.5 Performance. The indicator shall operate satisfactorily after subjection to the following conditions:

a. Temperatures - temperatures ranging from -65° to +71°C

b. Vibration - vibration of 2g's from 5 to 500 cps

c. Temperature-altitude - pressure altitude of 100,000 feet at -55°C

d. Thermal shock - eight cycles of alternate immersions in tap water at 85° ±2°C and 5° ±2°C

e. Salt fog - exposure to salt sea atmosphere for 48 hours without evidence of corrosion or deterioration

3.5.1 Tolerances. The indicator shall operate within the tolerances specified in tables II and III.

TABLE II. Scale Error Tolerances

PSI	Tolerance ±PSI	PSI	Tolerance ±PSI
0	50	2,500	50
500	50	3,000	50
1,000	50	3,500	50
1,500	50	4,000	50
2,000	50		

TABLE III. Test Tolerances

Test	Tolerance ± PSI
Position error at 2,500 psi	25
Friction	
Room Temperature	50
High Temperature	50
Low Temperature	75
Vibration	
Pointer Oscillation	50
Pointer Variation	50
Scale Error	
Low Temperature	50
High Temperature	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:23Z
Check the source to verify that this is the current version before use.

3.5.2 Dielectric strength. The indicator shall withstand 200V rms at a commercial frequency for a period of 5 seconds.

3.5.3 Case leakage. Case leakage shall not exceed 0.1 micron cubic foot per hour.

3.5.4 Fogging. There shall be no evidence of moisture or oil fogging of the cover glass when the indicator is subjected to a temperature of 85° ±5°C for a minimum period of 2 hours and then the face of the cover glass immediately immersed in an ice bath for 3 minutes.

3.5.5 Reflectance. The AGU-1/U indicator cover glass shall meet the requirements of MIL-C-675. The AGU-1A/U and AGU-1B/U indicator cover glasses shall conform to MIL-C-675, in addition to withstanding the environmental requirements specified herein, except they shall be coated with a multilayer of materials that will meet the following reflectance tolerances:

ANGLE OF INCIDENCE	WAVELENGTH MILLIMICRONS	PERCENT REFLECTANCE
0°	450-675	0.6 maximum
0°	425-700	0.5 average
30°	450-625	1.0 maximum
30°	425-700	0.5 average.

3.5.6 Radio noise interference. The indicator shall meet the radio noise interference requirements of MIL-STD-461.

3.5.7 Effect of lead length. When the lead length between the indicator and transmitter is changed from 5 to 500 feet, the indication shall not change more than 1° of arc. The ground lead shall be kept short.

3.5.8 Magnetic effect. The compass deflection shall not exceed 3° of arc when the indicator is positioned 5-1/2 inches from the compass and the horizontal magnetic field intensity at the indicator is 0.17 to 0.19 oersted.

3.5.9 Unit torque gradient. The unit torque gradient shall be a minimum of 2,000 milligram-millimeters per angular degree of rotation.

3.5.10 Explosive decompression. The indicator shall meet the performance requirements specified herein immediately after being subjected to condition I of the explosive decompression test specified in 4.6.23. The indicator shall not deform nor disintegrate in a manner that would cause injury to a crew member or otherwise jepordize aircraft safety when subjected to condition II of 4.6.23.

3.6 Part numbering of interchangeable parts. All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable. The item identification and part number requirements of MIL-STD-100 shall govern the manufacturer's part numbers and changes thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:23Z
Check the source to verify that this is the current version before use.

3.7 Numberals and letters. Numberals and letters shall conform to MS33558.

3.8 Finishes and protective coatings

3.8.1 Aluminum alloy parts. Alluminum alloy parts shall be coated with an anodic film conforming to MIL-A-8625 except that small holes, straight threads, and case inserts need not be anodized. If such parts are in a hermetically sealed enclosure, they need not be anodized.

3.8.1.1 Aluminum alloy parts that do not anodize satisfactorily shall be coated with a chemical film in accordance with MIL-C-5541.

3.8.1.2 When abrasion resistance is a factor, chemical films in accordance with MIL-C-5541 shall not be used in lieu of anodizing.

3.9 Weight. The weight of the indicator shall not exceed 0.50 pound.

3.10 Screw threads. Unless otherwise specified, the threads of all maching screws shall conform to MIL-S-7742.

3.11 Identification of product. Equipment, assemblies, and parts shall be marked for identification in accordance with MIL-STD-130.

3.11.1 Nameplate. A nameplate shall be permanently attached to the rear of the case. Where applicable, the information marked thereon shall conform to MIL-STD-130. The nameplate shall not be glued or cemented to the case nor shall metal decals be used.

3.12 Workmanship. The indicator shall be constructed and finished in a thoroughly workmanlike manner. Particular attention shall be given to neatness and throughness of soldering, wiring, impregnation of coils, welding, riveting, brazing, plating, painting, machine screw assemblies, and freedom of parts from burrs and sharp edges. Gears shall be of high quality and shall provide a minimum of backlash necessary for smooth operation. Where necessary, antibacklash techniques shall be used.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of tests. The inspection and testing of indicators shall be classified as follows:

a. Qualification test

b. Acceptance tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:23Z
Check the source to verify that this is the current version before use.

4.3 Test conditions

4.3.1 Standard atmospheric conditions. Wherever the pressure and temperature existing at the time of the test are not specified definitely, it is understood that the test is to be made at atmospheric pressure (approximately 29.92 inches Hg) and at room temperature (approximately 25°C). When tests are made with atmospheric pressure or room temperature differing materially from the above values, proper allowance shall be made for the difference from the specified condition.

4.3.2 Attitude. Unless otherwise specified, the indicator shall be tested in the normal operating position with the plane of the dial vertical.

4.3.3 Electrical power. Unless otherwise specified the indicator shall be tested with 26 ±1V, single-phase, 400 ±5-cps a-c power and with 4.5 ±0.5V ac or dc applied to the lighting circuit.

4.3.4 Tapping. Unless otherwise specified, the indicator shall be lightly tapped or vibrated before each reading.

4.3.5 Integral lighting. The integral lighting tests shall be conducted in accordance with MIL-L-25467 and MIL-L-27160 in the sequence specified.

4.4 Qualification testing

4.4.1 Test samples. The test samples shall consist of 10 indicators representative of the production equipment. The samples shall be identified with the manufacturer's part number and such other information as required by the qualifying activity. Seven of the samples shall be subjected to the reliability test only and the other three shall be subjected to all the tests except reliability.

4.4.2 Test report. The contractor shall prepare a test report in accordance with MIL-STD-831 (see 6.3.1).

4.4.3 Qualification tests. The qualification tests shall consist of all the tests specified under 4.6.

4.4.3.1 Nonstandard parts data approval. When nonstandard electronic parts are used in the construction of the indicator, nonstandard parts data approval shall be a prerequisite to qualification approval.

4.5 Acceptance tests. Acceptance tests shall consist of:

a. Individual tests

b. Sampling tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:23Z
Check the source to verify that this is the current version before use.

4.5.1 Individual tests. Each indicator shall be subjected to the following tests as described under 4.6:

a. Examination of product

b. Individual tests of MIL-L-25467 or MIL-L-27160, as applicable

c. Dielectric strength

d. Electrical zero

e. Scale error and friction

f. Position error

g. Sealing.

4.5.2 Sampling tests

4.5.2.1 Sampling plan A. One indicator shall be selected at random from each 100 or less produced on the contract or order and subjected to the following tests as described under 4.6:

a. Individual tests

b. Sampling plan A tests of MIL-L-25467 or MIL-L-27160, as applicable

c. Vibration

d. Low temperature

e. High temperature

f. Fogging.

4.5.2.2 Sampling plan B. Unless otherwise specified, three indicators shall be selected at random from the first 15 on the contract or order and subjected to the following tests as specified in 4.6:

a. Sampling plan A tests

b. Sampling plan B tests of MIL-L-25467 or MIL-L-27160, as applicable

c. Secondary voltage

d. Magnetic effect

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:23Z
Check the source to verify that this is the current version before use.

e. Effect of lead length

f. Temperature-altitude

g. Low temperature exposure

h. High temperature exposure

i. Thermal shock

j. Salt fog

k. Radio noise interference

l. Unit torque gradent

m. Reflectance

n. Explosive decompression.

4.5.2.3 Rejection and retest. When one item selected from a production run fails to meet the specification, no items still on hand or later produced shall be accepted until the extent and cause of the failure have been determined and appropriately corrected.

4.5.2.4 Individual tests may continue. For operational reasons, individual tests may be continued pending the investigation of a sampling test failure. But final acceptance of items on hand or later produced shall not be made until it is determined that items meet all the requirements of the specification.

4.5.3 Defects in items already accepted. The investigation of a test failure could indicate that defects may exist in items already accepted. If so, the contractor shall fully advise the procuring activity of all defects likely to be found and methods of correcting them.

4.6 Test methods

4.6.1 Examination of product. The indicator shall be inspected to determine compliance with the requirements specified herein with respect to materials, workmanship, and markings. Prior to assembly, dials, pointers, and synchros shall be inspected as to markings, dimensions, and finishes.

4.6.2 Dielectric strength. A potential of 200V at a commerical frequency shall be applied between any pin of the electrical receptacle and the case of the indicator for a minimum period of 5 seconds. There shall be no breakdown of the insulation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:23Z
Check the source to verify that this is the current version before use.

4.6.3 Electrical zero. The electrical zero test and the verification of leads shall be accomplished on the completed indicator with the case removed. A voltage of 26 ±1V single phase, shall be applied to the rotor of the synchro with leads designated R_1 and R_2. R_2 shall be connected to the ground or low potential side of the power input. With a lead designated S_2 connected to R_2, the following conditions shall exist at electrical zero:

a. The voltage between the remaining stator terminals designated S_1 and S_3 shall be a minimum

b. The voltage between R_1 and S_3 shall be near the low null and shall reach the low null when the rotor is rotated clockwise approximately 30° from electrical zero.

4.6.4 Scale error and friction. The indicator shall be tested for scale error at ambient temperature at the test points specified in table II. The indicator shall be lightly tapped or vibrated before each reading to remove normal instrument friction. The scale errors shall not exceed the tolerances specified in table II. The friction error test may be conducted in conjunction with the scale error test. The difference between the readings before and after the indicator is tapped or vibrated shall constitute friction error. Friction error shall not exceed the tolerances specified in table III. This procedure shall be accomplished both up-scale and down-scale at the test points specified.

4.6.5 Position error. The indicator pointer shall be positioned at the electrical zero reference mark with power applied. The change in pointer position when the indicator is held in any position shall not exceed the value specified in table III.

4.6.6 Sealing. The indicator case shall be tested for leaks by means of a mass-spectrometer-type helium leak detector. The detected leak rate shall not exceed 0.1 micron cubic foot per hour at a pressure differential of 1 atmosphere.

4.6.7 Vibration. The indicator shall be subjected to a vibration test in accordance with MIL-STD-810, method 514, equipment category (a), procedure I, curve B. A synchro signal shall be maintained on the stators of the indicator synchro to provide an indication of 2,000 psi. Pointer oscillation shall not exceed 200 psi double amplitude. Upon completion of this test, the indicator shall be subjected to the scale error test at room temperature. The scale errors shall not exceed the tolerances specified in table II.

4.6.8 Low temperature. The indicator shall be subjected to a temperature of -55° ±2°C for a period of 4 hours. While at this temperature, it shall be checked for scale error and friction. The tolerances shall not exceed those specified in table III. In every case, the indicator shall not require more than 3 seconds to come within the tolerance specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:23Z
Check the source to verify that this is the current version before use.

4.6.9 High temperature. The indicator shall be subjected to a temperature of 71° ±2°C for a period of 4 hours. While at this temperature, it shall be checked for scale errors. The scale error and friction tolerances shall not exceed the values specifed in table III. The response time shall not exceed 3 seconds.

4.6.10 Fogging. The indicator shall be placed in a controlled ambient temperature of 85° ±5°C for a minimum period of 2 hours. Within 10 seconds after removal from the oven, the indiator shall be immersed to a depth of 1/4 inch in an ice water bath maintained at 0° to 7°C. After 3 minutes, the indicator shall be removed from the fluid bath and quickly wiped dry (compressed air shall not be used). The cover glass and dial shall immediately be inspected and any evidence of fogging or damage shall be cause for rejection.

4.6.11 Secondary voltage. The maximum open-circuit voltage shall be measured between any two secondary leads and shall be 11.8V ±3 percent. The variation between the three maximum secondary voltages on the indicator synchro as measured between any two stator leads shall not exceed 0.2V.

4.6.12 Magnetic effect. The indicator, first, not operating and second, operating on rated voltage, shall be rotated in a vertical plane about a short bar magnet compass with the nearest part of the indicator 5-1/2 inches from and magnetically east or west of the center of the compass. Starting directly under the compass, the indicator shall be held in positions 0°, 45°, 90°, 135°, 180°, 225°, 270°, and 315° from the initial position. At each of these positions, the indicator shall be rotated on its own horizontal axis until it is in its normal upright position. The horizontal magnetic field intensity shall be 0.17 to 0.19 oersted. Deflection of the compass at any of the specified positions shall not exceed 3°.

4.6.13 Effect of lead length. The indicator shall not change more than 1° of arc when the lead length between the indicator and transmitter is changed from 5 to 500 feet of the No. 20 AWG gage wire. Equivalent resistances may be substituted for the added wire length. The ground lead shall be kept short.

4.6.14 Temperature-altitude. The temperature-altitude test shall be conducted in accordance with MIL-STD-810, method 504, procedure I (except the temperature shall be -55°C) with a chamber pressure equivalent to an altitude of 100,000 feet. The rate of pressure change shall not exceed an average of 3 psi per second while under these conditions. At the end of a 1-hour period, the scale error and friction test shall be conducted. The errors shall not exceed the tolerances specified in table III. This test may be conducted concurrently with the low temperaure exposure test.

4.6.15 Low temperature exposure. The indicator shall be subjected to a temperature of -65° ±2°C for a period of 48 hours. While at this temperature, the indicator shall be operated to assure that the pointer moves over the entire scale range without exhibiting sticky or erratic characteristics. The temperature shall then be raised to -55° ±2°C and held for a period of 24 hours. While at this temperature, the indicator shall be subjected to the scale error and friction test, except that in every case, the

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:23Z
Check the source to verify that this is the current version before use.

indicator shall not require more than 4 seconds to come within the tolerances of table III. All parts of the indicator shall then be maintained at room temperature for a period of not less than 4 hours and the indicator again subjected to the scale error and friction test. The scale errors and friction shall not exceed the tolerances specified in tables II and III. There shall be no damage nor deterioration that will affect subsequent operation.

4.6.16 High temperature exposure. The indicator shall be subjected to a temperature of 71°C for a period of 24 hours and then tested at this temperature for scale errors as specified in 4.6.4. The scale error and friction shall not exceed the tolerances specified in table III. All parts of the indicator shall then be maintained at room temperature for a period of not less than 4 hours and the indicator again subjected to the scale error and friction test. The scale errors observed shall not exceed the tolerances specified in table II. There shall be no damage or deterioration that might affect subsequent operation.

4.6.17 Thermal shock. The indicator shall be subjected to eight cycles of immersion in water at a temperature of 85° ±2°C and then in water at a temperature of 5° ±2°C without evidence of moisture penetration or damage to the coating or the case. The length of time for each immersion shall be 30 minutes, with not more than 5 seconds between immersions. After eight continuous cycles have been completed, the indicator shall be subjected to the test specified in 4.6.6.

4.6.18 Salt fog. The indicator shall be subjected to a salt fog test for a period of 48 hours in accordance with MIL-STD-810, method 509, procedure I. There shall be no evidence of external corrosion or deterioration that might affect subsequent operation. The scale errors after this test shall not exceed the tolerances specified for room temperature scale error.

4.6.19 Radio noise interference. The indicator shall be subjected to a radio noise interference test in accordance with MIL-STD-461 except that the frequency range for radiated noise shall be within 0.15 to 150 megacycles. During this test, the synchro shall be operated at 30 ±5 rpm.

4.6.20 Unit torque gradient. The indicator shall be connected to the master transmitter synchro and the master transmitter locked in the electrical zero position. The synchro rotors shall then be energized with rated voltage and frequency ±1 percent. Weights shall be applied to a torque pulley which is positioned on the rotor shaft to rotate the shaft in a ccw direction through an angle of 5° of arc. The torque tending to return the shaft to its original position shall be computed and shall be no less than 2,000 milligram-millimeters per degree of displacement.

4.6.21 Lighting. The AGU-1/U and AGU-1A/U indicators shall be subjected to lighting tests in accordance with the sampling plan B tests of MIL-L-25467 and the AGU-1B/U indicator shall be subjected to lighting tests in accordance with the sampling plan B tests of MIL-L-27160.

Source: https://assist.dla.mil -- Downloaded: 20260-20T07:23Z
Check the source to verify that this is the current version before use.

compensate for the precise length of extension wire.

4.6.22 Reflectance (AGU-1A/U and AGU-1B/U indicators). The reflectance of all glass surfaces shall be measured and the tolerances shall not exceed those specified in 3.5.5.

4.6.23 Explosive decompression. The indicator shall be subjected to an explosive decompression test during which the surrounding air pressure shall be varied with time in accordance with conditions I and II of figure 3. The indicator shall then meet the scale error tolerances specified in table II.

4.6.24 Reliability. Seven indicators shall be tested for reliability. Acceptance permitting production and total test time shall be in accordance with MIL-STD-781, test plan I. Recording, data handling, and reporting shall also be in accordance with MIL-STD-781.

4.6.24.1 Test. The test equipment and fixtures shall include provisions for vibration and temperature cycling at the periodic intervals specified herein. During this test, input signals shall be applied to the indicator at a rate of 2 to 3 cycles (minimum and maximum) per minute from 0 to 85 percent of full scale and return. The test shall begin when rated power is applied. After complation of 4 hours of operation with rated power on, which shall include at least 480 cycles of operation, the power shall be turned off and shall remain off for a period of 10 minutes. For at least 10 minutes out of every hour of ON time, the indicator shall be vibrated in accordance with test level J of MIL-STD-781. The temperature cycles shall be conducted in the following sequence: 4 hours at -20°C, 14 minutes for temperature change to +50°C at a minimum rate of 5°C per minute; 4 hours at +50°C, 14 minutes for temperature change to -20°C, and 4 hours at -20°C. In case of malfunction, the malfunction shall be recorded and the test interrupted while repairs are made. Upon completion of each 250 hours of cycling, the indicator shall be checked for scale error. The scale error reading shall not exceed 150 percent of the room temperature tolerance in table II. No recalibration shall be performed on the units during this test. The test may be interrupted for weekend shutdown. The contractor shall prepare a report in accordance with MIL-STD-781 which shall contain test procedures, details of any malfunctions and corrective actions taken.

4.6.25 Longevity. At the completion of the reliability test, testing of three of the indicators shall be continued for a total of 3,000 hours each. The test time accumulated during the reliability test shall be applied to this test. The accept-reject criteria is not applicable.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A. Unless otherwise specified in the contract or order, indicators shall be individually preserved and packaged in accordance with MIL-P-116, method III, and placed in a snug-fitting unit container conforming to PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:23Z
Check the source to verify that this is the current version before use.

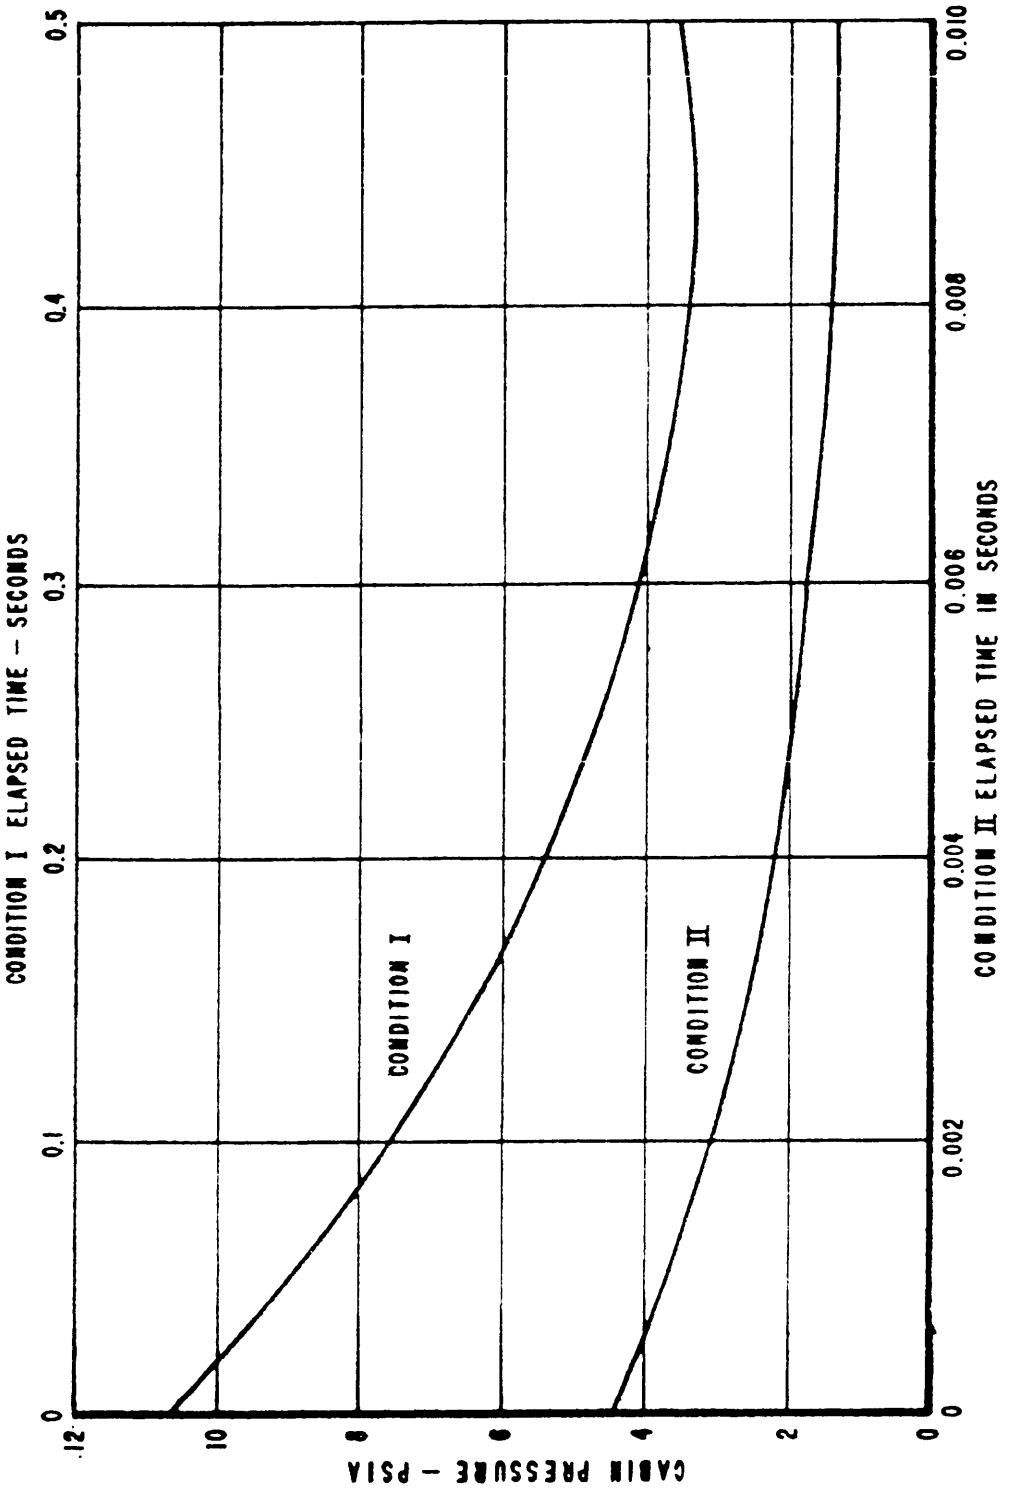


FIGURE 3. Cabin Pressure Decay During Explosive Decompression (Conditions I & II)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:23Z
Check the source to verify that this is the current version before use.

5.1.2 Level C. Indicators shall be individually preserved and packaged in a manner that will afford adequate protection against corrosion, deterioration, physical damage during shipment from the supply source to the first receiving activity. This level may conform to the supplier's standard practice provided the latter meets the requirements of this level.

5.2 Packing. Packing shall be level A, B or C, as specified (see 6.2).

5.2.1 Level A. Indicators preserved and packaged as specified in 5.1.1 shall be packed in weather-resistant shipping containers conforming to PPP-B-636. Shipments that exceed the weight limitations of this specification shall be packed in overseas-type containers conforming to PPP-B-601. The gross weight of each PPP-B-601 container shall not exceed 200 pounds. Where practicable, exterior shipping containers shall be of uniform shape and size and of minimum cube and tare. Closure and strapping shall be in accordance with the appendix of PPP-B-636 or PPP-B-601, as applicable. Waterproofing shall be in accordance with MIL-STD-1186.

5.2.2 Level B. Indicators preserved and packaged as specified in 5.1.1 shall be packed in domestic shipping containers conforming to PPP-B-636. Where practicable, exterior shipping containers shall be of uniform shape and size and of minimum cube and tare. The gross weight of each shipping container shall not exceed the weight limitations of the specification. Closure and strapping shall be in accordance with the appendix of PPP-B-636.

5.2.3 Level C. Packages that require overpacking for acceptance by the carrier shall be placed in exterior-type shipping containers in a manner that will insure safe transportation at the lowest rate to the point of delivery. Containers shall comply with Uniform Freight Classification Rules or regulations of other carriers as applicable to the mode of transportation.

5.3 Physical protection. Cushioning, blocking, bracing, and waterproofing shall be in accordance with MIL-STD-1186. Waterproofing requirements for cushioning materials and containers shall be waived for domestic shipments. The drop tests of MIL-STD-1186 shall be waived when the item is preserved, packaged, and packed for immediate use or when the drop tests of MIL-P-116 are applicable.

5.4 Marking. In addition to any other marking required by the order or contract, interior and exterior containers shall be marked in accordance with MIL-STD-129. The nomenclature shall be as follows, as applicable:

5.5 Marking of shipments. Interior packages and exterior shipping containers shall be marked for shipment in accordance with MIL-STD-129. The nomenclature shall be as follows, as applicable:

Indicator, Pressure AGU-1A/U, Hydraulic, 0-4000 psi, Integrally Lighted
or
Indicator, Pressure AGU-1/U, Hydraulic, 0-4000 psi, Integrally Lighted
or
Indicator, Pressure AGU-1B/U, Hydraulic, 0-4000 psi, Integrally Lighted

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:23Z
Check the source to verify that this is the current version before use.

5.5.1 Reinspection date. Reinspection date markings shall be in accordance with the instructions of the procuring activity.

6. NOTES

6.1 Intended use. The indicators covered by this specification are intended for use in conjunction with the Type MJ-1 pressure transmitter in indicating remotely the hydraulic pressure in aircraft systems which require integrally lighted instruments

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification

b. Type of indicator required (see 1.2)

c. When sampling plan B tests will not be conducted

d. Levels of packaging and packing required and reinspection date markings (see section 5).

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time set for opening of bids, qualified for inclusion in the applicable Qualified Products List whether or not such products have actually been so listed by that date. The attention of suppliers is called to this requirement, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. The activity responsible for the Qualified Products List is the Systems Engineering Group, Attn: SEFIP, Wright-Patterson Air Force Base, Ohio and information pertaining to qualification of products may be obtained from that activity.

6.3.1 Test report. The contractor will submit to the qualifying activity three copies of the test report specified in 4.4.2.

6.4 Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Air Force - 11

Preparing activity:
Air Force - 11

Review activity:
Air Force - 82

Project No. 6685-F250

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:23Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity (as indicated on reverse hereof).

SPECIFICATION

ORGANIZATION (Of submitter) | CITY AND STATE

CONTRACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT
$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS (Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)

SUBMITTED BY (Printed or typed name and activity) | DATE

DD, FORM 1426 APR 63

REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE

S-0378

Source: https://assist.dla.mil -- Downloaded: 20260-20T07:23Z
Check the source to verify that this is the current version before use.

FOLD

SEG (SEPS)
WRIGHT-PATTERSON AFB, OHIO

POSTAGE AND FEES PAID

UNITED STATES AIR FORCE
OFFICIAL BUSINESS

Commander
Systems Engineering Group
ATTN: SEPS
Wright-Patterson AFB, Ohio

FOLD

GPO 303-222/Z 645

PLATE NO. 17,413 (BACK)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:23Z
Check the source to verify that this is the current version before use.