MIL-I-25861D (USAF)
AMENDMENT 3
24 JULY 1981
SUPERSEDING
AMENDMENT 2
21 April 1971

MILITARY SPECIFICATION

INDICATOR, PRESSURE, HYDRAULIC, 0-4000 PSI
INTEGRALLY LIGHTED

This amendment forms a part of Military Specification MIL-I-25861D (USAF) dated 30 November 1967.

Add to Bottom of Page 1:

"Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: HQ AFLC CASO/LODS, Federal Center, Battle Creek, MI. 49016 by using the self-addressed Standardization Document Proposal (DD Form 1426) appearing at the end of this document or by letter."

PAGE 1

* 2.1 SPECIFICATIONS:

Military

Delete "MIL-P-116, Preservation, Methods of" and substitute "MIL-P-116, Preservation-Packaging, Methods of."

PAGE 2

* 2.1 STANDARDS:

Military

Delete "MS33586 Metals, Definition of Dissimilar" and substitute "MIL-STD-889 Dissimilar Metals"

* Delete parenthetical source paragraph in its entirety and substitute the following:

"(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)"

PAGE 3

* 3.3.4, line 3: Delete "MS33586" and substitute "MIL-STD-889."

* Add the following paragraph:

"3.3.7 Reclaimed materials: The use of reclaimed materials shall be encouraged to the maximum extent possible."

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:23Z
Check the source to verify that this is the current version before use.

PAGE 5

* Figure 1: Delete and substitute Figure 1 shown on Page 4 of this amendment.

PAGE 9

* Add the following new paragraph:

"3.5.11 Damping. The indicator shall be so damped that when excited from 0 to 2,000 psi with no more than two overshoots, the time period will not exceed 2.0 seconds."

PAGE 10

* 3.7: Delete "numberals" and substitute "numerals."

Delete 4.1 and substitute the following:

"4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements."

PAGE 12

4.5.2.1: Add subparagraph g.

"g. Damping."

PAGE 13

4.5.2.2.1: Delete "gradent" and substitute "gradient."

PAGE 17

Add the following paragraph:

"4.6.26 Damping. The indicator shall be connected to a transmitter, to operate as a system, and shall be positioned at approximately 0 psi pressure with excitation power off. Excitation power or actual pressure shall be applied to the system to change the transmitter position from 0 to 2,000 psi within a period not exceeding 0.5 second. The time required for the indicator to indicate 2,000 ±100 psi shall not exceed 2.0 seconds. The pointer shall move smoothly, shall not oscillate, and shall not overshoot more than two times."

5. Delete title "Preparation for Delivery" and substitute "PACKAGING."

Source: https://assist.dla.mil - Downloaded: 2026-10-20T07:23Z
Check the source to verify that this is the current version before use.

6.3 Delete and substitute the following:

* "6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are at the time set for opening of bids, qualified for inclusion in the applicable Qualified Products List whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. The activity responsible for the Qualified Products List is San Antonio ALC/MMIREB, Kelly AFB, Texas 78241, and information pertaining to qualification of products may be obtained from that activity."

* 6.4 Delete and substitute the following:

"6.4 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue."


Custodian:
Air Force - 99

Review Activity:
DSC - GS

Preparing Activity:
Air Force - 99

Project No. 6685-F646

Source: https://assist.dla.mil -- Downloaded: 20260-20T07:23Z
Check the source to verify that this is the currentversion before use.

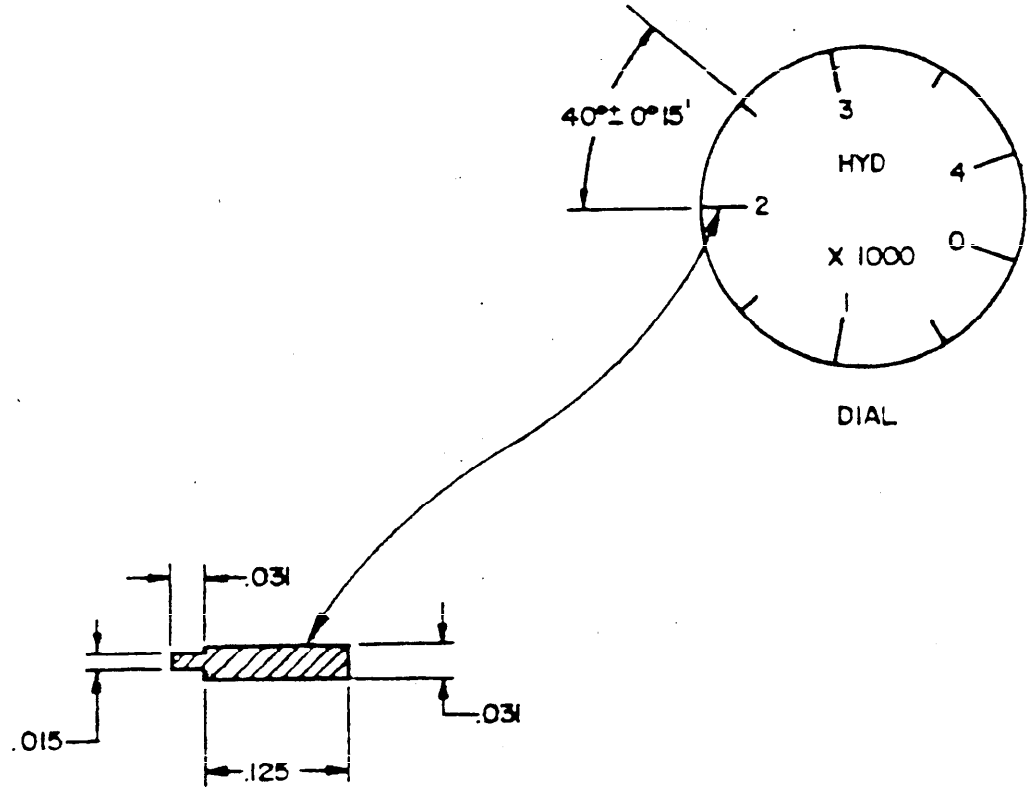

DIMENSIONS IN INCHES
UNLESS OTHERWISE SPECIFIED.
TOLERANCES: FRACTIONS ± 1/64
DECIMALS ± 0.010

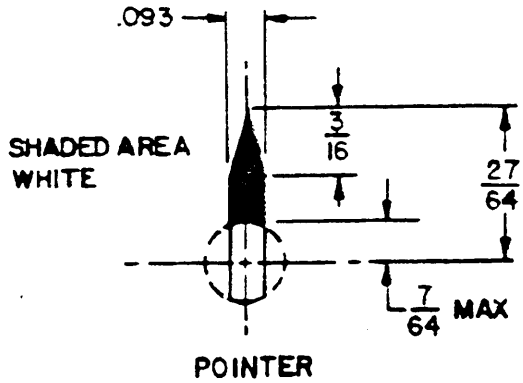


FIGURE 1. Dial and Pointer

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T07:23Z
Check the source to verify that this is the current version before use.