

NOTICE: When government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all subsidiary standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new designs, not later than 6 months after the latest date of approval shown.

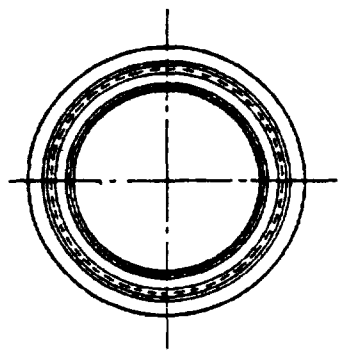

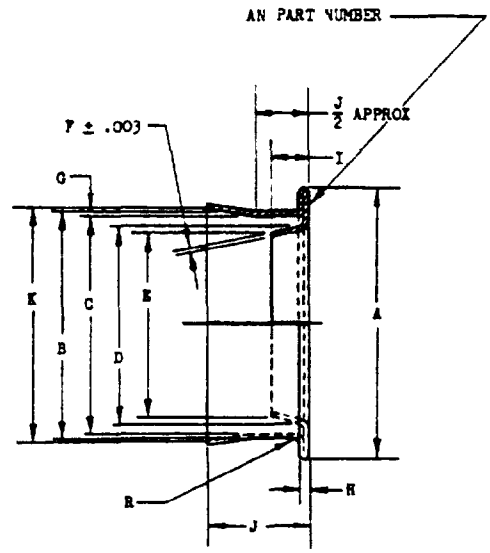

AN PART NO.	CONDUIT SIZE	A DIA	B DIA	C DIA	D DIA	E DIA	F	G	(a) H	I	J	K +.015 −.000 DIA	R MAX RAD
AN3051-3	3/16	.566	.385	.345	.188	1/8	.017	.020	.040	7/64	7/16	.398	.020
AN3051-4	1/4	.682	.447	.407	.250	3/16	.017	020	.040	7/64	7/16	.460	.030
AN3051-6	3/8	.807	.572	.532	.375	5/16	.017	.020	.040	1/8	7/16	.585	030
AN3051-8	1/2	.932	.697	.657	500	7.16	.017	020	.040	5/32	7/16	.710	.030
AN3051-10	5/8	1.105	.822	.782	.625	9/16	.017	.020	.040	5/32	7/16	835	030
AN3051-12	3/4	1.355	982	.942	.750	11/16	.017	.020	.040	5/32	1/2	1.001	.030
AN3051-16	1	1.668	1.267	1.227	1.000	15/16	.017	.020	.060	5/16	5/8	1 300	.030
AN3051-20	1-1/4	1.918	1.522	1.482	1.250	1-3/16	017	020	.060	5/16	5/8	1 555	.030
AN3051-24	1-1/2	2.160	1.777	1.737	1.500	1-7/16	017	.020	.060	5/16	3/4	1.823	.030
AN3051-28	1-3/4	2.410	2.029	1.989	1.750	1-11/16	017	020	.060	5/16	7/8	2.088	.030
AN3051-32	2	2.910	2 282	2.242	2.000	1-15/16	.017	.020	.060	5/16	1	2 353	.030

(a) DIMENSION H FOR SIZES -16 TO -32, INCLUSIVE, OF STAMPED FERRULES TO BE OBTAINED BY A SUITABLE WASHER OF THE SAME MATERIAL AND THICKNESS AS THE FERRULE MATERIAL, THIS WASHER SHALL BE ATTACHED TO THE FERRULE

(5) MATERIAL: ALUMINUM, SPECIFICATION QQ-A-561, TEMPER O OR SPECIFICATION QQ-A-359, TEMPER O

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES FRACTIONS ±1/64, DECIMALS ±.005.

APPROVED 25 Mar 40 REVISED (1) 6 Feb 41 (2) 11 Aug 47 (3) 28 Nov 49 (4) 29 May 52 (5) 8 Oct 53

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN3051
NONE	FERRULE-CONDUIT, FLEXIBLE, ONE STEP	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:18Z
Check the source to verify that this is the current version before use.