NOTICE – When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

NOTE – This drawing was approved by joint action of the Air Force and Navy Department as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than six months after the latest date of approval shown.

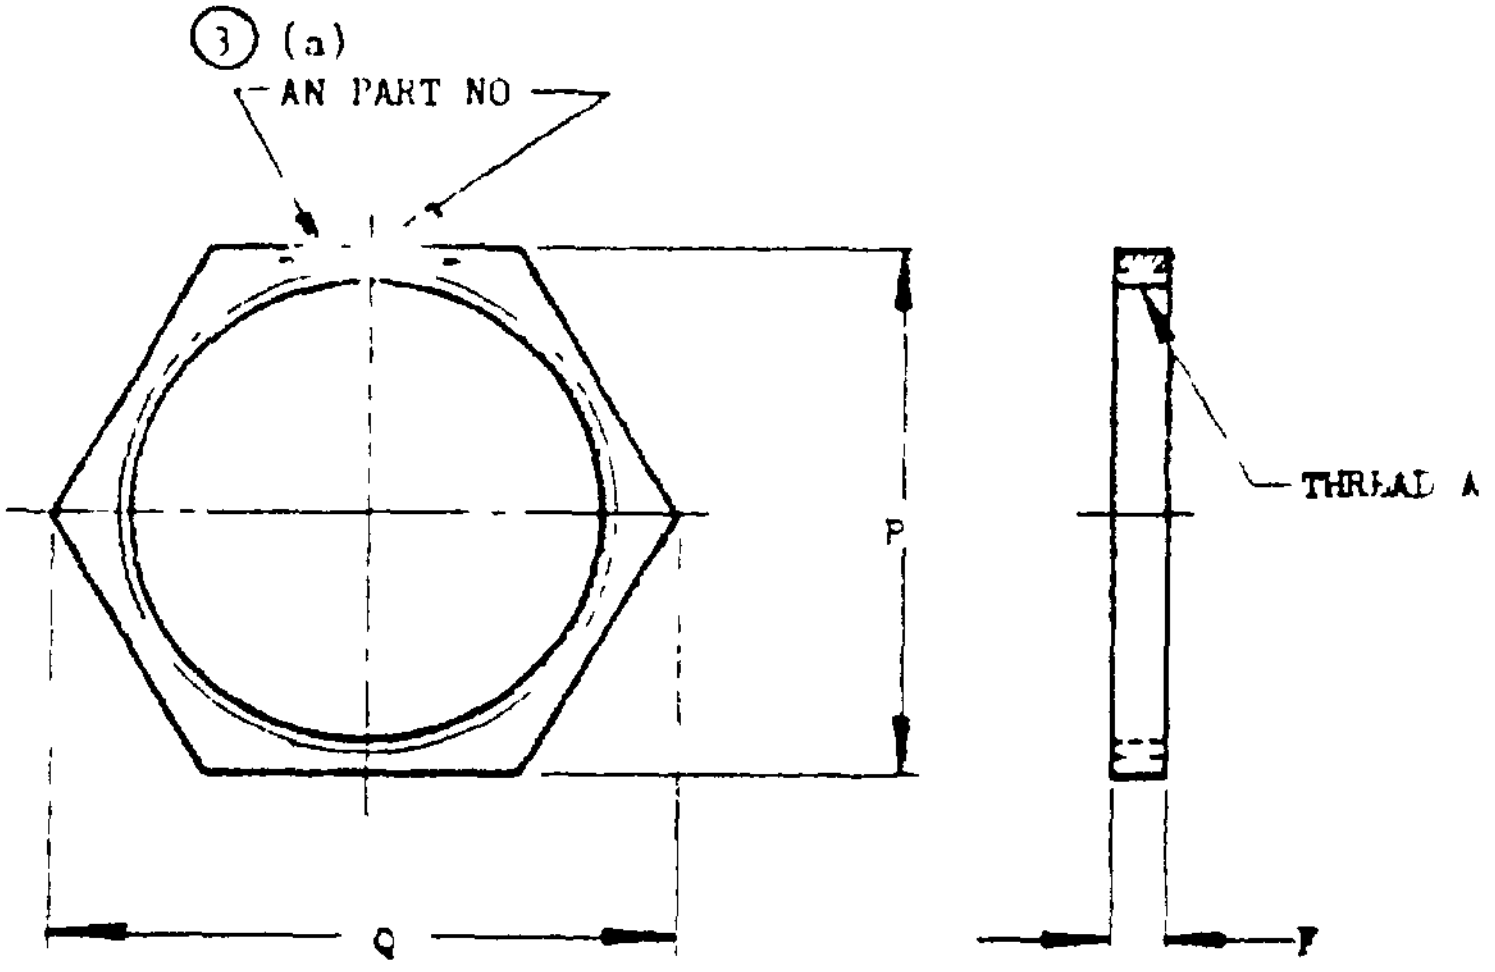

AN PART NO	CONDUIT SIZE	THREAD A	F	P	Q APPROX
AN3066-3	3/16	1/2 -28 UNEF-2B	1/8	11/16	51/64
AN3066-4	1/4	5/8--24 NEF-2B	1/8	13/16	15/16
AN3066-6	3/8	3/4 -20 UNEF-2B	1/8	15/16	1- 3/32
AN3066-8	1/2	7/8 -20 UNEF-2B	3/16	1- 1/16	1-15/64
AN3066-10	5/8	1 -20 UNEF-2B	3/16	1- 1/4	1- 7/16
AN3066-12	3/4	1-3/16-18 NEF-2B	3/16	1- 3/8	1-19/32
AN3066-16	1	1-7/16-18 NEF-2B	3/16	1- 5/8	1- 7/8
AN3066-20	1-1/4	1-3/4 -18 NS -2B	3/16	2	2-5/16
AN3066-24	1-1/2	2 -18 NS -2B	3/16	2-3/16	2-17/32
AN3066-28	1-3/4	2-1/4 -16 UN -2B	1/4	2-7/16	2- 7/8
AN3066-32	2	2-1/2 -16 UN -2B	1/4	2-13/16	3- 1/4
AN3066-40	2-1/2	3 -16 UN -2B	1/4	3- 3/8	3-57/64

THREADS TO BE IN ACCORDANCE WITH SPECIFICATION MIL-S-7742 EXCEPT 1-3/4-18 NS-2B AND 2-18 NS-2B THREADS WHICH SHALL BE IN ACCORDANCE WITH AMERICAN STANDARD ASA B-1

MATERIAL ALUMINUM ALLOY - SPECIFICATION QQ-A-351, CONDITION T, SPECIFICATION QQ-A-355, SPECIFICATION QQ-A-591, OR COMMERICAL GRADE SUITABLE TO THE PROCURING ACTIVITY

FINISH CADMIUM PLATE, SPECIFICATION QQ-P-416, TYPE II, CLASS C

REMOVE ALL BURRS AND SHARP EDGES

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES FRACTIONS ±1/64, DECIMALS ±.005

③ (a) OPTIONAL MARKING ROLL AN PART NUMBER IN THE CENTER OF HEX FLAT

APPROVED 25 Mar 40 REVISED ① 21 Jan 43 ② 15 Apr 53 ③ 21 Sep 56

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN3066
NONE	NUT, PLAIN, HEXAGON, CONDUIT COUPLING	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:19Z
Check the source to verify that this is the current version before use.