NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE—This drawing was approved by joint action of the Air Force and Navy Departments as an Air Force-Navy standard for this product. This drawing supersedes all superseded standard drawings for the same product and shall become effective for the procurement of aeronautical supplies on and after the date of approval shown.

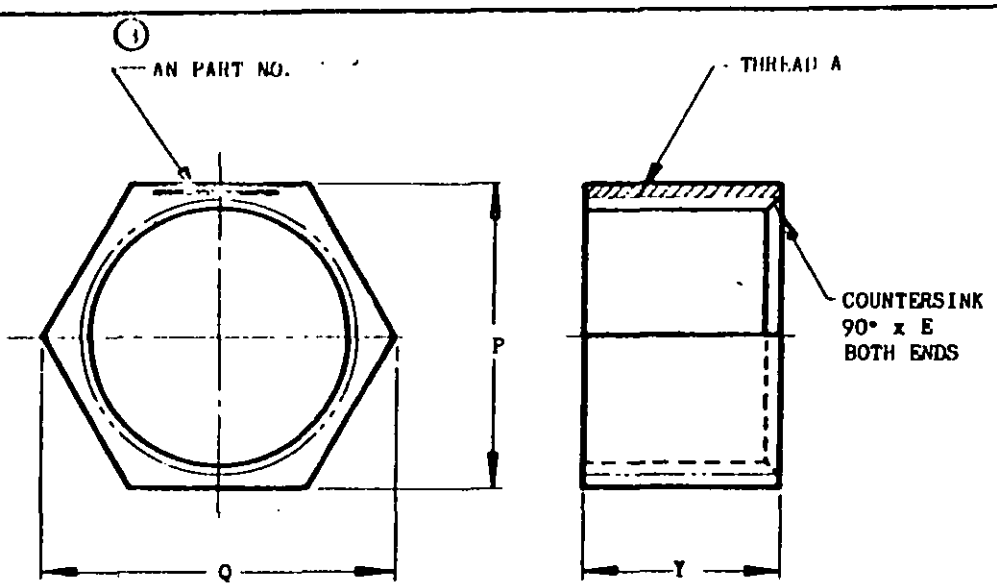

3 AN PART NO.	CONDUIT SIZE	3 THREAD A	P	Q APPROX	Y	E DIA
AN3068-3	3/16	1/2 -28 UNEF-2B	11/16	51/64	1- 1/16	1/2
AN3068-4	1/4	5/8 -24 UNEF-2B	13/16	15/16	1- 1/16	5/8
AN3068-6	3/8	3/4 -20 UNEF-2B	15/16	1- 3/32	1- 1/8	3/4
AN3068-8	1/2	7/8 -20 UNEF-2B	1- 1/16	1-15/64	1- 1/8	7/8
AN3068-10	5/8	1 -20 UNEF-2B	1- 1/4	1- 7/16	1- 1/8	1
AN3068-12	3/4	1-3/16-18 NEF-2B	1- 3/8	1-19/32	1- 1/8	1-3/16
AN3068-16	1	1-7/16-18 NEF-2B	1- 5/8	1- 7/8	1- 1/8	1-7/16
AN3068-20	1-1/4	1-3/4 -18 NS-2B	2.	2- 5/16	1- 1/4	1-3/4
AN3068-24	1-1/2	2 -18 NS-2B	2- 3/16	2-17/32	1- 3/8	2
AN3068-28	1-3/4	2-1/4 -16 UN-2B	2- 7/16	2-13/16	1- 7/16	2-1/4
AN3068-32	2	2-1/2 -16 UN-2B	2-13/16	3- 1/4	1- 9/16	2-1/2
AN3068-40	2-1/2	3 -16 UN-2B	3- 3/8	3-57/64	1-11/16	3

3 THREADS TO BE IN ACCORDANCE WITH SPECIFICATION MIL-S-7742, EXCEPT 1-3/4 -18 NS-2B AND 2 -18 NS-2B THREADS WHICH SHALL BE IN ACCORDANCE WITH AMERICAN STANDARD ASA B-1.

3 MATERIAL: ALUMINUM ALLOY - SPECIFICATION QQ-A-351, CONDITION T ; SPECIFICATION QQ-A-601, CLASS 4, SPECIFICATION QQ-A-591 OR COMMERICAL GRADE SUITABLE TO THE PROCURING ACTIVITY.

3 FINISH: CADMIUN PLATE, SPECIFICATION QQ-P-416, TYPE II, CLASS C.

REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.005.

APPROVED 25 Mar 40 REVISED 1 14 Feb 42 2 21 Jan 43 3 16 Apr 53

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN3068
NONE	3 COUPLING - ELECTRICAL CONDUIT	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:19Z
Check the source to verify that this is the current version before use.