NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all interdepartmental standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

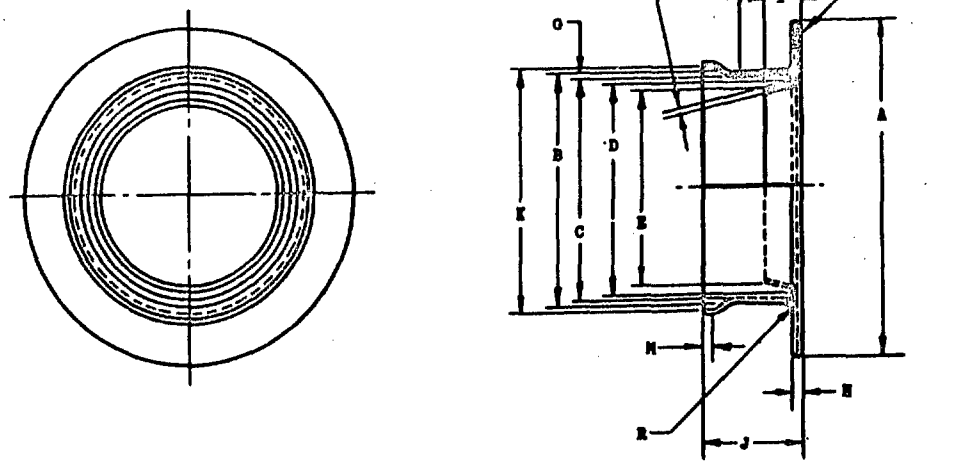

AN PART NO.	(a) CONDUIT SIZE	A DIA	B DIA	C DIA	D DIA	E DIA	F	G	H	I	J	K +.015 -.000 DIA	M APPROX	R MAX RAD
AN3083-16	1	1.918	1.267	1.227	1.000	15/16	.017	.020	.060	5/16	5/8	1.370	1/16	.030
AN3083-20	1-1/4	2.160	1.522	1.482	1.250	1-3/16	.017	.020	.060	5/16	5/8	1.625	1/16	.030
AN3083-24	1-1/2	2.410	1.777	1.737	1.500	1-7/16	.017	.020	.060	5/16	3/4	1.878	1/16	.030
AN3083-28	1-3/4	2.910	2.029	1.989	1.750	1-11/16	.017	.020	.060	5/16	7/8	2.125	1/16	.030

(a) USE FERRULES AN3052 FOR SYNTHETIC COVERED FLEXIBLE CONDUIT SIZES 1/4 TO 3/4 INCLUSIVE.

MATERIAL: ALUMINUM, SPECIFICATION QQ-A-561, CONDITION A .

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS±1/64, DECIMALS ±.005 .

APPROVED 7 Dec 45 REVISED (1) 11 Aug 47 (2) 19 May 52

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN3083
NONE	FERRULE-CONDUIT, FLEXIBLE, TWO STEP, SYNTHETIC COVERED	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:19Z
Check the source to verify that this is the current version before use.