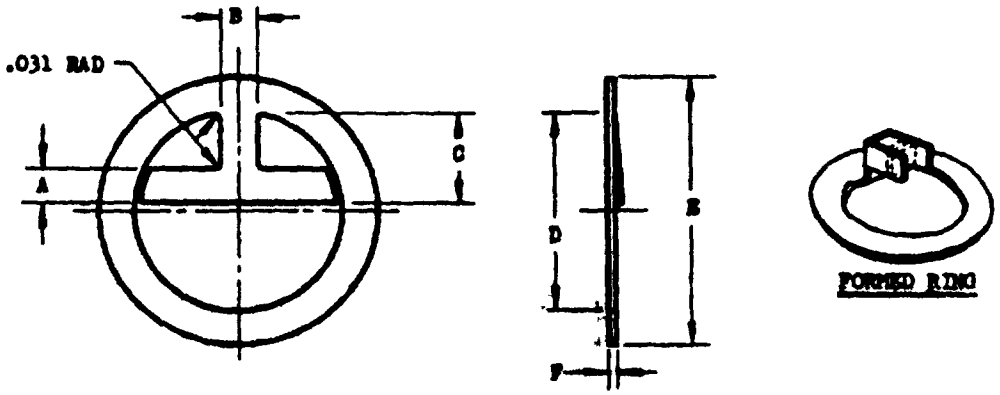


| AN PART NO. | USE WITH AN SHELL SIZE | A | B | C | D ±.005 DIA | E ±.005 DIA | F +.005 -.002 |
|---|---|---|---|---|---|---|---|
| AN3111 -1 | 8S & 10S | .062 | .062 | .156 | .323 | .448 | .020 |
| AN3111 -2 | 10SL, 12 & 12S | .062 | .062 | .188 | .441 | .566 | |
| AN3111 -3 | 14 & 14S | .062 | .062 | .188 | .557 | .682 | |
| AN3111 -4 | 16 & 16S | .094 | .094 | .406 | .620 | .907 | |
| AN3111 -5 | 18 | .125 | .125 | .312 | .682 | .932 | |
| AN3111 -6 | 20 & 22 | .125 | .125 | .500 | .914 | 1.105 | |
| AN3111 -7 | 24 & 28 | .125 | .125 | .438 | 1.105 | 1.355 | |
| AN3111 -8 | 32 | .125 | .125 | .562 | 1.418 | 1.668 | .032 |
| AN3111 -9 | 36 | .125 | .125 | .562 | 1.668 | 1.918 | |
| AN3111-10 | 40 | .125 | .125 | .562 | 1.910 | 2.160 | |
| AN3111-11 | 44 | .125 | .125 | .688 | 2.160 | 2.410 | |
| AN3111-12 | 48 | .125 | .125 | .688 | 2.660 | 2.910 | |
| | | | | | | | |

MATERIAL: SOFT COPPER, SPEC QQ-C-501a-3.

PLATING: TIN

*DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010.

APPROVED 22 Oct 48 REVISED

| PROCUREMENT SPECIFICATION | AIR FORCE-NAVY AERONAUTICAL STANDARD | AN3111 |
|---|---|---|
| NONE | RING - BONDING, ELECTRICAL CONNECTOR | |

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:19Z
Check the source to verify that this is the current version before use.