
MILITARY SPECIFICATION SHEET

SWITCH, ROTARY, SOLENOID OPERATED, (SWITCHBOARD-SELECTOR), DRIVER UNIT

This specification sheet is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the driver unit described herein shall consist of this document and the latest issue of Specification MIL-S-28714.

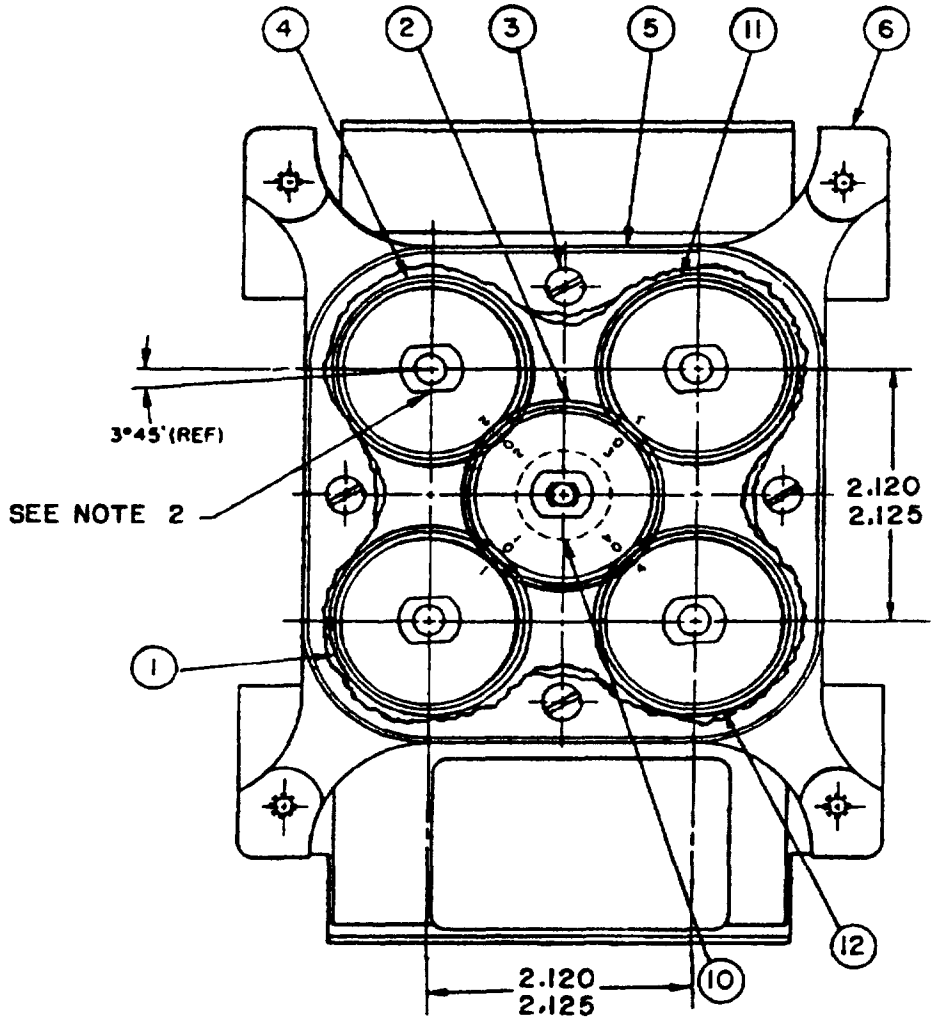

FRONT VIEW

FIGURE 1 Driver unit

(C) denotes changes

FSC 5930

Source: https://assist.dla.mil - Downloaded: 2026-10-20T13:47Z
Check the source to verify that this is the current version before use.


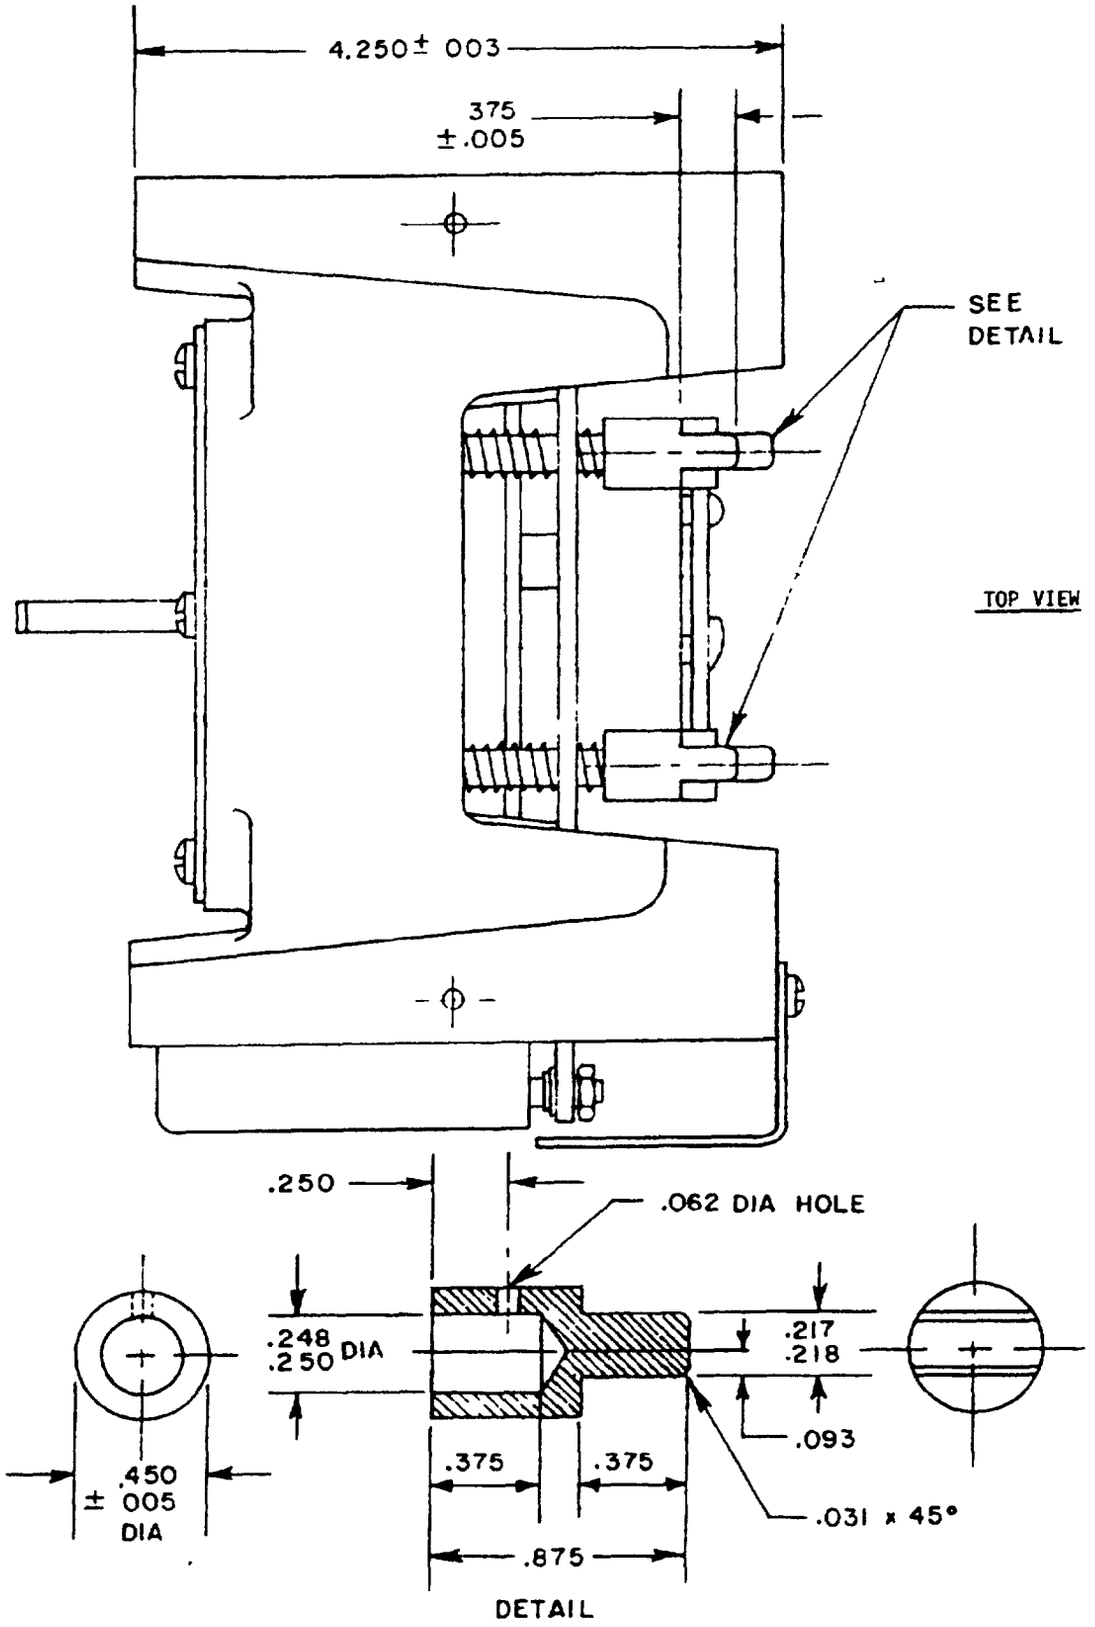


FIGURE 1 Driver unit - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:47Z
Check the source to verify that this is the current version before use.

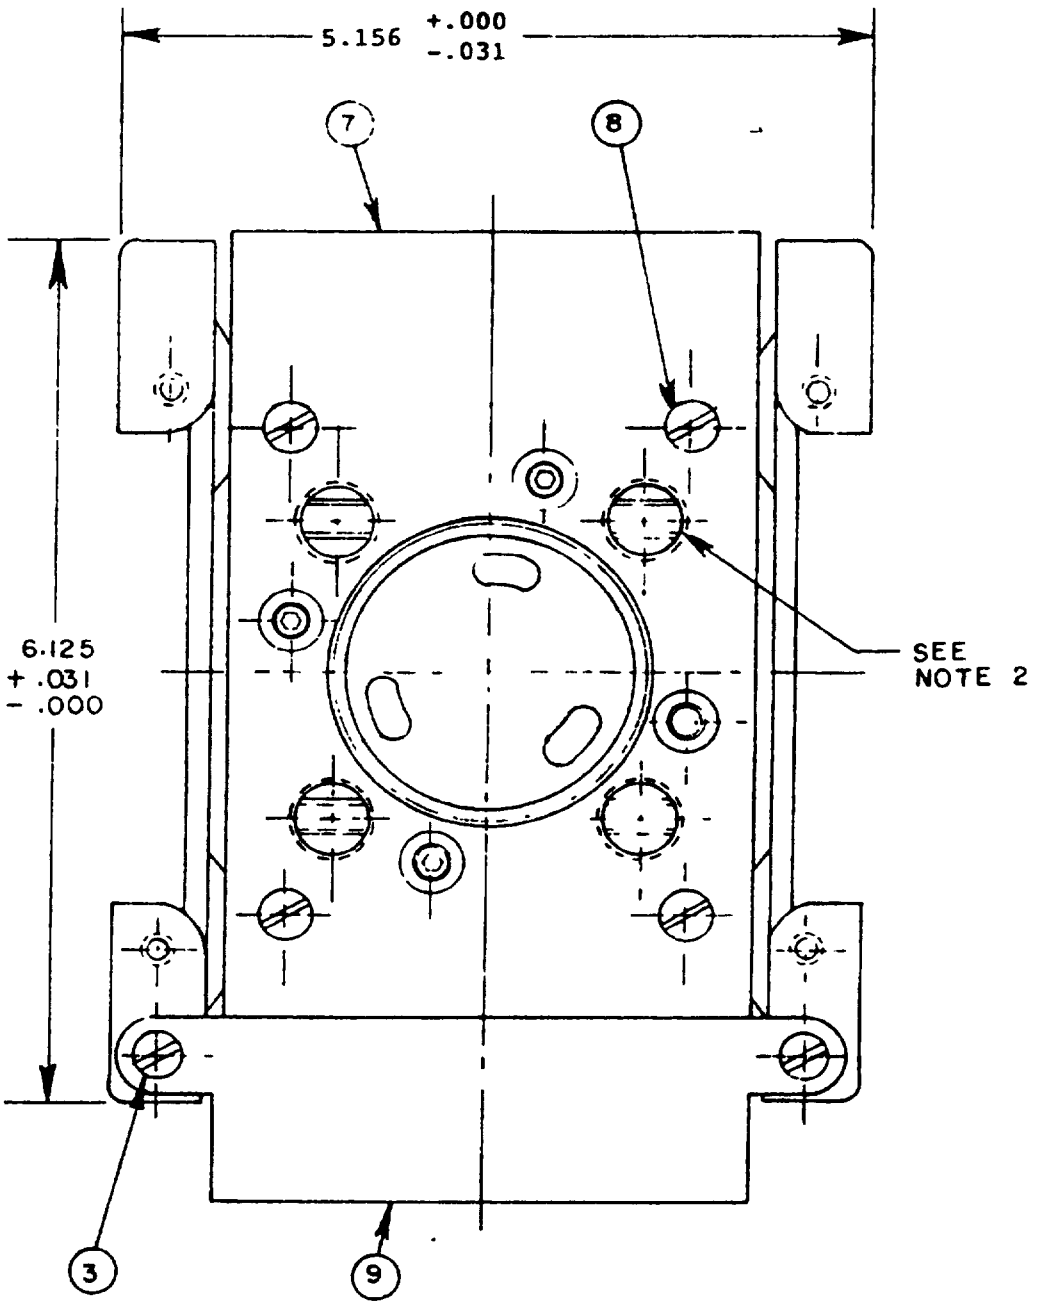

REAR VIEW

FIGURE 1. Driver unit. - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:47Z
Check the source to verify that this is the current version before use.

INCHES	MM
.003	.08
.005	.13
.031	.79
.062	1.57
.093	2.36
.217	5.51
.218	5.54
.248	6.30
.250	6.35
.375	9.52
450	11 43
.875	22.22
2 120	53 85
2 125	53.98
4.250	107 95
5.156	130.96
6.125	155.58


Stock list (driver unit)

Item number	Nomenclature	Number required
12	Shaft assembly	1
11	Shaft assembly	1
10	Bushing (flanged nyliner)	1
9	Shield	1
8	#8-32 Binding head screw	4
7	Mounting plate assembly	1
6	Housing	1
5	Cover plate	1
4	Shaft assembly	1
3	#6-32 Binding head screw	6
2	Gear and hub assembly	1
1	Shaft assembly	1

NOTES:
1. Dimensions are in inches, with tolerances as noted.
2. In front view, the flats of the 4 outer Double-D's are 3°45' off horizontal centerline. In rear view, the same flats are shown as being horizontal.
3. Configuration is optional provided it falls within the envelope size specified
4. Item 7 (mounting plate assembly) is detailed in figure ?.
5. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm

FIGURE 1. Driver unit. - Continued


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:47Z
Check the source to verify that this is the current version before use.

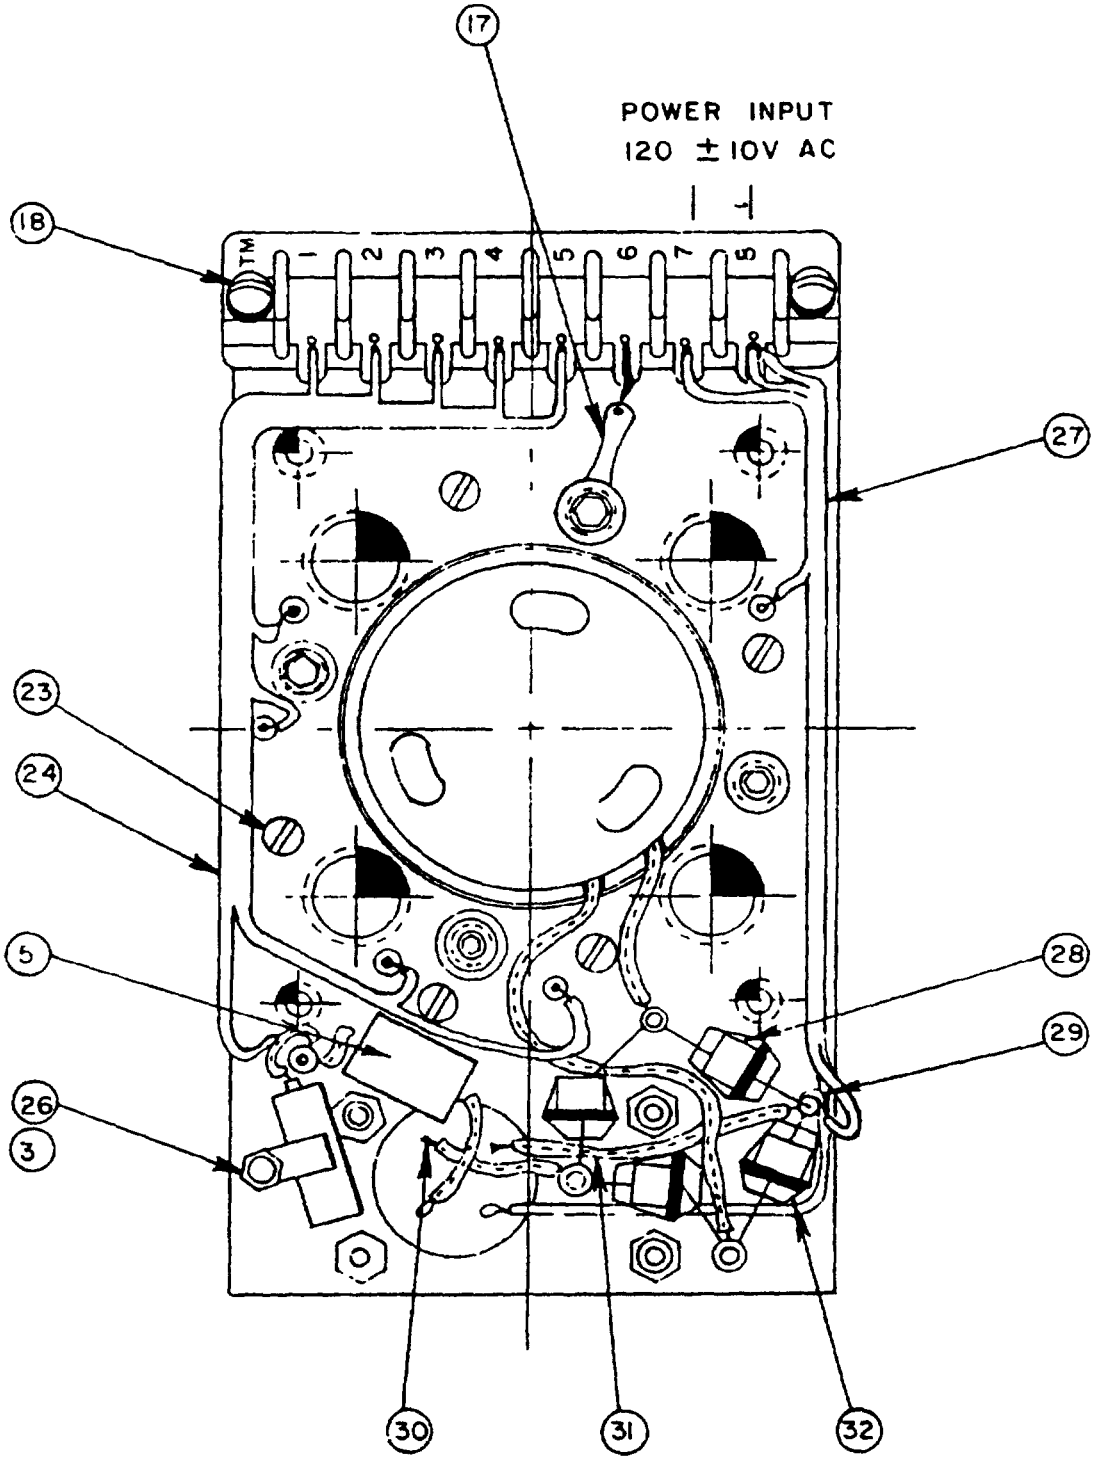

BOTTOM VIEW

FIGURE 2. Mounting plate assembly


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:47Z
Check the source to verify that this is the current version before use.

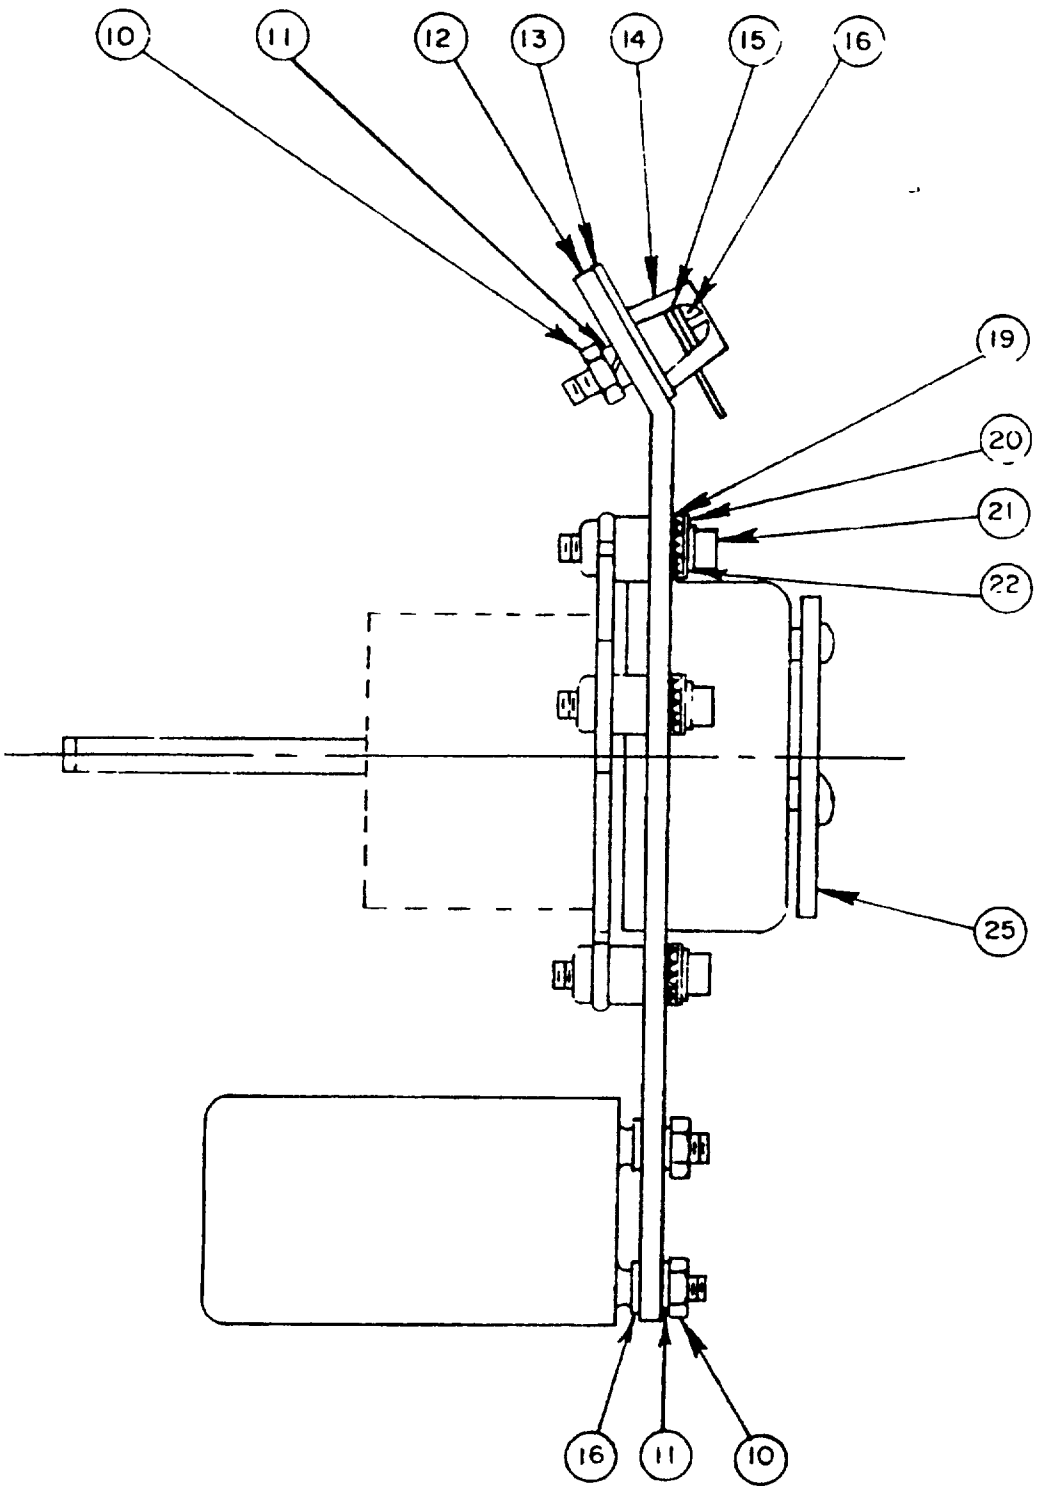

SIDE VIEW

FIGURE 2 Mounting plate assembly - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:47Z
Check the source to verify that this is the current version before use.

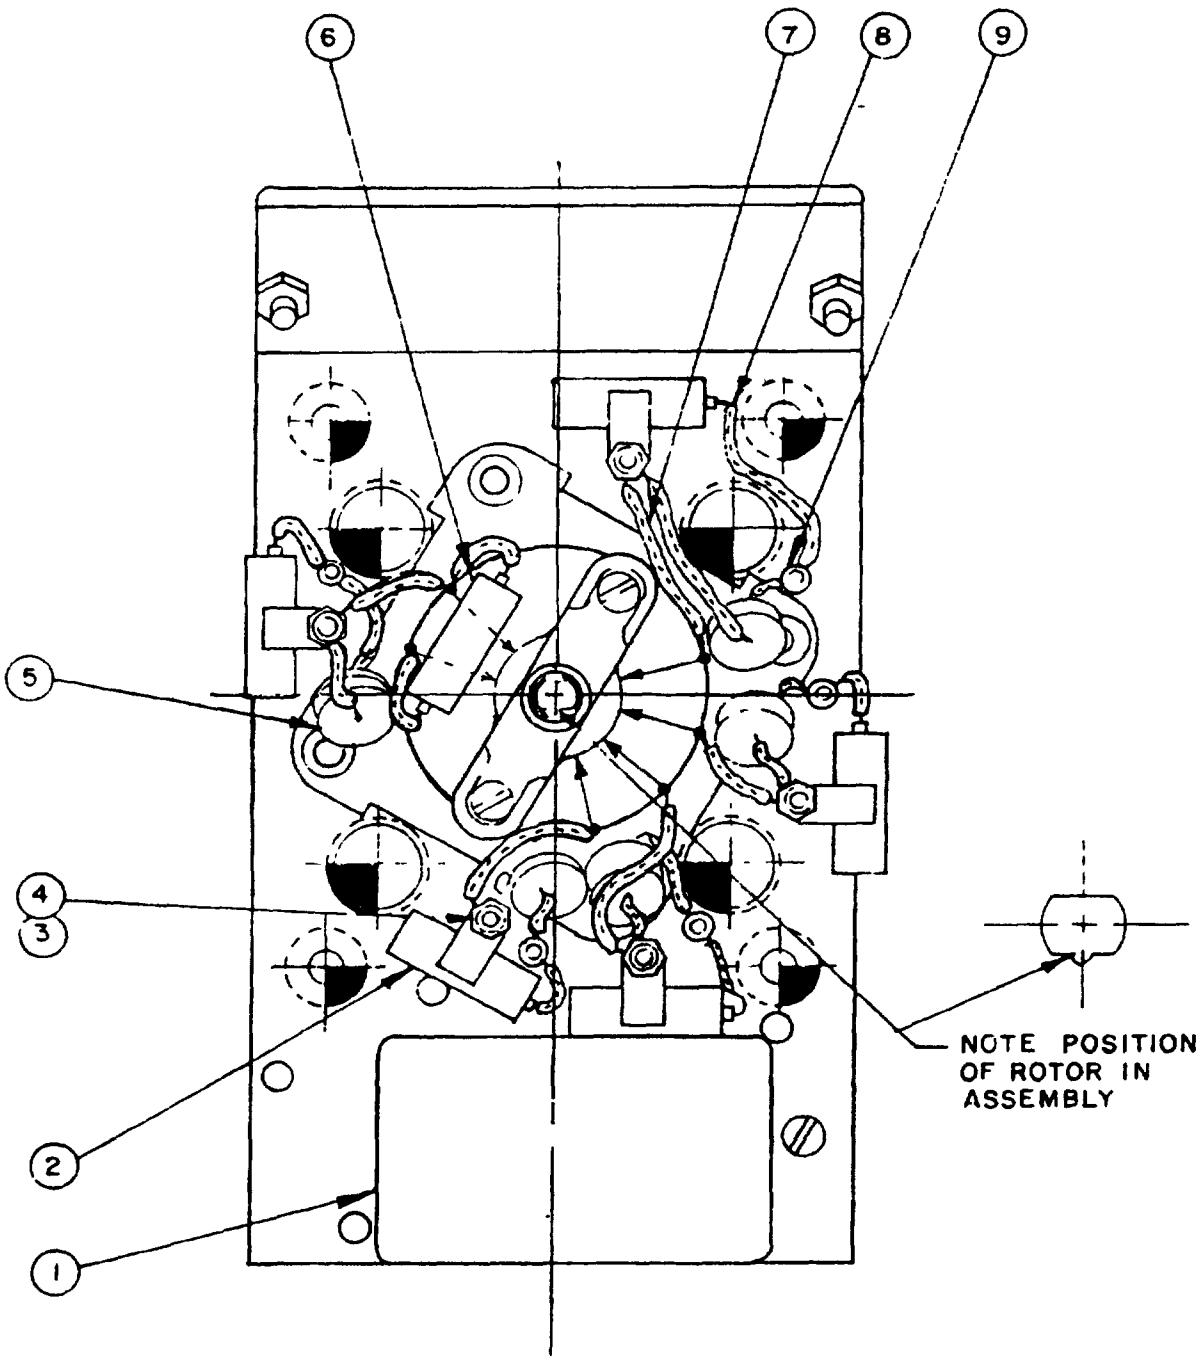

TOP VIEW

FIGURE 2. Mounting plate assembly - Continued


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:47Z
Check the source to verify that this is the current version before use.

Stock list (mounting plate assembly)

Item number	Nomenclature	Quantity required
32	Cable jacket	
31	#20 Stranded polytetra-fluorethylene wire	
30	#22 Solid copper wire	
29	Insulated stud	5
28	Diode, 1N5616 in accord. with MIL-S-19500/427	4
27	Cable assembly	1
26	#4-40 Machine nut	1
25	Rotary Sol. selector, in accordance with MIL-R-4040/2	1
24	Cable assembly	1
23	#4-40 Bind. hd. screw	6
22	#8 Lockwasher	4
21	#8-32 Allen hd. screw	4
20	#8 Flat washer	4
19	#8 Lockwasher (ext.)	4
18	#6-32 Bind. hd. screw	2
17	Dummy lug	7
16	#6 Flat washer	6
15	#6 Washer (fibre)	2
14	Terminal block	1
13	Designation strip	1
12	Mtg. plate & spacers assy.	1
11	#6 Lockwasher	6
10	#6-32 Machine nut	6
9	Insulated stud	5
8	#20 polytetra-fluorethylene tubing	
7	#20 Stranded polytetra-fluorethylene wire	
6	Capacitor CQ10A1KE333K3, in accord. with MIL-C-19978/20	1
5	Choke coil, molded	6
4	Insulated stud	5
3	#4 Lockwasher	6
2	Capacitor, CQ10A1KE333K3, in accord. with MIL-C-19978/20	6
1	Relay, hermet. sealed, Potter & Brumfield CDA 37-70011, or equal.	1

FIGURE 2. Mounting plate assembly. - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:47Z
Check the source to verify that this is the current version before use.

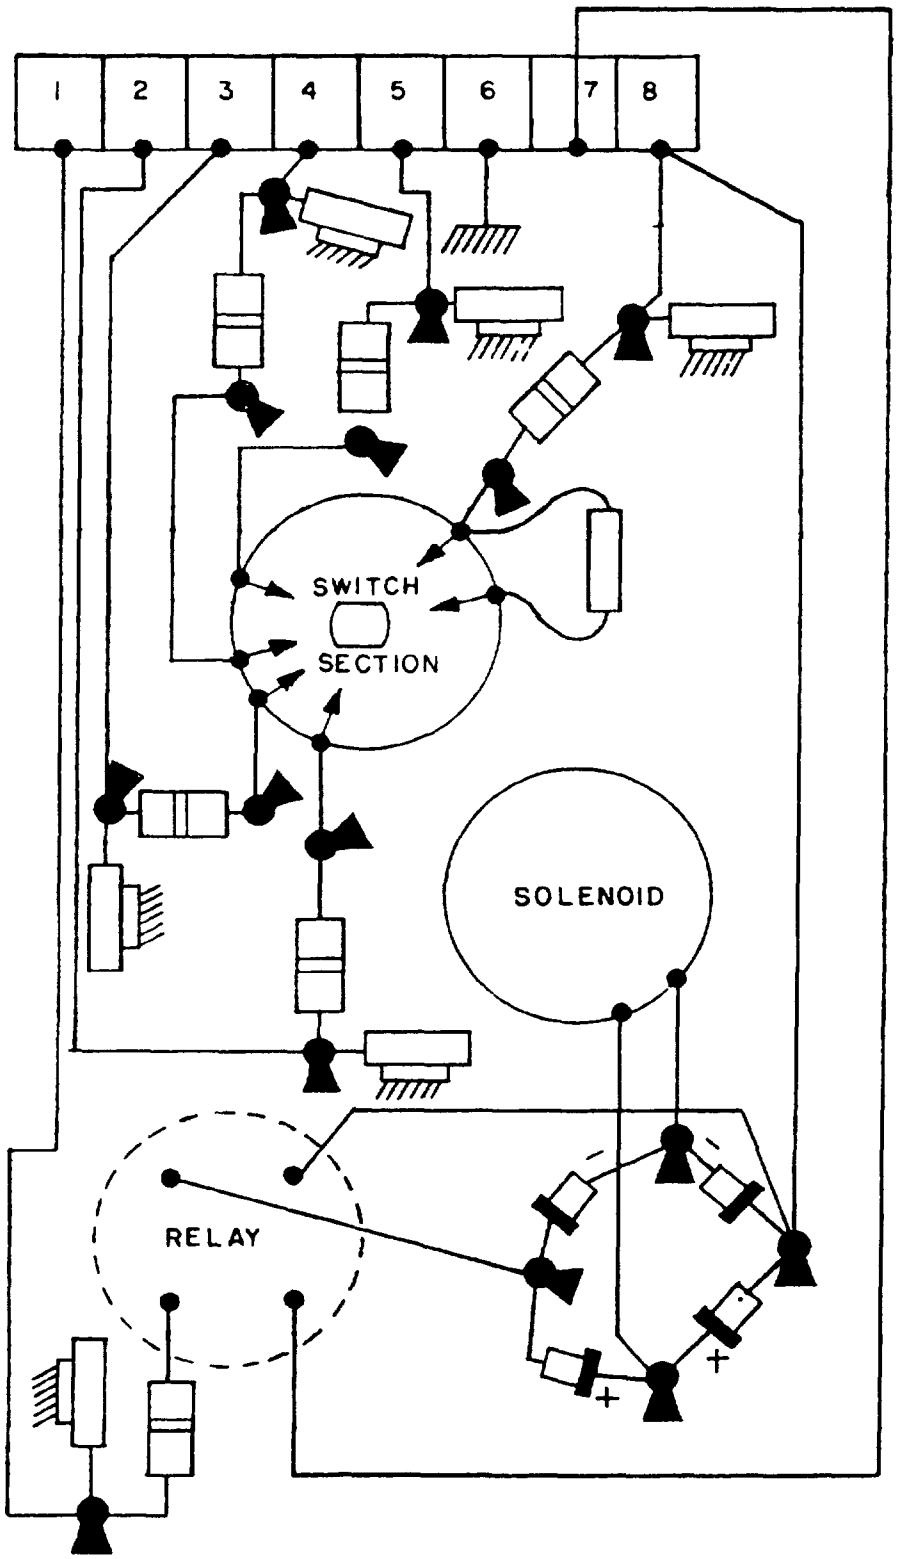

WIRING DIAGRAM

FIGURE 2 Mounting plate assembly - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:47Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction See figure 1 (driver unit) and figure 2 (mounting plate assembly).

Rotary solenoid coil characteristics: See table I.

Assembly couplings Male shaft assemblies shall mate with female shaft assemblies of switch section assembly (see MIL-S-28714/3).

Duty cycle 10 percent on, 90 percent off.

Continuous on time 10 seconds (maximum).

Torque 100 inch-ounce (minimum) with minimum input voltage.

Military part number M28714/2-01.

TABLE I. Solenoid coil characteristics.

AC input voltage	DC working voltage	Current (in amperes)
130 max	117	2.25 max
120 nom	108	1.97 nom
110 min	99	1.73 min

Preparing activity
Navy - EC

Agent
DLA - ES

(Project 5930-N509-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:47Z
Check the source to verify that this is the current version before use.