
MILITARY SPECIFICATION SHEET

SWITCH, ROTARY, SOLENOID OPERATED, (SWITCHBOARD-SELECTOR), SWITCH SECTION ASSEMBLY

This specification sheet is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the assembly described herein shall consist of this document and the latest issue of Specification MIL-S-28714.

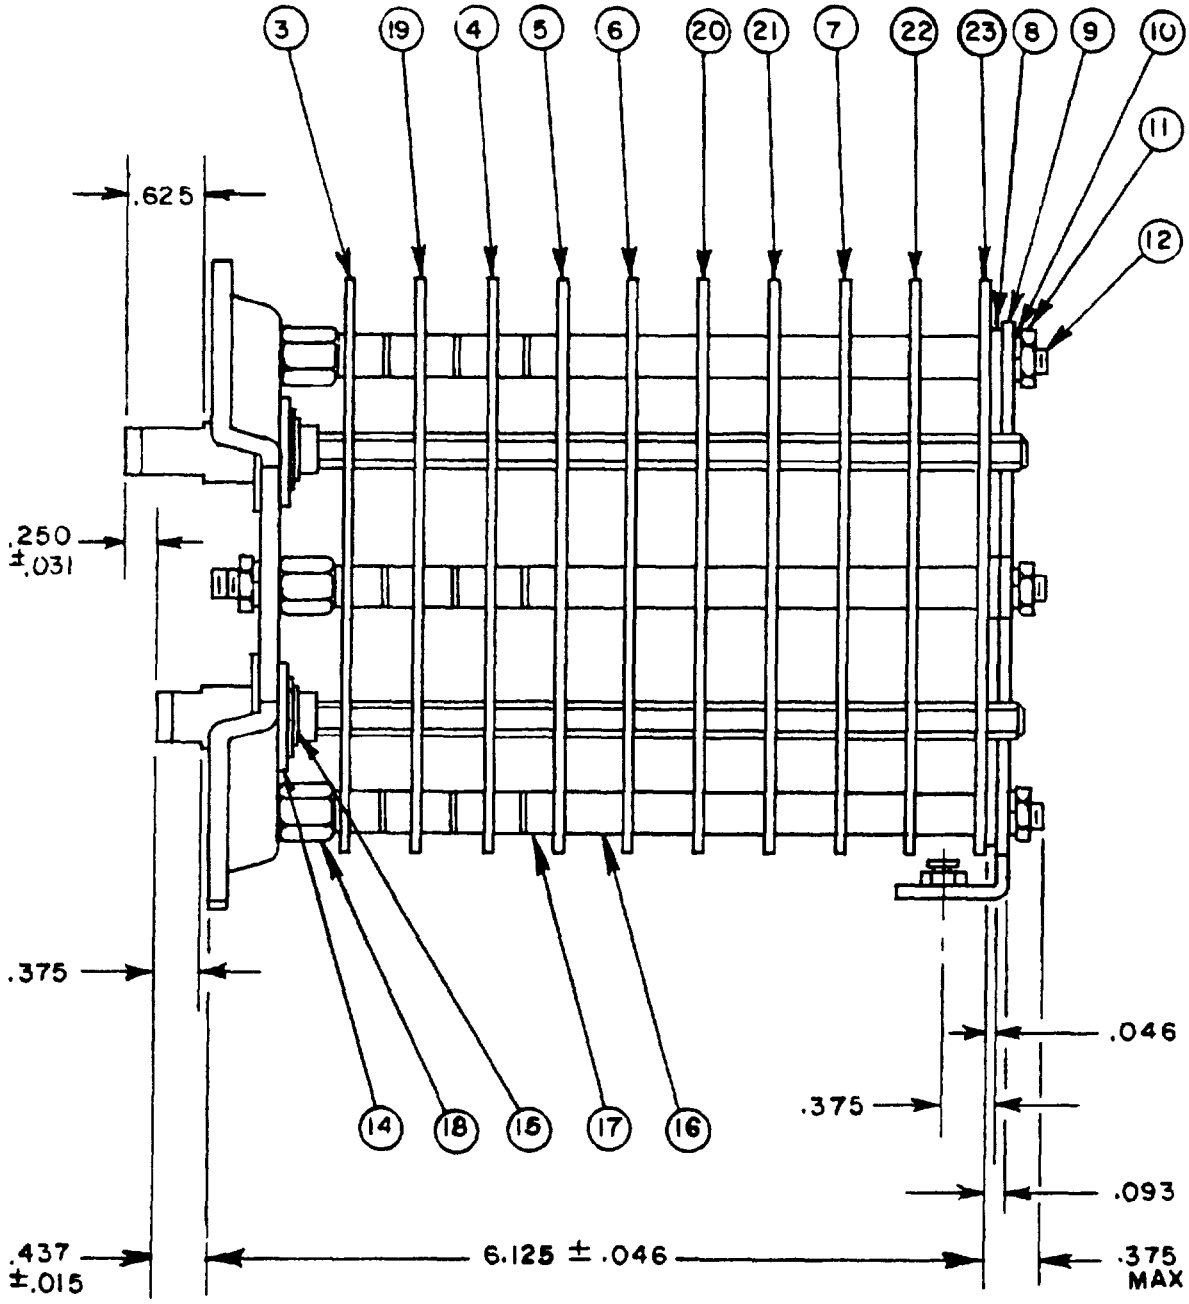

SIDE VIEW

FIGURE 1. Switch section assembly.

(B) denotes changes

★U.S GOVERNMENT PRINTING OFFICE 1981—703-023/345

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:47Z
Check the source to verify that this is the current version before use.


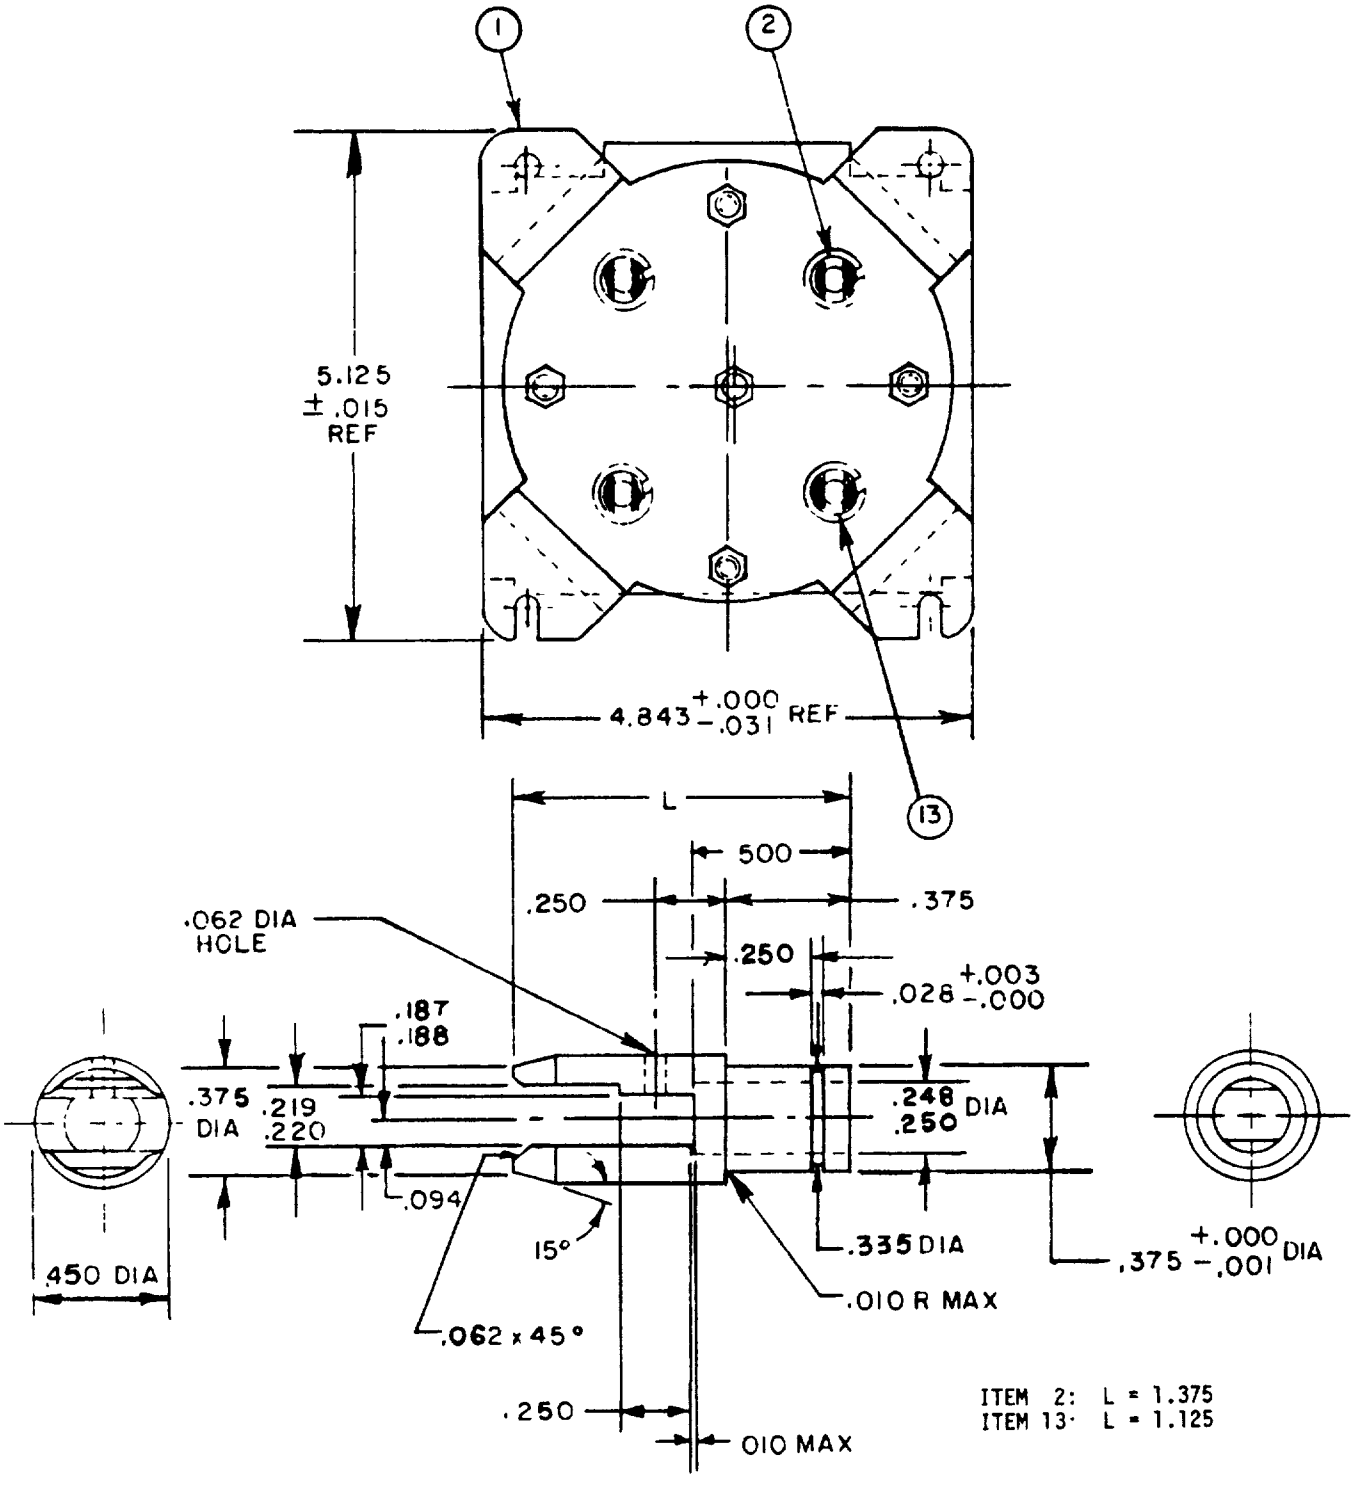


FIGURE 1. Switch section assembly - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:47Z
Check the source to verify that this is the current version before use.

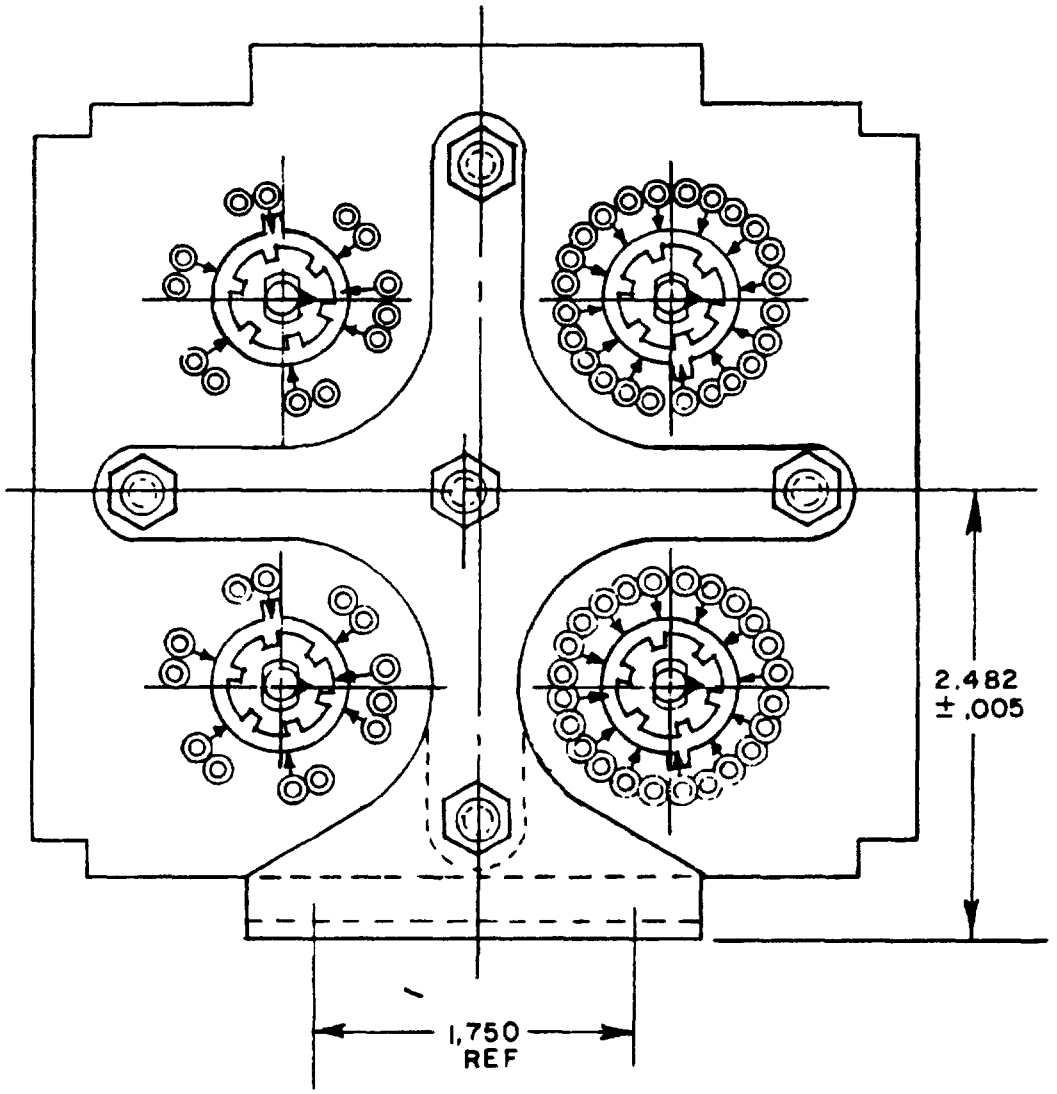

REAR VIEW

FIGURE 1. Switch section assembly. - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:47Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM
.001	.03	.248	6.30
.003	.08	.250	6.35
.005	.13	.335	8.51
.010	.25	.375	9.52
.015	.38	.437	11.10
.028	.71	.450	11.43
.031	.79	.500	12.70
.046	1.17	.625	15.88
.062	1.57	.687	17.45
.093	2.36	1.125	28.58
.094	2.39	1.375	34.92
.156	3.96	1.750	44.45
187	4.75	2.482	63.04
188	4.78	4.483	123.01
.218	5.54	5.125	130.18
.220	5.59	6.125	155.58


Stock list (switch section assembly)

Item number	Nomenclature	Deck number	Number required
23	Deck assembly	10	1
22	Deck assembly	9	1
21	Deck assembly	7	1
20	Deck assembly	6	1
19	Deck assembly	2	1
18	#10-32 Hex. nut (special)		5
17	Spacer		15
16	Spacer		30
15	"C" Washer		4
14	Washer		4
13	Shaft assembly		2
12	Strut screw		5
11	#10-32 Machine nut		10
10	#10 Lockwasher		10
9	Bracket assembly		1
8	Insulating plate		1
7	Deck assembly	8	1
6	Deck assembly	5	1
5	Deck assembly	4	1
4	Deck assembly	3	1
3	Deck assembly	1	1
2	Shaft assembly		2
1	Mounting plate assembly		1

NOTES
1. Dimensions are in inches, with tolerances as noted.
2. Configuration is optional provided it falls within the envelope size specified.
3. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm

FIGURE 1. Switch section assembly. - Continued


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:47Z
Check the source to verify that this is the current version before use.

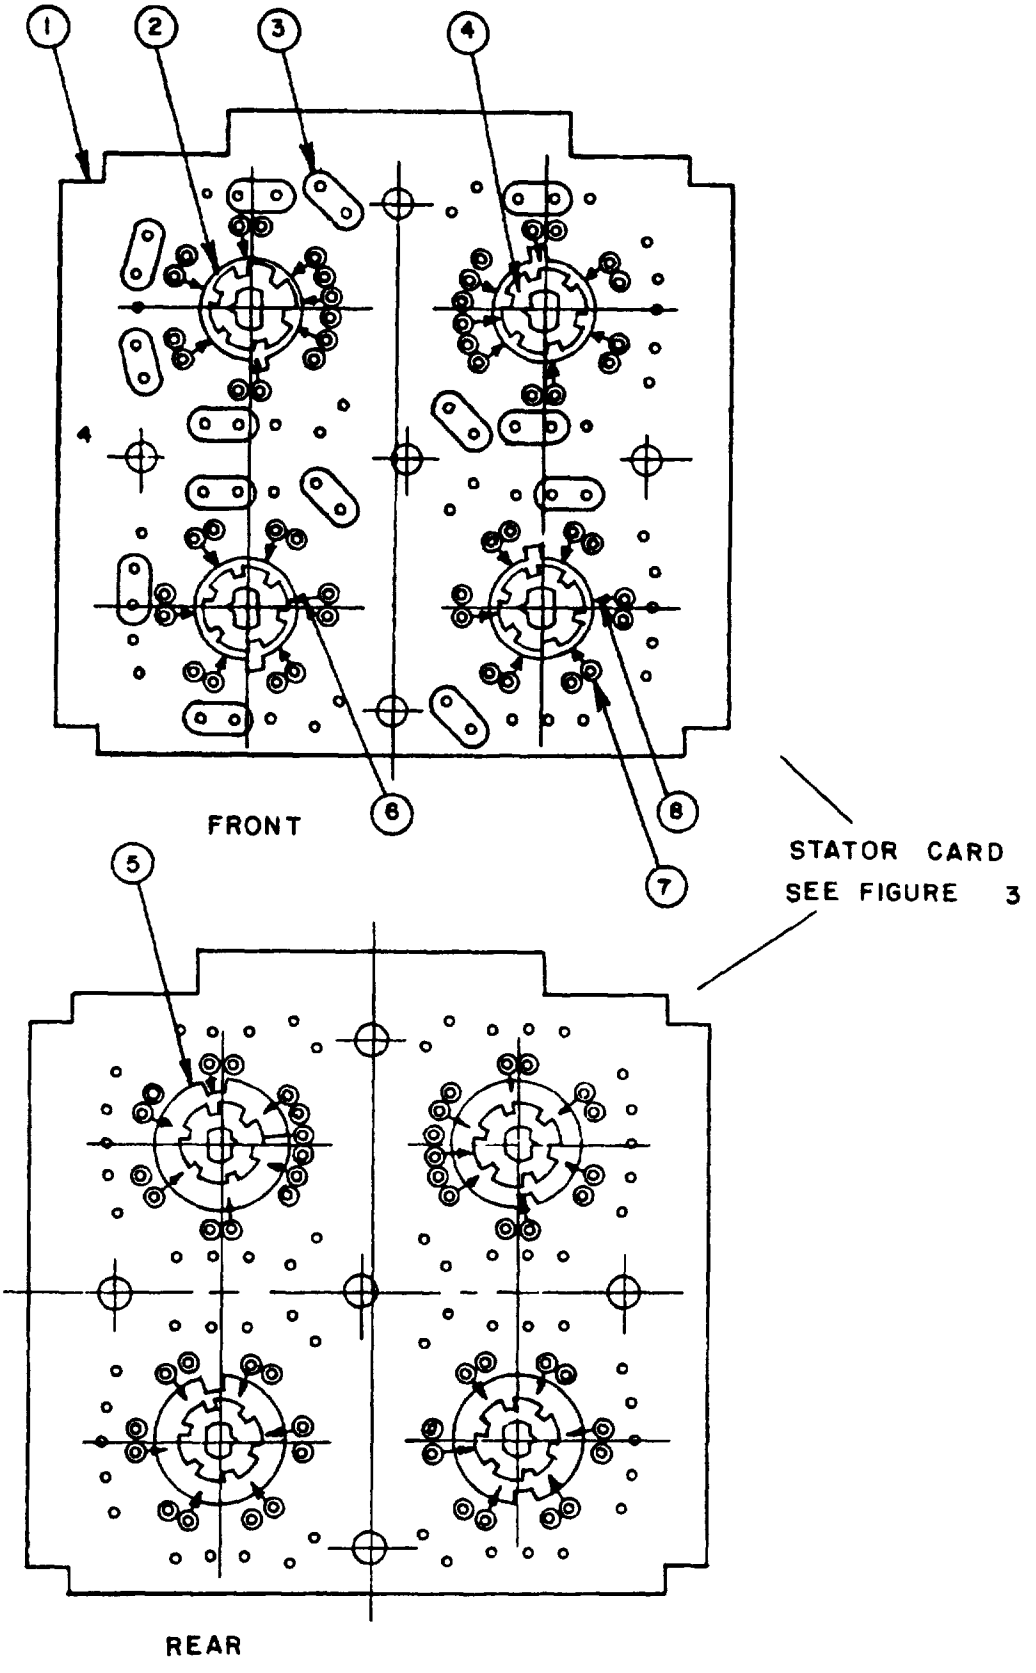


DECKS 1 AND 2

FIGURE 2. Switch decks.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:47Z
Check the source to verify that this is the current version before use.

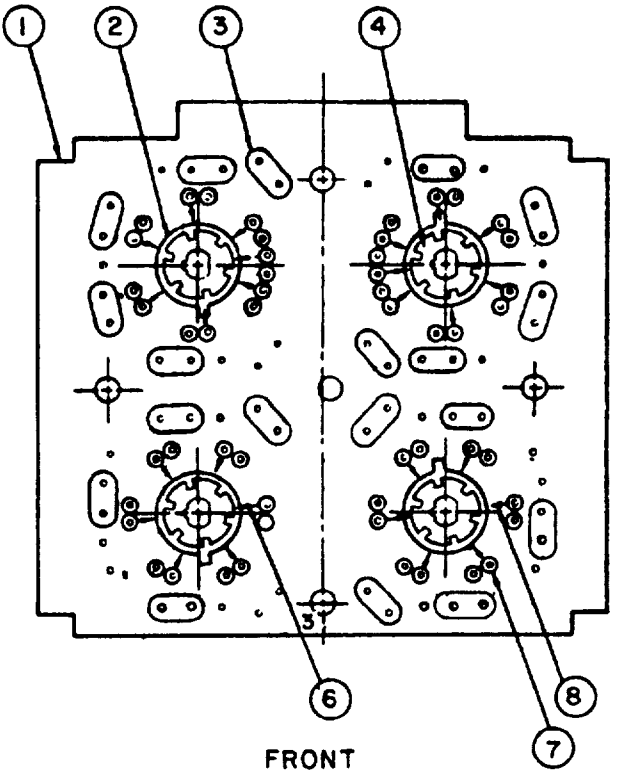


STATOR CARD
SEE FIGURE 3

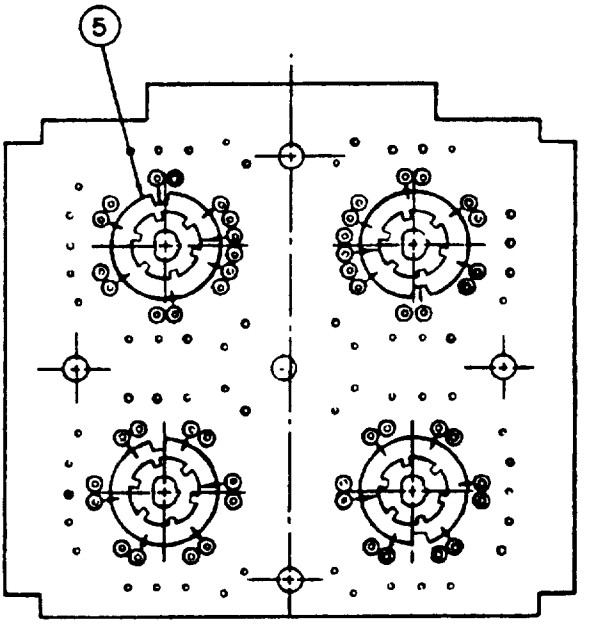


DECK 3

FIGURE 2 Switch decks. - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:47Z
Check the source to verify that this is the current version before use.

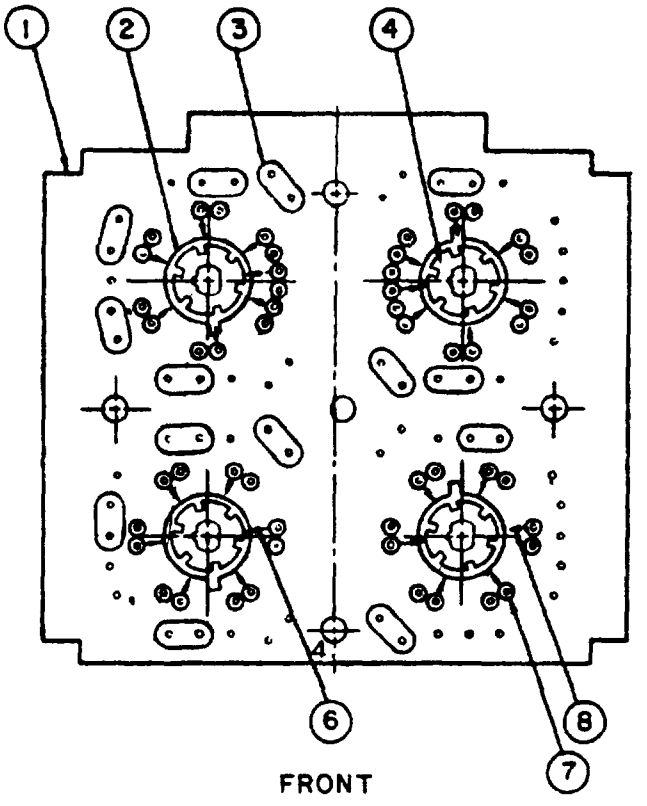


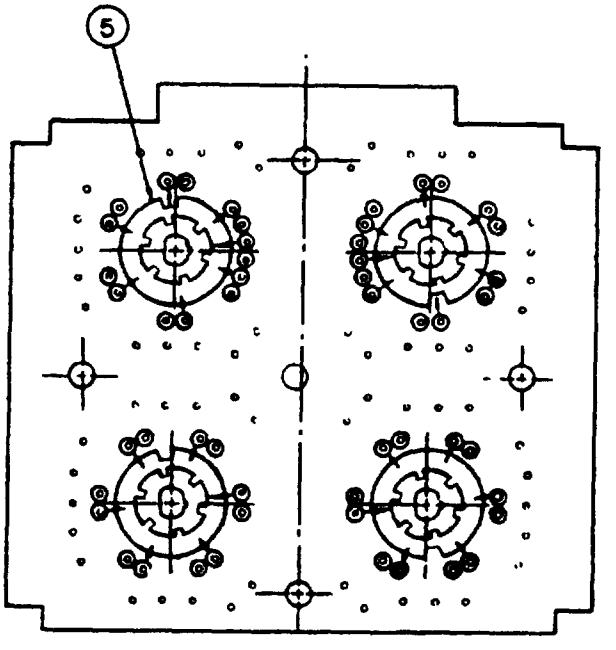

DECK 4


FIGURE 2. Switch decks. - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:47Z
Check the source to verify that this is the current version before use.

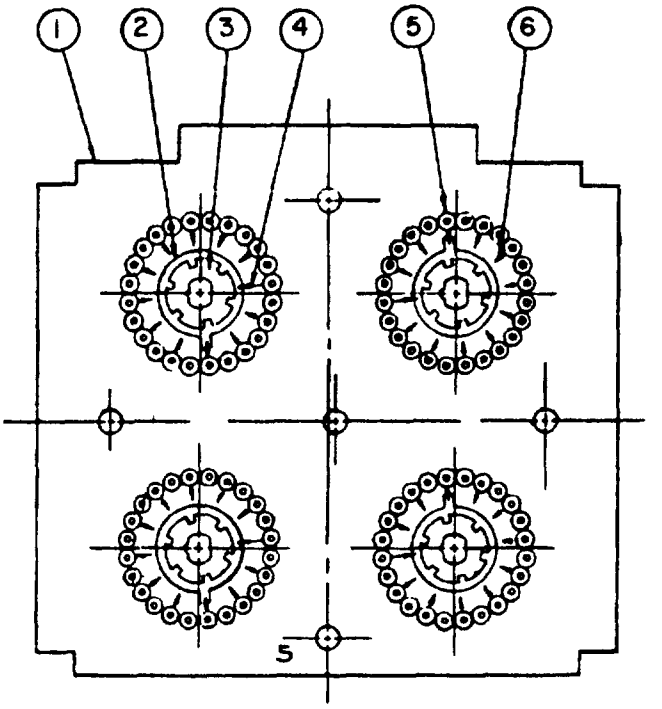

FRONT

STATOR CARD
SEE FIGURE 3

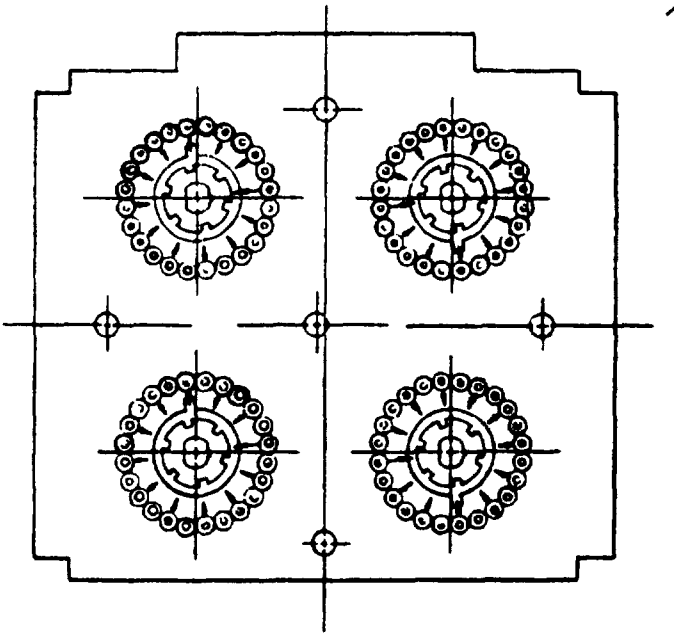


REAR

DECKS 5, 6, AND 7


FIGURE 2. Switch decks - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:47Z
Check the source to verify that this is the current version before use.

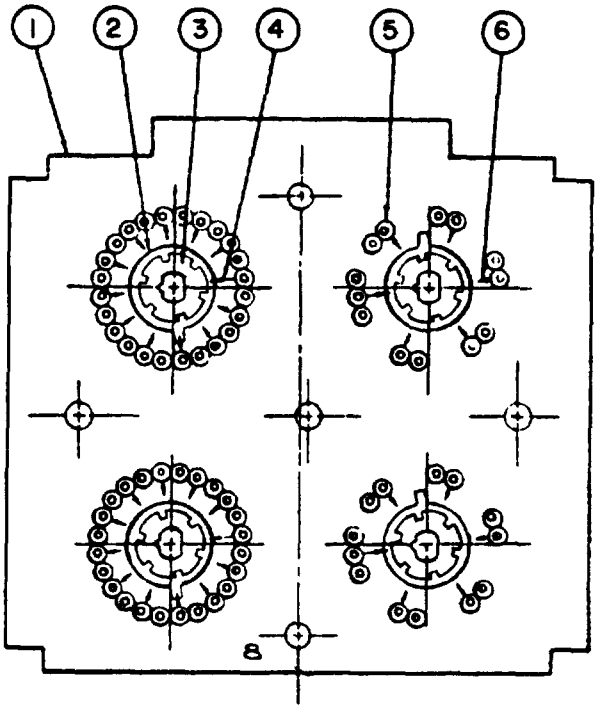

FRONT

STATOR CARD
SEE FIGURE 3

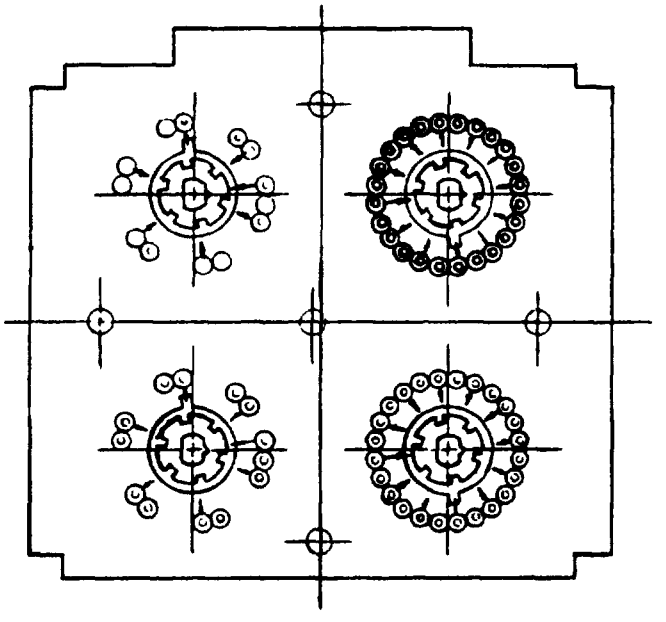

REAR

DECKS 8, 9, AND 10

FIGURE 2. Switch decks. - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:47Z
Check the source to verify that this is the current version before use.

Stock list (decks 1 through 4)

Item number	Nomenclature	Number required
8	Short clip	44
7	Eyelet	52
6	Long clip	8
5	Rotor blade	4
4	Rotor insulator	8
3	1/ Capacitor	14
2	Rotor blade	4
1	P. C. stator	1


1/ Item 3 (capacitor) to be Fixed, Mica Dielectric, 62 pF, ±5 percent, 500 Vdc, Electro Motive Manufacturing Company number (or equivalent).


Stock list (decks 5 through 10)

Item number	Nomenclature	Number required
6	Short clip	88
5	Eyelet	96
4	Long clip	8
3	Rotor insulator	8
2	Rotor blade	8
1	P. C. stator	1

FIGURE 2. Switch decks. - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:47Z
Check the source to verify that this is the current version before use.

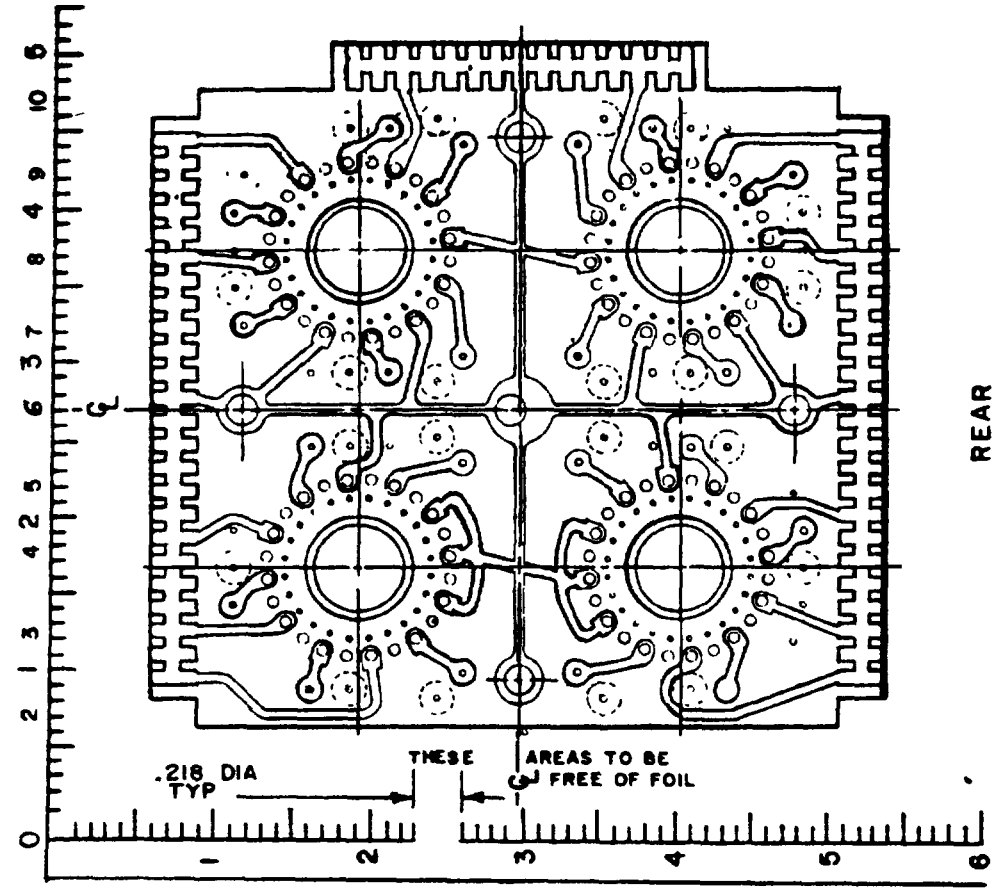


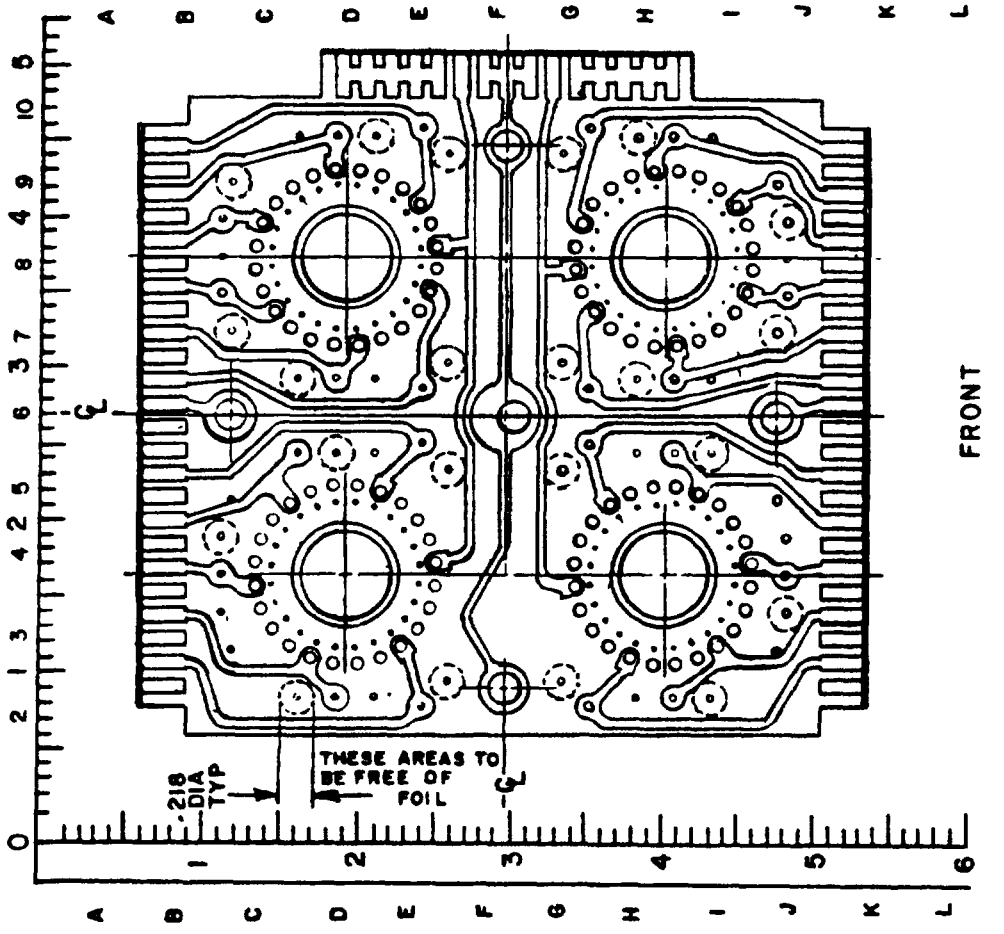

DECKS 1, 2, 3, AND 4

FIGURE 3. Stator, printed circuit cards.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:47Z
Check the source to verify that this is the current version before use.

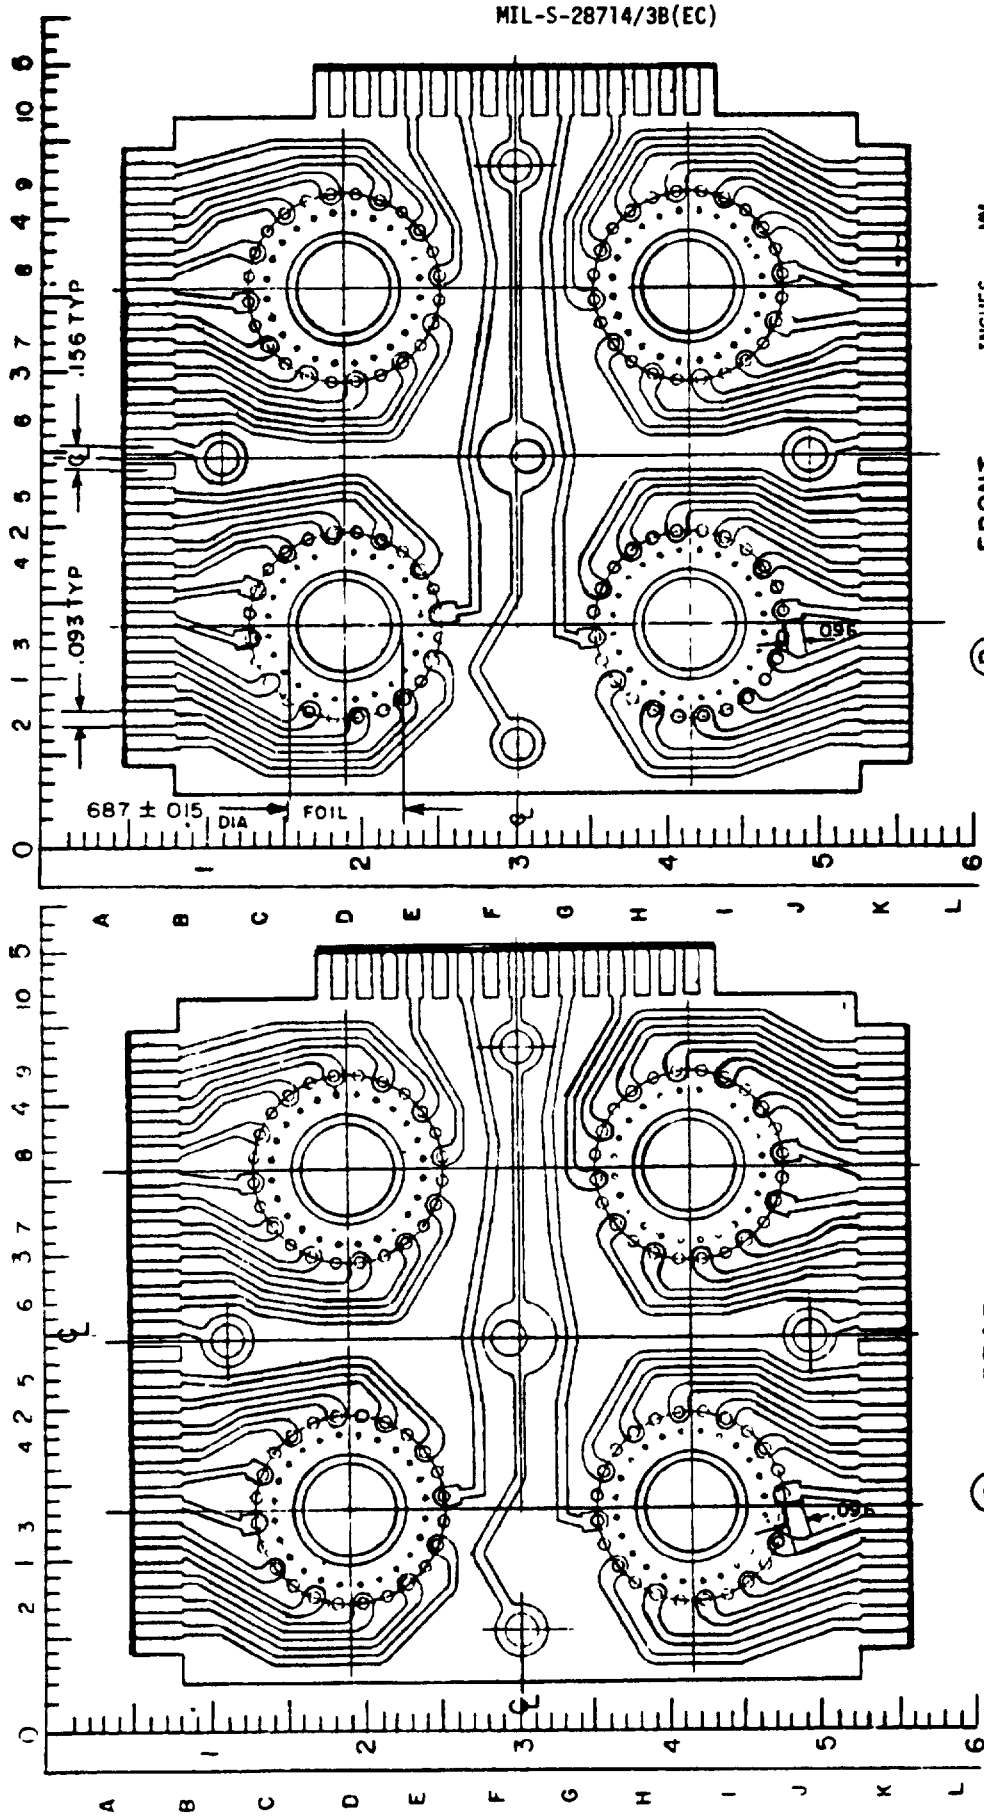

INCHES	MM
.015	.38
.093	2.36
.096	2.44
.156	3.96
.218	5.54
.687	17 45

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 00 inch = 25 4 mm.

FIGURE 3. Stator, printed circuit cards. - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:47Z
Check the source to verify that this is the current version before use.

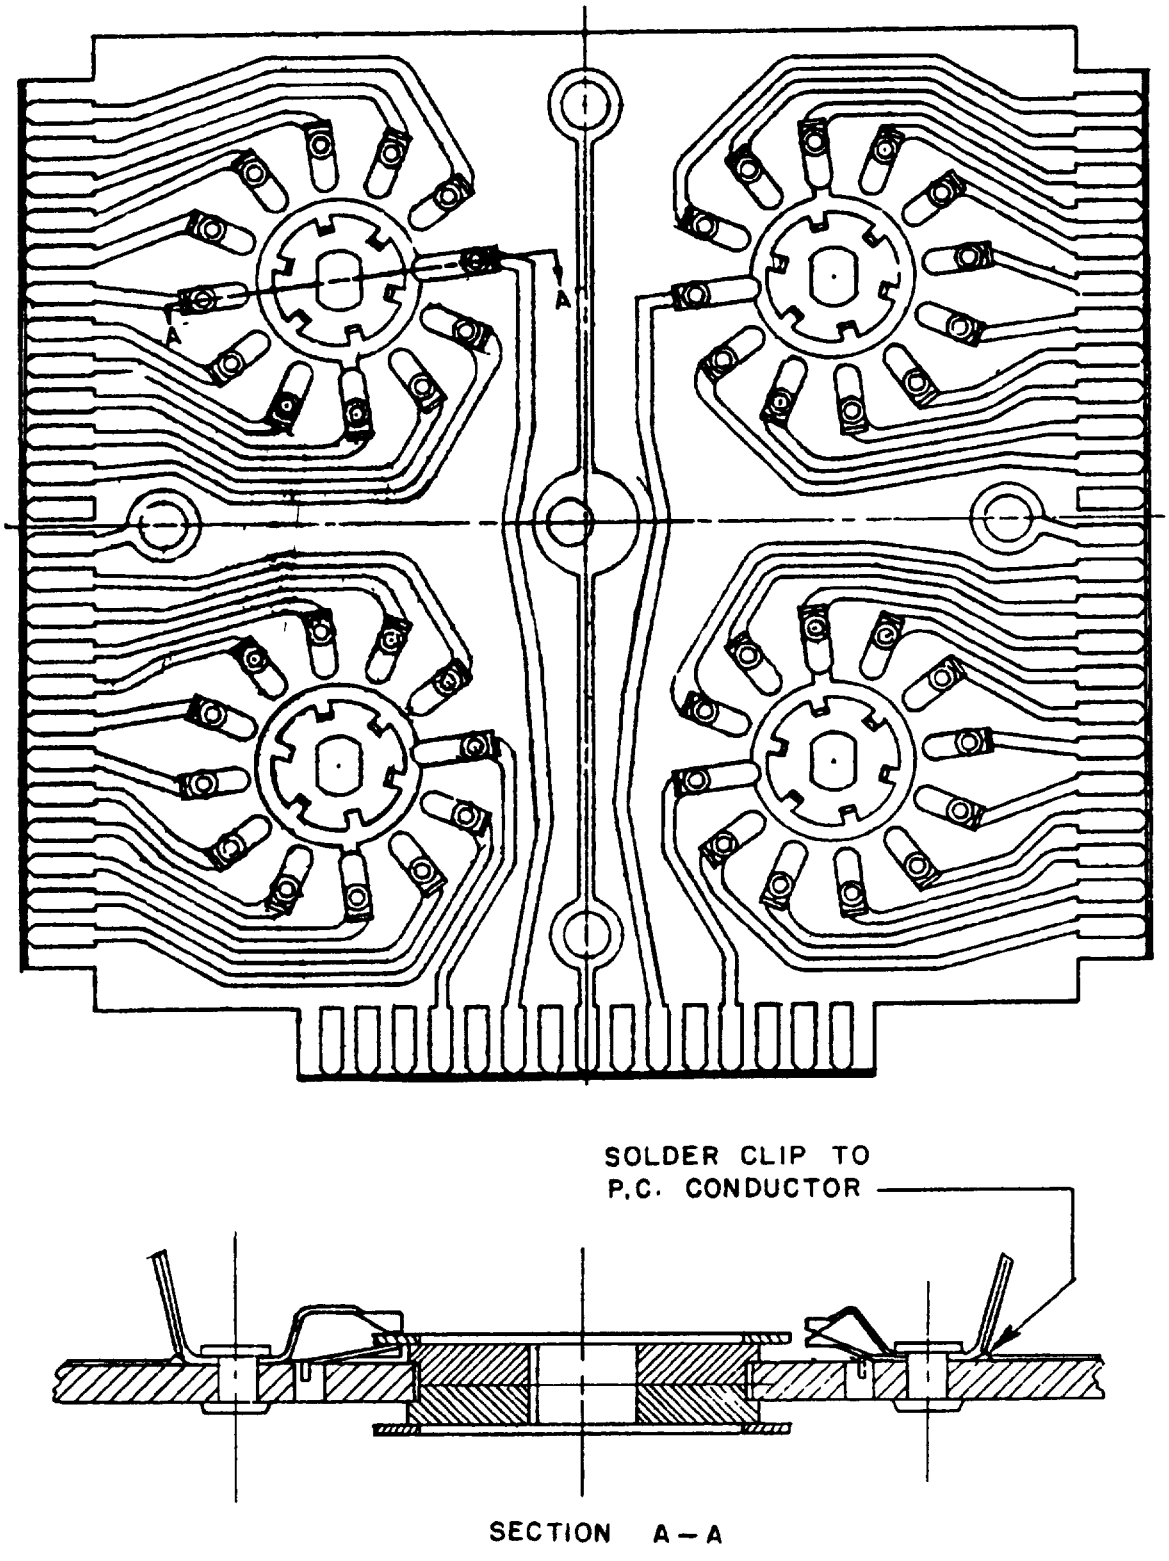


FIGURE 4. Clip arrangement, typical, all decks

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:47Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction. See figure 1.

Couplings. Female ends of shaft assemblies shall mate with male shaft assemblies of the driver unit (see MIL-S-28714/2).

Switch decks. See figure 2.

Stator cards. See figure 3.

Clip arrangement See figure 4.

Military part number. M28714/3-01.

Preparing activity
Navy - EC

Agent
DLA - ES

(Project 5930-N509-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:47Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-S-28714/3B

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:47Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command
Defense Standardization Program Branch
Department Of The Navy
Washington, D.C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:47Z
Check the source to verify that this is the current version before use.