MIL-F-63229 (AR)
AMENDMENT 1
8 SEPTEMBER 1983
SUPERSEDING
MIL-F-63229 (AR)
17 August 1979

MILITARY SPECIFICATION

FUZE, PIBD, XM740, SHOCK WAVE SENSOR FOR

This amendment forms a part of Military Specification MIL-F-63229 (AR) dated 17 August 1979, and is approved for use by the U.S. Army Armament, Munitions and Chemical Command and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 1

Title Block: Add "(M740)" to title and wherever it appears in this specification.

PAGE 2

3.2.2: Delete in its entirety and substitute the following:

"3.2.2 Environmental conditions. Except for temperature tests, these conditions apply with the SWS mounted in a carrier or a test fixture which simulates the mounting of the SWS by its normal means in its normal position in the projectile."

3.2.2.2: Delete in its entirety and substitute the following:

3.2.2.2 Low temperature. The SWS shall meet the performance requirements specified in 3.2.1 when stabilized at temperatures down to -25°F."

PAGE 3

3.2.2.3, line 2: Delete "3.2.2" and substitute "3.2.1".

3.2.2.8, line 1: Delete "Low g acceleration" and substitute "Lateral acceleration."

line 4: Delete the word "forces".

PAGE 4

Figure 1: Delete in its entirety and substitute the following:

FSC 1390



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

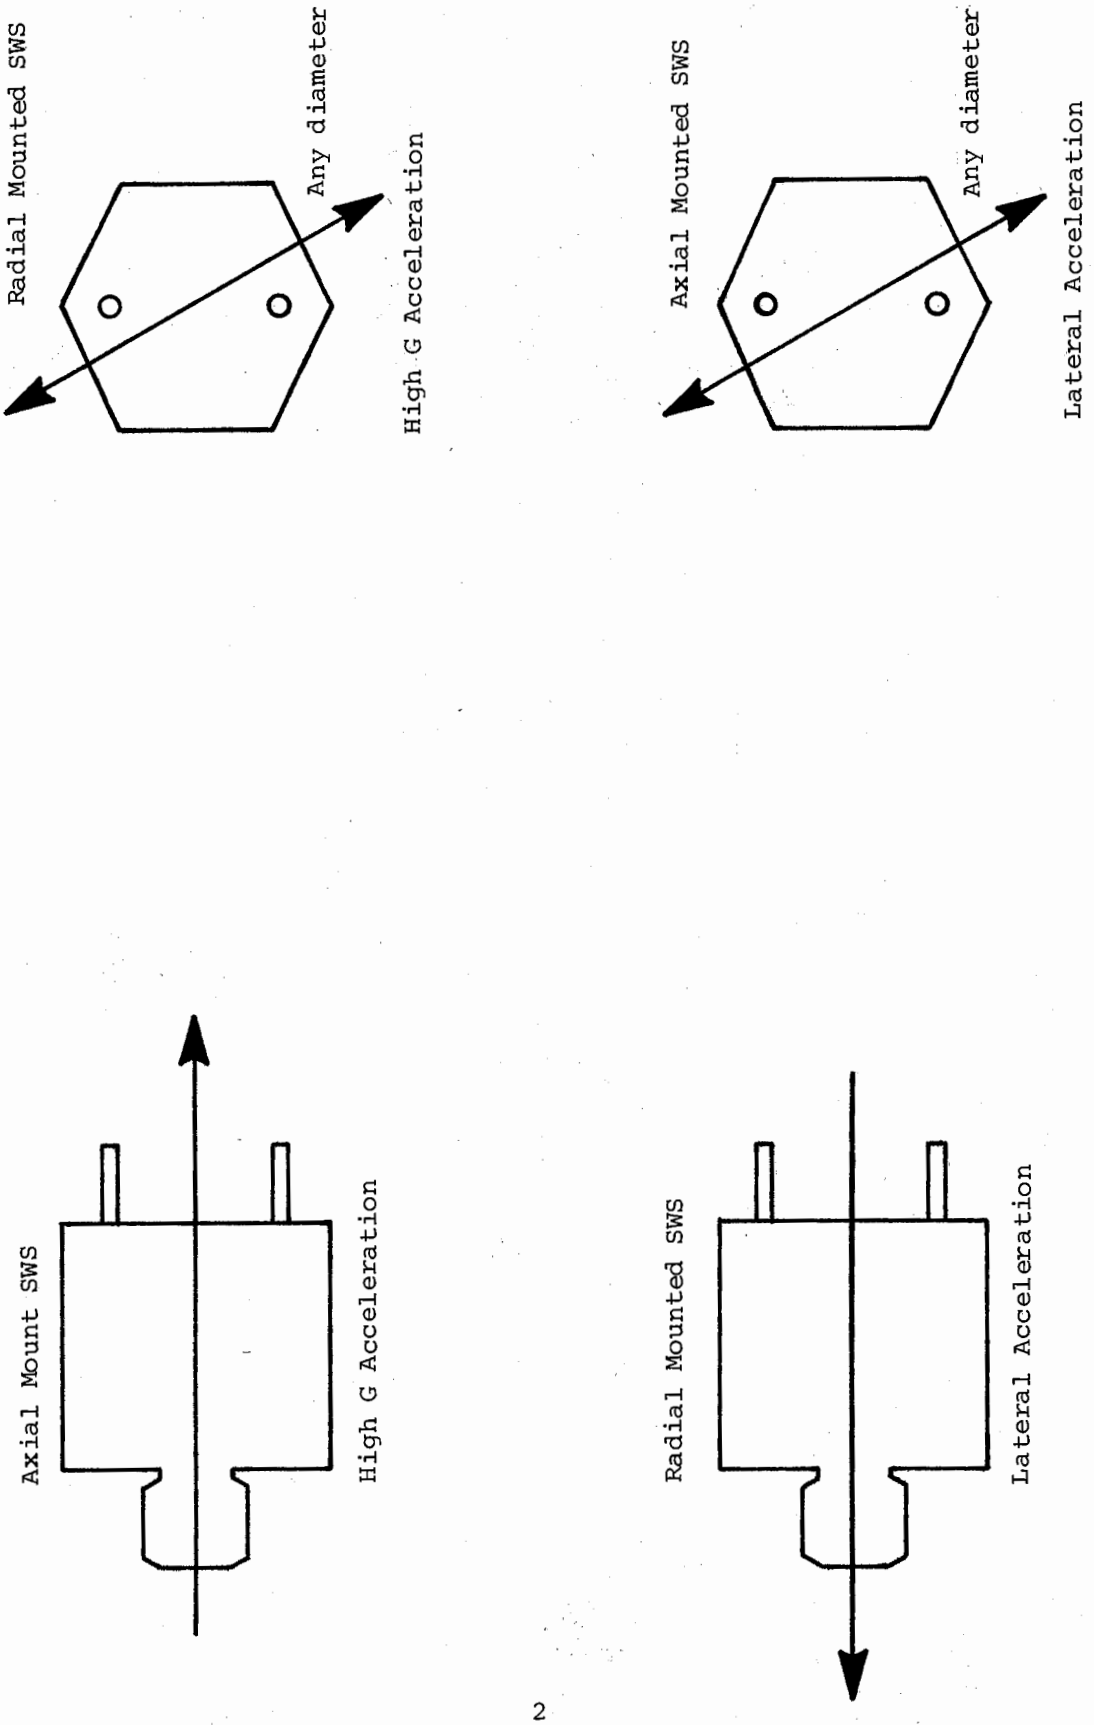


FIGURE 1 - Direction of Applied Acceleration



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

PAGE 6

4.4.2.2, line 6: Add "The test samples can be used as deliverable units."

PAGE 7

4.5.7.1, line 1: Delete "±5°F" and substitute "+5, -0°F".

4.5.7.2, Delete in its entirety and substitute the following:

4.5.7.2 "Low Temperature The SWS shall be conditioned at -25, +0, -5°F for a minimum of one hour. While at temperature the units shall be tested as specified in 4.5.2."

4.5.7.3, line 2: Delete "mounted in a carrier" and substitute "mounted in a carrier in accordance with 3.2.2."

line 3: Delete "±5°F" and substitute "+5, -0°F".

line 7: Delete "±5°F" and substitute "+5, -0°F".

PAGE 8

4.5.7.4, line 2: Delete "mounted in a carrier" and substitute "mounted in a carrier in accordance with 3.2.2."

line 3: Delete "±5°F" and substitute "+0, -5°F".

line 7: Delete "±5°F" and substitute "+0, -5°F".

line 8: Delete "4.5.2.2" and substitute "4.5.2".

PAGE 9

5.1, line 2: Delete "Type II, Class C, Style 1" and substitute "Type I, Class A, Style 2".

PAGE 12

Major 105, Requirements: Add to requirement paragraph "Dwg. 9307240".

Major 106, Requirements: Add to requirement paragraph "Dwg. 9307240".



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

Major 105, Requirements: Delete "Dwg. 9302271" and substitute "Dwg. 9307240".

Major 106, Requirements: Delete "Dwg. 9302271" and substitute "Dwg. 9307240".

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1390-A361)



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.