MIL-T-46835A
14 September 1984
SUPERSEDING
MIL-T-46835(MI)
12 April 1965

MILITARY SPECIFICATION

TEST SET, FIRE CONTROL CIRCUITS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for one type of fire control circuits test set.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the ussue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

Military

MIL-T-152	Treatment, Moisture-and Fungus-Resistant, of Communications, Electronic, and Associated Electrical Equipment.

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-130	Identification Marking of US Military Property.

Beneficical comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Missile Command, ATTN: AMSMI-EDS, Redstone Arsenal, AL 35898-5270, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:02Z
Check the source to verify that this is the current version before use.

MIL-STD-202	Test Methods for Electronic and Electrical Component Parts.
MIL-STD-810	Environmental Test Methods

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

DRAWINGS

Army

10106560	Test Set, Fire Control Circuits.

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.1.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 First Article. When specified, a sample is required which meets all requirements of this specification and shall be manufactured using the same methods and materials proposed for the manufacture of subsequent production lots (see 4.2 and 6.2).

3.2 Materials. Materials used in the manufacture of each test set shall be in accordance with Drawing 10106560 and applicable drawings and specifications referenced thereon.

3.3 Design and construction. Design and construction of the test set shall be in accordance with Drawing 10106560 and applicable drawings and specifications referenced thereon. The test set shall be controlled by a rotary stepping relay. Program banks send out 28-volt signals to external slave relays which substitute known values of signals for variables. Positions 1 through 7 are self test positions and shall check the operation and balance of the differential comparator and program the signals. Positions 8 through 25 shall represent tests on original units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:02Z
Check the source to verify that this is the current version before use.

3.4 Electrical.

3.4.1 Ground potential. The design and construction of the test set shall be such that all external metallic parts are at ground potential at all times (see 4.6.1.1).

3.4.2 Circuitry resistance. The circuitry resistance of each test set shall be in accordance with Drawing 10106560 and applicable drawings and specifications referenced thereon (see 4.6.1.2).

3.4.3 Dielectric strength. There shall be no puncture of insulation, no sparkover, or decrease in dielectric strength when the insulated areas of the test set are subjected to an alternating current (ac) root mean square (rms) potential of 500 volts plus twice the rated voltage at a frequency of 60 cycles per second (cps) for a period of not less than 3 seconds nor more than 5 seconds (see 4.6.1.3).

3.4.4 Insulation resistance. Unless otherwise specified on applicable drawings, all insulation shall have a minimum resistance of 100 megohms between isolated circuits, and between ungrounded circuits and ground (see 4.6.1.4).

3.5 Performance characteristics.

3.5.1 Input voltages. The test set shall operate satisfactorily when supplied with input voltages within the tolerances specified in Table I (see 4.6.2.1).

3.5.2 Current. The input current, under load, shall be not greater than that specified in Table I (see 4.6.2.2).

3.5.3 Input signal (150 volts direct current (vdc)) (see 4.6.2.3).

3.5.3.1 Switch positions 1 and 2. With the differential amplifier grids unbalanced by 0.8 vdc plus or minus 2 percent, a resultant mixed plate signal of 150 vdc minimum shall energize the stop circuit (see 4.6.2.3.1).

3.5.3.2 Switch positions 3 and 4. With the differential amplifier grids unbalanced by 1.2 vdc plus or minus 2 percent, the stop circuit shall be activated by a signal of 150 vdc, 1 percent regulation. With the output of the differential amplifier switched to the skip circuit and a signal greater than 150 vdc applied, the skip circuit shall be activated (see 4.6.2.3.2).

3.5.3.3 Switch positions 5 through 25. Switch positions 5 through 25 shall perform the functions as specified in Table II (see 4.6.2.3.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:02Z
Check the source to verify that this is the current version before use.

TABLE I. Input Voltage and Current

Input voltage	Regulation	Load current (± 10%)
115 volts (v) ±6v, ac, single phase, 400 cps ± 20 cps.	5%	50 volt-amperes (va)
+250 vdc ± 2.5 vdc	1%	50 milliamperes (ma)
-250 vdc ± 2.5 vdc	1%	30 ma
+100 vdc ± 1.0 vdc	1%	10 ma
+28 vdc ± 2.8 vdc	5%	2 amperes (a)

TABLE II. Switch Positions Function

Switch position	Function
1 and 2.....	See 3.5.2.1
3 and 4.....	See 3.5.3.2
5, 6, and 7.....	Self test
8 through 12.....	External units
13 and 14.....	Self test
15 through 17.....	External units
18.....	None
19 and 20.....	External units
21 and 22.....	Self test
23 through 25.....	External units

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:02Z
Check the source to verify that this is the current version before use.

3.6 Environmental.

3.6.1 Temperature.

3.6.1.1 Operating. The test set shall be capable of satisfactory operation at any temperature from 32 degrees Fahrenheit (F) (zero degrees centigrade (C)), minimum exposure of 3 days, to 122 degrees F (50 degrees C), minimum exposure of 4 hours.

3.6.1.2 Nonoperating. The test set shall be capable of storage and transportation at any temperature from minus 65 degrees F (minus 54 degrees C), for periods of not less than 3 days, to 160 degrees F (71 degrees C), for periods of not less than 6 hours per day.

3.6.2 Altitude.

3.6.2.1 Ground operation. The test set shall operate satisfactorily at an altitude of 10,000 feet (ft.) (3,048 meters (m)) above sea level; equivalent to a pressure of 20.6 inches of mercury (in.hg) (523 millimeters (mm.)-hg).

3.6.2.2 Air transportation. The test set shall operate satisfactorily after being subjected to an altitude of 25,000 ft. (7,260 m); equivalent to a pressure of 11.1 in-hg (282 mm.-hg) for 12 hours.

3.6.3 Shock. The test set shall be capable of withstanding, without damage, the shocks that occur in normal operating and nonoperating conditions (see 4.6.3.3).

3.6.4 Relative humidity. The test set shall operate satisfactorily after being subjected to 100 percent relative humidity at all temperatures not greater than 90 degrees F (32 degrees C), or at any relative humidity encountered at temperatures greater than 90 degrees F (32 degrees C) (see 4.6.3.4).

3.6.5 Vibration. The test set shall not be damaged nor shall its performance be impaired when subjected to vibration frequencies from 10 to 300 cps for a minimum period of 30 minutes, and vibration tests as specified in 4.6.3.5.

3.6.6 Fungus resistance. The test set shall be treated in accordance with MIL-T-152. The unit shall not be damaged nor shall its performance be impaired when subjected to the fungus tests specified in 4.6.3.6.

3.7 Details of components. Components of the test shall be in accordance with Drawing 10106560 and applicable drawings and specifications referenced thereon.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:02Z
Check the source to verify that this is the current version before use.

3.8 Dimensions. Dimensions and tolerances shall be in accordance with Drawing 10106560 and applicable drawings and specifications referenced thereon.

3.9 Color and finish. The color and finish of the test set shall be in accordance with Drawing 10106560 and applicable drawings and specifications referenced thereon.

3.10 Product marking. Product marking shall be in accordance with Drawing 10106560, the applicable drawings referenced thereon, and MIL-STD-130.

3.11 Workmanship. Uniformity of shapes, dimensions, and performance shall permit interchangeability of replaceable subassemblies and complete assemblies. There shall be no cracks, breaks, chips, bends, burrs, loose attaching parts, loose electrical connections, or any evidence of poor workmanship which causes the test set to be unsuitable for the purpose intended. The unit shall be clean and free of foreign material.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification.

4.1.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.6.1, 4.6.2, 4.6.3).

b. Quality conformance inspection (see 4.6.1, 4.6.2)

4.2 First article sample. Unless otherwise specified (see 6.2), one unit, which has been manufactured under the same conditions as those proposed for subsequent units of production, shall be submitted for Government approval. The unit shall be subjected to all examinations and tests specified herein. Unless otherwise specified (see 6.2), the Government will perform the examinations and tests at the contractor's plant. Failure to comply with any requirement of this specification shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:02Z
Check the source to verify that this is the current version before use.

4.3 Inspection. Unless otherwise specified (see 6.2), by the procuring activity, inspection for examination and testing shall be 100 percent of production, with the exception of the environmental tests which shall be performed on the first article sample only.

4.3.1 Lot size. The inspection lot size shall not exceed that quantity of items produced in one continuous operation by the same manufacturer and manufactured in accordance with the same drawing, drawing revision, specification, and specification revision.

4.3.2 Examination. Visual and tactile examination shall be in accordance with MIL-STD-105 acceptable quality levels (AQL's) as specified in 4.3.2.1.

4.3.2.1 Classification of defects.

4.3.2.1.1 Final assembly - Drawing 10106560. Reference drawings listed herein cover a detail of the final assembly drawing.

Categories	Defects	Gage or method of inspection	Reference
Critical	None defined		
Major	AQL 0.65 percent.		
	Any part affecting functional performance missing.	Visual	10106560
	Nameplate data illegible or incorrect	Visual	10106560
	Electrical connectors marked illegibly or incorrectly.	Visual	10106560
	Operating controls marked illegibly or incorrectly.	Visual	10106560
Minor	AQL 4.0 percent.		
	Any part not affecting functional performance missing.	Visual	10106560
	Paint color not as specified	Visual	10106560
	Finish blistered or flaked	Visual	3.11
	Workmanship poor	Visual and tactile	3.11

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:02Z
Check the source to verify that this is the current version before use.

4.3.2.1.2 Panel, test set - Drawing 10106560.

Categories	Defects	Gage or method of inspection	Reference
Critical	None defined		
Major	None defined		
Minor	AQL 4.0 percent		
	Panel width and height incorrect	Measure	10106560
	Location of unit mounting holes incorrect.	Measure	10106560

4.3.3 Relation of requirements to tests.

4.3.3.1 Performance testing. Performance testing of the quantity specified in 4.3 to determine compliance with the following characteristics shall be conducted in accordance with their corresponding test paragraph:

Characteristic	Test
Input voltages (see 3.5.1)	4.6.2.1
Current (see 3.5.2)	4.6.2.2
Input signal (see 3.5.3)	4.6.2.3

4.3.3.2 Environmental testing. Environmental testing of the quantity specified in 4.3 to determine compliance with the following characteristics shall be conducted in accordance with their corresponding test paragraphs:

Characteristic	Test
Temperature (see 3.6.1)	4.6.3.1
Altitude (see 3.6.2)	4.6.3.2
Shock (see 3.6.3)	4.6.3.3
Relative humidity (see 3.6.4)	4.6.3.4
Vibration (see 3.6.5)	4.6.3.5
Fungus resistance (see 3.6.6)	4.6.3.6

4.4 Test equipment. The test equipment shall meet the minimum requirements of the equipment listed below and shall be used as indicated in performing the tests. In the test procedures the equipment is referred to by item number. The equipment may be mounted separately or in any combination (such as consoles, panels, and multipurpose instruments).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:02Z
Check the source to verify that this is the current version before use.

Item	Description
1	AC Power Source, capable of providing 115 volts (v) ± 10 vac, 400 cps ± 20 cps, single phase.
2	Multimeter, capable of measuring the following: 0-115 vac, frequency response of 400 cps, ± 5%; 0-28 vdc, 0-100 vdc, 0-250 vdc, accuracy 1%; 0-5 ma, accuracy 1%; 0-2 amperes, accuracy 5%; ohmmeter range capable of measuring 0-100 megohms.
3	DC Power Supply; input, 105-125 vac, 50-400 cps, 330 watts; output, 250 vdc, 0-200 ma; regulation, line less than 0.15%, load less than 0.25%.
4	DC Power Supply (same as item 3).
5	DC Power Supply; input, 105-125 vac, 50-400 cps, 300 watts; output, 100 vdc, 0-200 ma.
6	DC Power Supply; input, 105-125 vac, 50-400 cps, 120 watts; output, 100 vdc, 0-100 ma.
7	DC Power Supply; input, 105-125 vac, 50-400 cps; output, 5 to 36 vdc, continuously adjustable, 0 to 15 amperes; regulation, ± 0.25% against line change, ± 0.5% against load change.
8	Switch; toggle, single pole-single throw, spring loaded, normal off, 3 amperes at 125v.
9	Switch (same as item 8).
10	Transformer, filament, 6.3 volts centertap, 2 amperes, root-mean-square test voltage 1500.
11	Lamp, general-purpose miniature, bayonet, 28 volts, .07 amperes.
12	Lamp, NE51, 105-125 volts.
13	Resistor, 12.4k ohms, 2 watts, 5%.
14	Resistor, 18.7k ohms, 2 watts, 5%.
15	Resistor, 100k ohms, 2 watts, 5%.
16	Resistor, 15k ohms, 1 watt, 5%.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:02Z
Check the source to verify that this is the current version before use.

Item	Description
17	Resistor, 1 megohm, 1 watt, 5%.
18	Resistor (same as item 17).
19	Resistor (same as item 17).
20	Resistor, 47k ohms, 2 watts, 5%.
21	Resistor (same as item 20).
22	Resistor, 2200 ohms, ½ watt, 5%.
23	Relay, four pole-double throw, dc resistance 10,000 ohms ± 10% at 25°C, continuous duty, 3.5 watts, maximum pull-in current 8.6 ma dc, minimum drop-out current 3.6 ma dc.
24	Diode, IN 457.
25	Tube, electron, 12 AT7WA.
26	Tube, electron, 12 AT7WA.
27	Capacitor, 0.1 mfd ± 5%, 400 vdc.
28	Capacitor (same as item 27).
29	Capacitor, 1.0 mfd ± 5%, 400 vdc.

4.5 Test setup. The test setup shown in figure 1 shall be used as a guide in conducting the tests specified in 4.6.2 for the unit under test. In the test setup and procedures, the terminals referenced are indicated on Electrical Schematic Drawing 10106560.

4.6 Test methods and procedures. Tests specified in 4.6.1 shall be performed prior to application of power. The sequence of tests specified in 4.6.2 shall be as indicated.

4.6.1 Electrical.

4.6.1.1 Ground potential. All external metallic parts shall be measured to terminal J1-3 with item 2 to determine compliance with 3.4.1.

4.6.1.2 Circuitry resistance. A circuitry resistance check of the test set shall be made, using item 2, to determine conformance to the requirements specified in 3.4.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:02Z
Check the source to verify that this is the current version before use.

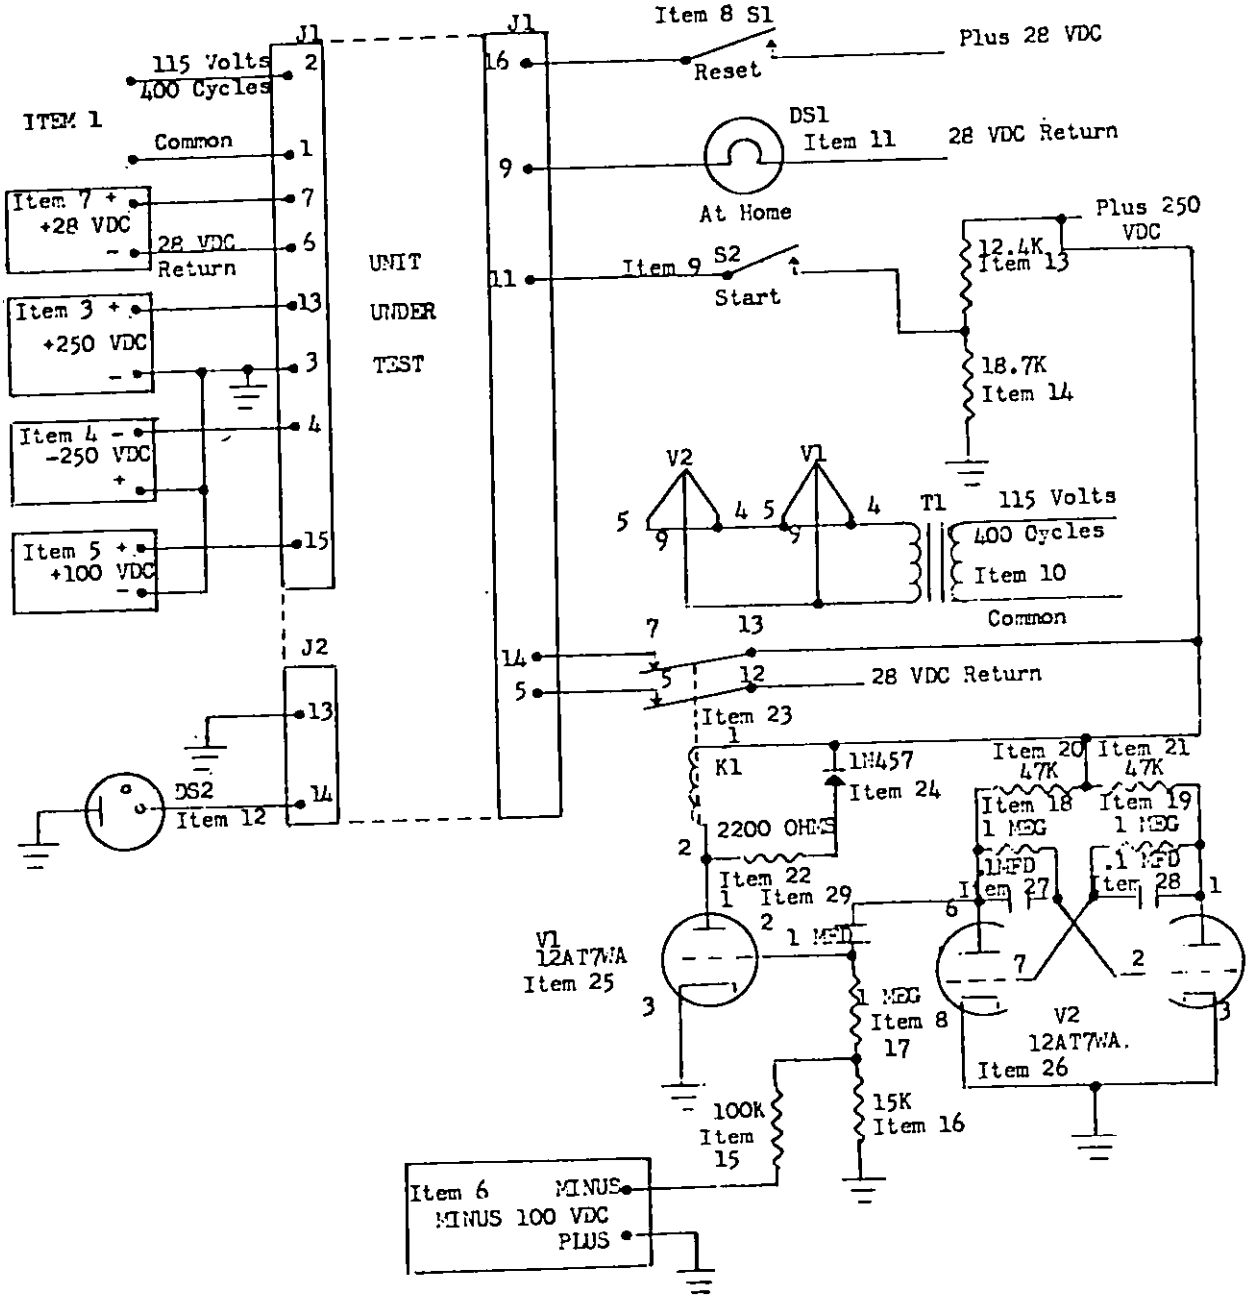


FIGURE 1.

Test setup

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:02Z
Check the source to verify that this is the current version before use.

4.6.1.3 Dielectric strength. The test set shall be tested in accordance with MIL-STD-202, method 301 and shall conform to the requirements specified in 3.4.3.

4.6.1.4 Insulation resistance. Immediately after satisfactorily withstanding the test for dielectric strength, the test set shall be given the insulation resistance test in accordance with MIL-STD-202, method 302, condition "A" and shall conform to the requirements specified in 3.4.4.

4.6.2 Performance.

4.6.2.1 Input voltages. With test items connected as specified in 4.5, the input voltages to the test set shall be measured in accordance with Table I, using item 2, to determine compliance with 3.5.1.

4.6.2.2 Current. With test items connected as specified in 4.5, the input current to the test set shall be measured in accordance with Table I, using item 2 to determine compliance with 3.5.2.

4.6.2.3 Input signal (150 vdc). (See 3.5.3).

4.6.2.3.1 Switch positions 1 and 2. Set the stepping switch first to position 1 and then to position 2. Measure the plate voltage of tubes V4 and V5, using item 2, to determine compliance with 3.5.3.1.

4.6.2.3.2 Switch positions 3 and 4. Set the stepping switch first to position 3 and then to position 4, using item 2 to determine compliance with 3.5.3.2.

4.6.2.3.3 Switch positions 5 through 25. Using item 9, set the stepping switch to positions as specified in Table II and as shown on Electrical Schematic Drawing 10106560. Using item 2, determine compliance with 3.5.3.3.

4.6.3 Environmental.

4.6.3.1 Temperature. The operating and nonoperating temperature tests shall be performed in accordance with the high and low temperature tests of MIL-STD-810, methods 501.1. and 502.1 with the exception that the extremes of operating and nonoperating temperatures and the periods of exposure to which the unit shall be subjected shall be as specified in 3.6.1.

4.6.3.2 Altitude. The unit shall be tested in accordance with the temperature-altitude test of MIL-STD-810, method 504.1. The altitude shall be as specified in 3.6.2, with the unit non-operating for the 25,000-foot test. The temperature shall be within 5 degrees C of the extremes specified in 3.6.1. Upon conclusion of the altitude tests, the unit shall operate satisfactorily.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:02Z
Check the source to verify that this is the current version before use.

4.6.3.3 Shock. Tilt the unit, nonoperating, up through an angle of 30 degrees or six inches, whichever is less, using one edge of the unit as an axis, and permit the unit to drop back freely to the horizontal position on a 2-inch-thick hardwood surface. Repeat using other practicable edges of the same horizontal face as axes, for a total of four drops. The unit shall conform to the requirements as specified in 3.6.3 following the series of shock tests.

4.6.3.4 Relative humidity. The unit shall be tested in accordance with the humidity tests of MIL-STD-810, Method 507.1 except that the relative humidity and temperature shall be as specified in 3.6.4.

4.6.3.5 Vibration. The unit shall be mounted, not operating, on the vibration test facility to simulate normal mounting. Conduct resonance search on the unit from 10 to 300 cps for a minimum period of 30 minutes along each perpendicular axis at the following vibration accelerations:

a. Plus and minus 2.5 g from 10 to 36 cps.

b. 0.036 inch double amplitude from 36 to 46 cps.

c. Plus or minus 4.0 g from 46 to 300 cps.

Vibrate the equipment at the 2 major resonant frequencies noted in each plane for 15 minutes at each frequency. Where only 1 major resonant frequency is found, vibrate at that frequency for 15 minutes; the remaining time, up to 30 minutes total time in each plane, shall be spent in continued cycling. Where no major resonant frequencies are found, the total time up to 30 minutes in each plane, shall be spent in continued cycling. At completion of vibration, visually inspect and test the equipment for satisfactory operation. (See 3.6.5)

4.6.3.6 Fungus resistance. The unit shall be tested in accordance with the fungus test of MIL-STD-810, Method 508.1 except that no evidence of fungus growth shall be present upon conclusion of the tests. (See 3.6.6.)

4.7 Preservation, packing, unitization, and marking. Preservation, packing, unitization and marking shall be inspected to insure compliance with the provisions set forth in the packaging data sheet.

5. PACKAGING

5.1 Preservation, packing, unitization, and marking - Level A or B (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:02Z
Check the source to verify that this is the current version before use.

5.1.1 Level A or B. Preservation, packing, unitization, and marking shall be in accordance with packaging data sheet APN 10106560 and specifications referenced therein.

6. NOTES

6.1 Intended use. The fire control circuits test set is intended to be used to test certain circuits on a programmed basis as a part of the Battery Control Central of the Hawk Missile System.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.

b. Whether a first article sample is required. (See 3.1.)

c. Where first article sample tests are to be performed. (See 4.2.)

d. Inspection level, if other than specified. (See 4.3.)

e. Performance characteristics which are not to be tested under environmental test conditions, if any. (See 4.6.2 and 4.6.3.)

f. Selection of applicable levels of preservation, packing, unitization, and marking. (See 5.1.)

g. Applicable stock numbers.

6.3 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Army-MI

Review Activity:
Air Force-99

Preparing Activity:
Army-MI

Project No. 4935-A046

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:02Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of *military standardization documents* are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give *proposed wording changes* which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. *Comments submitted on this form* do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Missile Command
ATTN: AMSMI-EDS
Redstone Arsenal, AL 35898-5270

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:02Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-T-46835A	TEST SET, FIRE CONTROL CIRCUITS

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:02Z
Check the source to verify that this is the current version before use.