
FED. SUP CLASS
6685

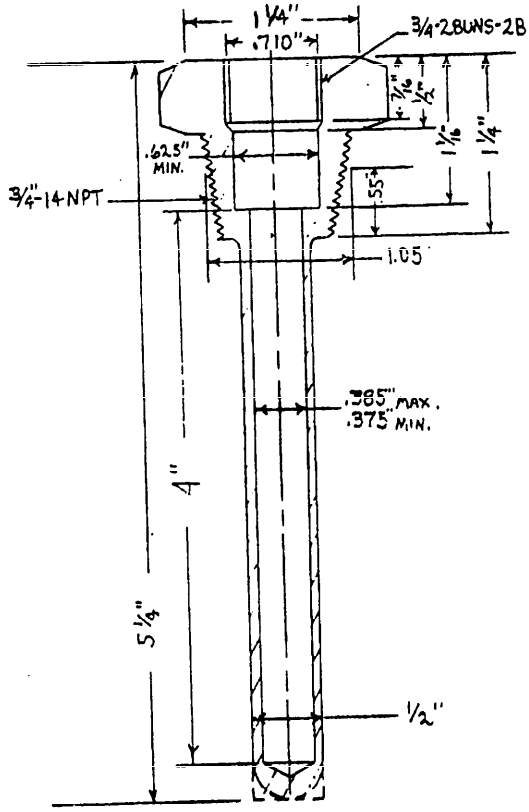

Ordering data (to be filled by the procuring activity).-
Pressure rating.
Material.
Quantity.

Intended use.- These wells are to be used for replacement purposes only; they shall not be used on new construction.
Bimetallic thermometers (MIL-T-24099).
Liquid-in-glass thermometers (MIL-T-24103).
Services (see Drawing 810-1385917).

Quality assurance.-
See applicable specification (MIL-T-24099, MIL-T-24103).

Well markings (electro-chemically or vibro-tool etched on top of the well).-
Material.
Heat number.
Pressure rating.

Tests (as applicable).-
Hydrostatically test bronze wells to 1,200 psi external pressure and steel, copper-nickel or nickel-copper wells to 9,000 psi external pressure.

Procurement document (as applicable).-
MIL-T-24099 (Bimetallic thermometers).
MIL-T-24103 (Liquid-in-glass thermometers).

Notes: 1. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
2. Referenced documents shall be of the issue in effect on date of invitation for bid.

APPROVED 30 OCT 1964 REVISED

Project 6685-N063SH

P.A. SH Other Cust	TITLE THREE-EIGHTHS INCH THERMOMETER WELL, 4-INCH INSERTION LENGTH, 3/4 INCH NPT THREAD CONNECTION	MILITARY STANDARD MS18140(SHIPS)
Procurement Specification See above	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 57 672N LIMITED COORDINATION PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This standard has been approved by the Bureau of Ships, Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:15Z
Check the source to verify that this is the current version before use.