USER SYMBOLS

REVIEWER SYMBOLS:
ARMY - ME
USAF - 82
DLA - IS

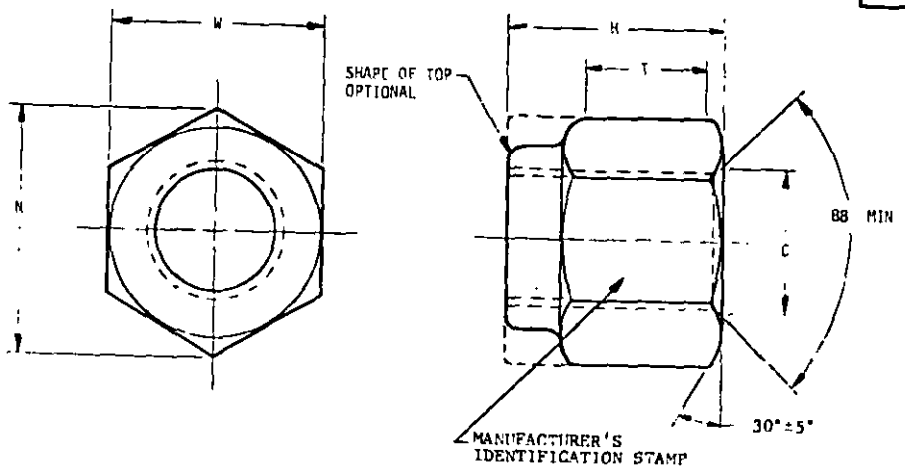


TABLE I. NUT DIMENSIONS AND STRENGTHS

	DASH NO.	THREAD MIL-S-8879	C ±.020	H MAX	H MIN	N MIN	T MIN	W MAX	W MIN	AXIAL STRENGTH LBS MIN	WEIGHT LBS/100 MAX
	1032	10-32UNJF-3B	.210	.250	.202	.413	.085	.376	.367	2,460	0.64
	428	1/4-28UNJF-3B	.273	.328	.280	.488	.116	.439	.430	4,580	1.08
	524	5/16-24UNJF-3B	.336	.360	.312	.557	.123	.502	.492	7,390	1.56
	624	3/8-24UNJF-3B	.398	.469		.628	.153	.564	.553	11,450	2.28
(a)	~~720~~	7/16-20UNJF-3B	.467	.469	.421	~~.698~~	.178	~~.627~~	~~.615~~	15,450	3.52
	720A					.773		.690	.679		
	820	1/2-20UNJF-3B	.531	.610	.562	.840	.221	.752	.741	21,110	4.92
	918	9/16-18UNJF-3B	.594	.704	.656	.982	.243	.877	.865	26,810	7.68
	1018	5/8-18UNJF-3B	.656	.766	.718	1.051	.274	.940	.928	34,130	9.48
	1216	3/4-16UNJF-3B	.787	.891	.843	1.191	.316	1.064	1.052	50,020	13.25
	1414	7/8-14UNJF-3B	.918	1.016	.968	1.403	.570	1.252	1.239	68,440	23.40
	1612	1-12UNJF-3B									
(a)	~~1614~~	~~1-14 NJC-3B~~	1.044	1.141	1.093	1.615	.635	1.440	1.427	90,000	31.02

(a) INACTIVE FOR DESIGN AFTER 17 NOV 1967.

REQUIREMENTS:

(E) 1. MATERIAL: HEAT RESISTANT AND CORROSION RESISTANT STEEL IN ACCORDANCE WITH AMS 5642 (UNS S34720, S34723), AMS 5646 (UNS S34700), AMS 5732 (UNS S66286), OR AMS 5737 (UNS S66286).

2. SURFACE COATING: SILVER PLATE IN ACCORDANCE WITH AMS 2410, PLATE THICKNESS ON EXTERNAL SURFACE SHALL NOT BE LESS THAN 0.0002 INCH. THREADS SHALL SHOW COMPLETE COVERAGE BUT THICKNESS REQUIREMENTS ON THREADS ARE WAIVED.

3. SURFACE TEXTURE: SURFACE TEXTURE IN ACCORDANCE WITH ANSI B46.1. UNLESS OTHERWISE SPECIFIED SURFACE ROUGHNESS SHALL NOT BE GREATER THAN Ra 125

(E) DENOTES CHANGES

APPROVED 29 FEB 52 REVISED (D) 11 APR 83 (E) 22 AUG 86

DISTRIBUTION STATEMENT A: APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.
This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

AMSC N/A

P.A. NAVY — AS Other Cust USAF-99 ARMY-AV	(E)	TITLE: NUT, SELF LOCKING, HEXAGON, 1200°F, 125 KSI FTU
PROCUREMENT SPECIFICATION: MIL-N-7873		SUPERSEDES:

MILITARY STANDARD
MS 20500
SHEET 1 OF 2

DD FORM 1 MAR 72 672-1 (Coordinated)

PROJECT NO. 5310-1524

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:23Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5310

NOTES:

1. THREADS IN ACCORDANCE WITH MIL-S-8879.
2. DIMENSIONS ACROSS FLATS INCLUDE DEFORMATION OF SELF-LOCKING DEVICE.
3. THESE NUTS SHALL BE USED IN ACCORDANCE WITH MS33588
4. UNLESS OTHERWISE SPECIFIED DIMENSIONS IN INCHES.
5. BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS.
6. MS20500-720A ITEMS CAN UNIVERSALLY REPLACE THE INACTIVE MS20500-720 ITEMS BUT THE INACTIVE MS20500-720 ITEMS CANNOT ALWAYS REPLACE THE SUPERSEDING MS20500-720A ITEMS.
7. EXAMPLE OF PART NUMBER:

   MS20500 -428 = NUT, SELF-LOCKING, 1/4-28, HEAT RESISTANT AND CRES NUT, SILVER PLATED

   -428 — SIZE DASH NO. (SEE TABLE I)

   MS20500 — MILITARY STANDARD NUMBER

8. QUALIFIED PRODUCTS: ONLY NUTS FOR WHICH THERE ARE QUALIFIED PRODUCTS LISTED ON QPL-7973 SHALL BE USED FOR NEW DESIGN.

(E) ~~9. CERTAIN PROVISIONS TO APPLY TO THE CROSS FLATS DIMENSION OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ABC A1R STD 17/2. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIAN WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICE SO THAT APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL AGREEMENT CONCERNED.~~

10. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
11. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

APPROVED 29 FEB 52 REVISED (E) FOR CHANGES SEE SHEETS 1 & 2

USER SYMBOLS:

REVIEWER SYMBOLS:
ARMY - ME
USAF - RP
NAVY - AS

Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY — AS Other Cust USAF-99 ARMY-AV	(E)	TITLE: NUT, SELF-LOCKING, HEXAGON, 1200°F, 125 KSI FTU	MILITARY STANDARD MS 20500
PROCUREMENT SPECIFICATION MIL-N-7873		SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO. 23008

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:23Z
Check the source to verify that this is the current version before use.