

User Activities

Review Activities.
DLA - IS


This military standard is approved by the Aeronautical Systems Division, Department of the Air Force and shall be used by that activity All other military activities are required to employ this standard where suitable

FED SUP CLASS
5355

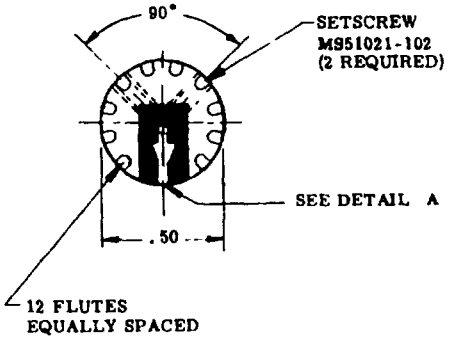

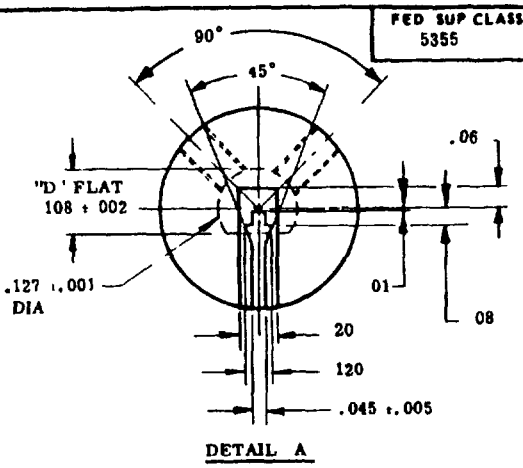

DETAIL A



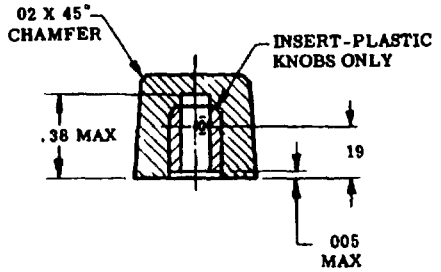


TABLE I. MS dash numbers.

MS21382 - 0 1 B N

SERIES	SHAFT DIA	COLOR-KNOB	INDICIA
0 - Plastic, non-illuminated	1 - 125 Round	N - Gray with black 1/ indicia border	N - White 1/ Round or "D" Flat as shown
1 - Plastic, illuminated	2 - 125 "D" Flat	B - Black	B - Black Round or "D" Flat as shown
2 - Aluminum		G - Gray	C - White "D" Flat opposite to that shown
		M - Metal, natural	

1/ When both "N" options (COLOR-KNOB and INDICIA) are selected, omit both "N" codes from the MS dash number

(E) Entire standard revised

APPROVED 11 MAY 1973 REVISED (E)

P A 11 Other Cust	TITLE KNOB-ROUND, ILLUMINATED AND NON-ILLUMINATED, SMALL	MILITARY STANDARD MS21382(USAF)
PROCUREMENT SPECIFICATION MIL-K-25049	SUPERSEDES	SHEET 1 OF 2

DD FORM 1 MAR 72 672-1 (Limited Coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5355-F040

PLATE NO 23065

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:37Z
Check the source to verify that this is the current version before use.

User Activities

Review Activities:
DLA - IS

This military standard is approved by the Aeronautical Systems Division, Department of the Air Force and shall be used by that activity. All other military activities are required to employ this standard where suitable

FED SUP CLASS
5355

METRIC EQUIVALENTS

INCHES	MM	INCHES	MM
.001	03	108	2.74
.002	.05	.120	2 56
.005	13	.127	3 22
.01	25	.19	4 83
.02	.51	20	5.08
.045	1.14	38	9 65
.06	1 52	.44	11.18
.08	2.03	50	12 70

NOTES

1. Dimensions. In inches.
2. Tolerances. Unless otherwise specified, tolerances are ±.010 (25 mm) for three place decimals, ±.02 (51 mm) for two place decimals, and ± 0° 30' on angles
3. Weight. .15 ounces maximum
4. Material. Insert· Brass in accordance with QQ-B-626
   Knob Thermoplastic or Aluminum alloy
5. Finish. Insert Nickle plate in accordance with QQ-N-290, grade G, class 2
   Knob Bottom surface of illuminated knobs shall have no coating and shall be polished
6. Color. Unless otherwise specified, colors shall be in accordance with FED-STD-595

   Knob Gray lusterless, color number 36231
   Black lusterless, color number 37038 for anodized.
   Metal, natural-anodize in accordance with MIL-A-8625

   Indicia White lusterless, color number 37875.
   Reflection may be reduced to 60% minimum
   Markings shall meet a daylight contrast of 9 minimum
   Black lusterless, color number 37038.

   Indicia border Black lusterless, color number 37038.

7. For design feature purposes, this standard takes precedence over procurement documents referenced herein
8. Referenced documents shall be of the issue in effect on date of invitations for bids, or request for proposal, except that referenced adopted industry documents shall give the date of the issue adopted
9. Metric equivalents (to the nearest .01 mm) are given for information only and are based on 1 inch = 25 4 mm

APPROVED 11 MAY 1973 REVISED (E) For changes see sheet 1

P.A 11 Other Cust	TITLE KNOB-ROUND, ILLUMINATED AND NON-ILLUMINATED, SMALL	MILITARY STANDARD MS21382(USAF)
PROCUREMENT SPECIFICATION MIL-K-25049	SUPERSEDES	SHEET 2 OF 2

DD FORM 1 MAR 72 672-1 (Limited Coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE PLATE NO 23085

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:37Z
Check the source to verify that this is the current version before use.