
NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP CLASS
5310

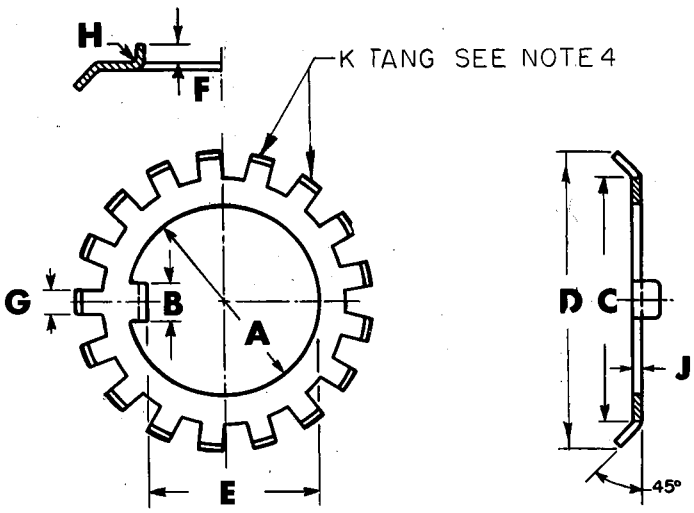

DASH NO.	SHAFT THREAD DIAM,	A MIN	A MAX	B MIN	B MAX	C +.020 −.000	D +.000 −.030	E +.020 −.000	F MIN	F MAX	G MIN	G MAX	H +.010 −.000	J MIN	J MAX	K NO. OF TANGS	EST WT (lb)
- 1	1/2	.515	.530	.110	.120	.859	1.156	.443	.062	.094	.084	.104	.016	.036	.044	9	.007
- 2	9/16	.578	.593	.110	.120	.922	1.250	.505	.062	.094	.084	.104	.016	.036	.044	11	.008
- 3	5/8	.641	.656	.110	.120	.984	1.312	.567	.062	.094	.084	.104	.016	.036	.044	11	.008
- 4	11/16	.708	.723	.110	.120	1.125	1.453	.630	.062	.094	.084	.104	.016	.036	.044	11	.010
- 5	3/4	.770	.785	.156	.176	1.203	1.578	.677	.062	.094	.146	.166	.016	.036	.044	13	.015
- 6	13/16	.832	.852	.156	.176	1.281	1.656	.739	.094	.125	.146	.166	.016	.046	.054	13	.018
- 7	7/8	.895	.915	.156	.176	1.344	1.719	.802	.094	.125	.146	.166	.016	.046	.054	13	.019
- 8	15/16	.958	.978	.156	.176	1.406	1.781	.864	.094	.125	.146	.166	.016	.046	.054	13	.020
- 9	1-	1.020	1.040	.156	.176	1.469	1.891	.927	.094	.125	.146	.166	.016	.046	.054	13	.021
-10	1- 1/16	1.082	1.102	.156	.176	1.562	1.984	.989	.094	.125	.146	.166	.031	.046	.054	15	.024
-11	1- 1/8	1.145	1.165	.156	.176	1.625	2.047	1.052	.094	.125	.146	.166	.031	.046	.054	15	.025
-12	1- 3/16	1.208	1.228	.156	.176	1.688	2.109	1.114	.094	.125	.146	.166	.031	.046	.054	15	.025
-13	1- 1/4	1.270	1.290	.156	.176	1.750	2.172	1.177	.094	.125	.146	.166	.031	.046	.054	15	.026
-14	1- 5/16	1.332	1.352	.156	.176	1.812	2.234	1.239	.094	.125	.146	.166	.031	.046	.054	15	.027
-15	1- 3/8	1.395	1.415	.156	.176	1.875	2.297	1.302	.094	.125	.146	.166	.031	.046	.054	15	.027
-16	1- 7/16	1.458	1.478	.219	.239	1.938	2.344	1.349	.094	.125	.204	.234	.031	.058	.068	15	.041
-17	1- 1/2	1.520	1.540	.219	.239	2.000	2.406	1.411	.094	.125	.204	.234	.031	.058	.068	15	.043
-18	1- 5/8	1.650	1.675	.219	.239	2.125	2.562	1.536	.125	.156	.204	.234	.031	.058	.068	15	.045
-19	1- 3/4	1.775	1.800	.219	.239	2.281	2.719	1.661	.125	.156	.204	.234	.031	.058	.068	17	.052
-20	1- 7/8	1.900	1.925	.219	.239	2.406	2.844	1.786	.125	.156	.204	.234	.031	.058	.068	17	.053
-21	2-	2.025	2.050	.219	.239	2.531	2.969	1.911	.125	.156	.204	.234	.031	.058	.068	17	.055
-22	2- 1/8	2.150	2.175	.219	.239	2.656	3.109	2.036	.125	.156	.204	.234	.031	.058	.068	17	.056
-23	2- 1/4	2.281	2.306	.219	.239	2.781	3.234	2.161	.125	.156	.204	.234	.047	.058	.068	17	.057
-24	2- 3/8	2.406	2.431	.219	.239	2.906	3.359	2.286	.125	.156	.204	.234	.047	.058	.068	17	.059
-25	2- 1/2	2.531	2.556	.219	.239	3.031	3.484	2.411	.125	.156	.204	.234	.047	.058	.068	17	.060

MATERIAL: ALLOY STEEL; FEDERAL STANDARD NO. 66, STEEL NO. 4130.

FINISH: PHOSPHATE COATING, IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.

NOTES:

(1) DIMENSIONS ARE IN INCHES.

(2) BREAK SHARP EDGES (.003 TO .015 INCH.)

(3) DIMENSION "C" SHALL BE CONCENTRIC WITH DIAMETER "A", WITHIN .010 FULL INDICATOR READING.

(4) TANGS "K" SHALL BE EQUALLY SPACED. EACH TANG SHALL BE LOCATED WITHIN .010 OF TRUE POSITION. AXIS OF TANG GROUP MAY VARY FREELY IN RELATION TO THE INNER KEY.

(5) THE "MS" PART NUMBER CONSISTS OF THE MS NUMBER, PLUS THE DASH NUMBER. EXAMPLE: MS -6.

(6) REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON THE DATE OF INVITATION FOR BID.

(7) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

(8) THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

APPROVED 1 Feb 61 REVISED

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. A - ORD Other Cust N - WEP AF - ARD	TITLE WASHER, KEY-BENT TAB, GENERAL PURPOSE	MILITARY STANDARD MS 27112
PROCUREMENT SPECIFICATION MIL-W-21338	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 57 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 20260-23T15:16Z
Check the source to verify that this is the current version before use.