
FED. SUP CLASS
6260

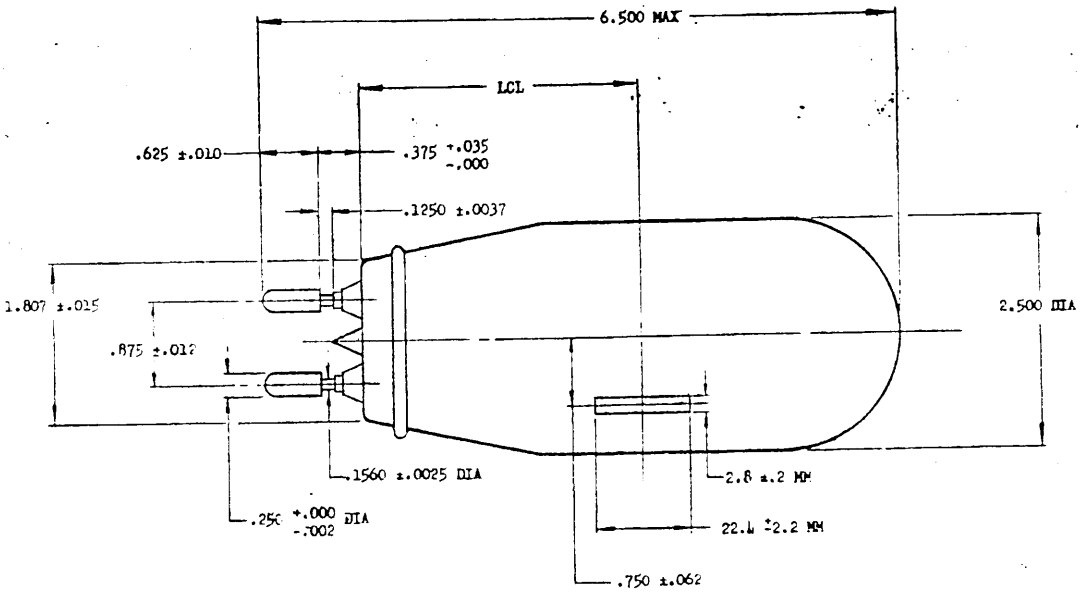

DASH NO.	INITIAL WATTS ± 30	RATED AMPERES	RATED VOLTS	RATED INITIAL LUMENS (NOMINAL)	INITIAL EFFICIENCY (LPW) ±2	FILAMENT TYPE	AVERAGE LIFE (HRS)	FINISH	LIGHT CENTER LENGTH (LCL)
-1	420	35	12	8600	20.5	C-8	1000	CLEAR	2.500

DIMENSIONS IN INCHES, EXCEPT AS SPECIFIED. UNLESS OTHERWISE SPECIFIED, TOLERANCES ON INCHES: DECIMALS ±.062.
AXIAL ALIGNMENT TOLERANCE ON FILAMENT: ±.031 IN PLANES PARALLEL AND PERPENDICULAR TO PLANE OF BASE POSTS AND INCLUDING BASE AXIS.
MAXIMUM EXCURSION RADIUS OF BULB FROM BASE AXIS: 1.562.
MAXIMUM WATTAGE INCREASE DURING LIFE: 10 PERCENT.

BURNING POSITION: HORIZONTAL-FILAMENT DOWN.
ANY SUITABLE FILAMENT SUPPORTING STRUCTURE MAY BE UTILIZED. THE FILAMENT SUPPORTING STRUCTURE SHALL OBSCURE NO PORTION OF THE FILAMENT WHEN THE ANGLE BETWEEN THE LINE OF SIGHT AND THE PLANE OF THE FILAMENT IS GREATER THAN 30°.

MINIMUM MARKING: WATTS, AMPERES, BASE DIRECTION, MS PART NUMBER, MANUFACTURER'S IDENTIFICATION.

APPROVED 7 Dec 62 REVISED

P.A. USAF - AFSC Other Cust Army - CE Navy - Wep	TITLE LAMP, INCANDESCENT - T-20 BULB, MEDIUM BIPOST BASE	MILITARY STANDARD MS28933
PROCUREMENT SPECIFICATION MIL-L-6363	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:01Z
Check the source to verify that this is the current version before use.

dynamic cut through test required for initial qualification only. Test size