
FED. SUP CLASS
6140

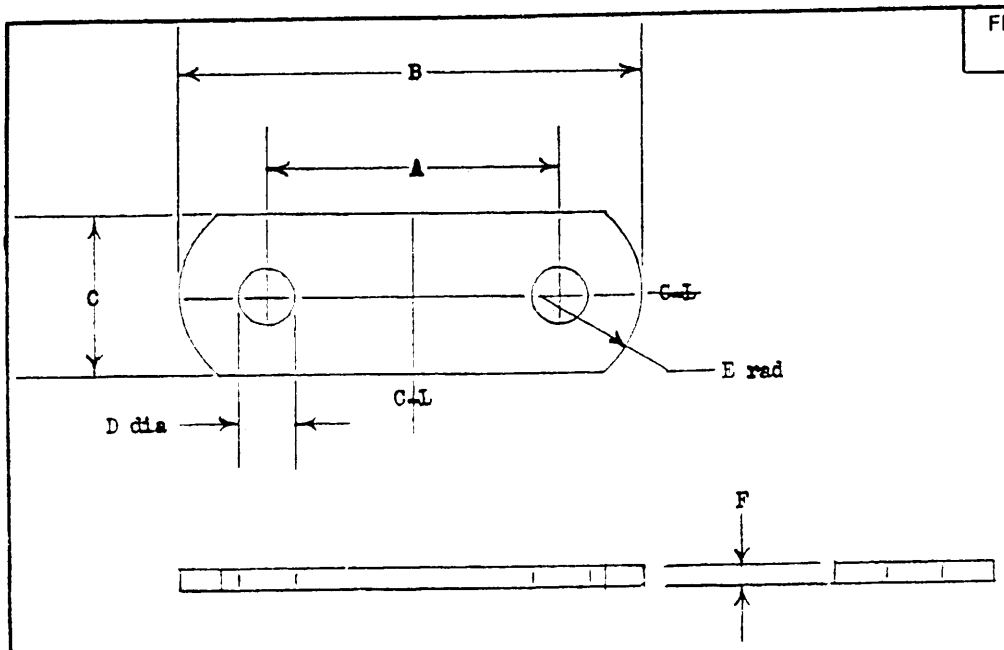

MS Part Number	A	B	C	D	E	F	Intended for Use in (ref.)
MS3347-1	.863	1.238	.500	.281	.375	.125	MS18045-64,-70
-2	.960	1.335	.500	.281	.375	.125	" "
-3	1.850	2.225	.500	.281	.375	.125	" "
-4	.812	1.312	.500	.170	.750	.062	-66,-72
-5	1.080	1.705	.500	.170	.750	.062	" "
-6	2.135	2.760	.500	.170	.750	.062	" "
-7	1.065	1.815	.750	.218	.500	.125	-68,-74
-8	1.336	2.086	.750	.218	.500	.125	" "
-9	1.510	2.260	.750	.218	.500	.125	" "
-10	1.093	1.843	.750	.218	.500	.125	-69,-75
-11	1.390	2.140	.750	.218	.500	.125	" "
-12	1.890	2.640	.750	.218	.500	.125	" "
-13	.778	1.278	.500	.281	.750	.062	-65,-71
(A) -14	.960	1.460	.500	.281	.750	.062	" "
-15	2.093	2.593	.500	.281	.750	.062	" "
-16	1.320	2.070	.750	.343	.500	.125	-67,-73
(A) -17	1.550	2.300	.750	.343	.500	.125	" "
-18	2.281	3.031	.750	.343	.500	.125	" "

NOTES.

1. DIMENSIONS. All dimensions are in inches. All tolerances are ±1%.

2. MATERIAL. Each connector shall be made of copper conforming to QQ-C-502.

3. FINISH. Each connector shall be finished with a nickel plating conforming to QQ-N-290 for Type 5.

Project Number 6140-N247

APPROVED 15 Apr 68 REVISED (A) 28 Aug 1969

This standard has been approved by the Navy, and is mandatory for use by Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. Navy - AS Other Cust	TITLE CONNECTORS, INTERCELL AND CELL-TO-RECEPTACLE, BATTERY, STORAGE, HEAVY DUTY, AIRCRAFT	MILITARY STANDARD MS 3347(AS)
Procurement Specification None	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 57 672 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:02Z
Check the source to verify that this is the current version before use.