
FED. SUP CLASS
6640

USER ACTIVITIES:

REVIEWER ACTIVITIES:

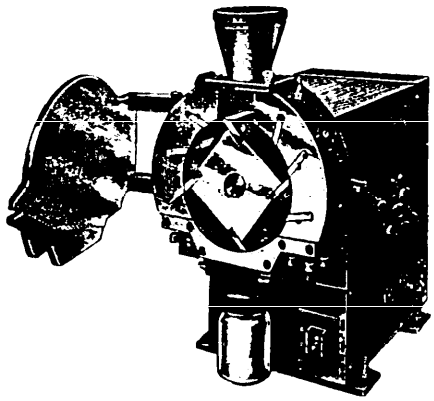

MS36210-1 as shown
MS36210-2 with floor stand

MATERIAL: Mill shall be made of steel and other material as required.

DESIGN: The overall dimensions shall be 381 mm wide x 603 mm deep x 591 mm high. Mill shall be wired for 120V, 60 Hz operation, easily convertible to 240 volt service by motor terminal change and replacement of 3-prong line plug. Mill requires 8.4 amperes on 120V and 4.2 amperes on 240 volt.

Mill shall be complete with jar chute; beaker chute, 1/2 mm, 1 mm and 2 mm sieves; three 0.47 liter Mason jars; 1 stainless steel beaker.

MS36210-2 same as -1, but includes a floor stand. Overall dimensions 483 mm wide x 610 mm deep x 997 mm high.

Unit shall be furnished with a 1/2 hp motor that will fit 241 x 368 x 254 mm chamber behind mill for driving the mill rotor counterclockwise by use of a V belt and at 400 to 800 rpm.

All electrical components shall conform to the standards of Underwriters Laboratories, Incorporated.

NOTE: Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements specified herein.

APPROVED 22 JUN 1983 REVISED

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. EA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust MS 99		MILL, MOTORIZED, LABORATORY	MS36210
Procurement Specifications NONE	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NUMBER 6640-1185
STANDARD DATE

Source: https://assist.dla.mil -- Downloaded: 202640-23T17:36Z
Check the source to verify that this is the current version before use.