
FED. SUP. CLASS.
5305

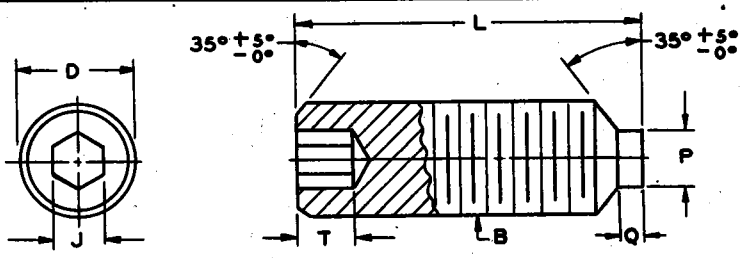

		#2 (.086)	#4 (.112)	#6 (.138)	#8 (.164)	#10 (.190)
D	NOMINAL SIZE					
B	THREADS PER INCH	64NF-3A	48NF-3A	40NF-3A	36NF-3A	32NF-3A
J	WIDTH OF SOCKET ACROSS FLAT MAX.	.0355	.051	.0635	.0791	.0947
	MIN.	.035	.050	.0625	.0781	.0937
P	DIAMETER OF POINT MAX.	.057	.075	.092	.109	.127
	MIN.	.053	.070	.087	.103	.120
Q	POINT LENGTH	.022	.028	.035	.040	.045
T	KEY ENGAGEMENT MIN.	.028	.040	.050	.062	.075

L LENGTH	TOLERANCE	DASH No.	FIIN	DASH No.	FIIN	DASH No.	FIIN	DASH No.	FIIN	DASH No.	FIIN
3/16 1/4 5/16 3/8 1/2	± 1 1/2% OF L WITH A MINIMUM OF ± .010 IN.	1* 2*		8* 9*		15* 16* 17* 18*		24* 25* 26* 27* 28*		34 35 36* 37* 38*	

		1/4	5/16	3/8	1/2	
D	NOMINAL SIZE					
B	THREADS PER INCH	28UNF-3A	24UNF-3A	24UNF-3A	20UNF-3A	
J	WIDTH OF SOCKET ACROSS FLAT MAX.	.127	.1582	.1895	.2520	
	MIN.	.125	.1562	.1875	.2500	
P	DIAMETER OF POINT MAX.	.156	.203	.250	.343	
	MIN.	.149	.195	.241	.334	
Q	POINT LENGTH	.0625	.078	.0937	.125	
T	KEY ENGAGEMENT MIN.	.100	.125	.150	.200	

L LENGTH	TOLERANCE	DASH No.	FIIN	DASH No.	FIIN	DASH No.	FIIN	DASH No.	FIIN	DASH No.	FIIN
1/4 5/16 3/8 1/2 5/8 3/4	± 1 1/2% OF L WITH A MINIMUM OF ± .010 IN.	44 45* 46 47*		53 54 55* 56*		62 63 64* 65*		71 72* 73*			

* INDICATES MANUFACTURER'S NON-STOCK PRODUCTION ITEMS.

KEY ENGAGEMENT: THESE DIMENSIONS APPLY TO SCREWS ONE DIAMETER IN LENGTH OR LONGER. FOR SCREWS SHORTER THAN ONE DIAMETER IN LENGTH, SOCKET TO BE AS DEEP AS PRACTICABLE.

MATERIAL: STEEL, HIGH-GRADE ALLOY, IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.

HARDNESS: SETSCREWS SHALL BE HARDENED BY HEAT TREATMENT TO A HARDNESS OF ROCKWELL C45 TO 53.

PROTECTIVE COATING: CADMIUM PLATED, IN ACCORDANCE WITH SPECIFICATION QQ-P-416, TYPE II, CLASS 3.
ZINC PLATED, IN ACCORDANCE WITH SPECIFICATION QQ-Z-325, TYPE II, CLASS 3.

THREADS: THE THREADS SHALL BE IN ACCORDANCE WITH SCREW-THREAD STANDARDS FOR FEDERAL SERVICES HANDBOOK H-28.

DIMENSIONS: ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

PART NUMBER: THE MS PART NUMBER CONSISTS OF THE MS NUMBER, PLUS THE DASH NUMBER. EXAMPLE: MS51042-1.

NOTES: (1) REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
(2) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

REVISED
APPROVED 7 MAY 1958

CUSTODIANS	OTHER INT.
A - ORD	A-CESIGT
N - SHIPS	N-AMCOR
AF - USAF	AF-

PROCUREMENT SPECIFICATION
FF-S-103

MILITARY STANDARD

SETSCREW, HEXAGON SOCKET, HALF-DOG POINT, ALLOY STEEL, CADMIUM OR ZINC, NF-3A AND UNF-3A

SUPERSEDES:

MS51042
51042

SHEET 1 / OF 1 /

DD FORM 1 OCT 52 672-1

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

DATE

DRAWN BY

TYPED BY

CHECKED BY

NOTES TO PRINTER: REDUCE BORDER TO 6-27/32x9-3/4. PRINT LEFT BORDER-LINE ONE INCH FROM LEFT EDGE OF 8x10-1/2 SHEET. PRINT BOTTOM BORDER LINE 3/8 INCH FROM BOTTOM EDGE OF 8x10-1/2 SHEET. SIGNATURE FORM NOT TO BE INCLUDED ON 8x10-1/2 SHEET.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:55Z
Check the source to verify that this is the current version before use.