This military standard is approved for use by all departments and agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

Review activities
Army
Navy
Air Force - 11
DSA

User activities
Army - AT, EL, MI
Navy
Army
DSA

PROCUREMENT SPECIFICATION
NONE

P.A. Air Force - 82
Other Cust
Navy - AS
Army - AV
(B)

SUPERSEDING


MILITARY STANDARD

NUT - HEX, BOSS CONNECTION, CRES

MS9100

SHEET 1 OF 1

MS9100

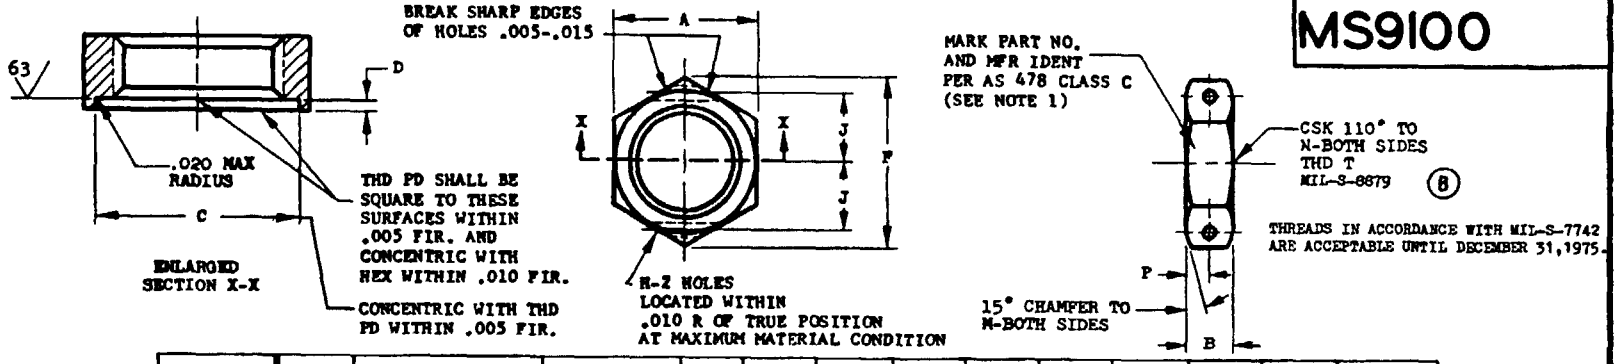

PART NO.	NOM TUBE OD	(B) THREAD T	A	B	C DIA ±.005	D ±.005	F MIN	H DIA ±.005	J BASIC	M DIA	N DIA	P	APPROX WEIGHT LB/100
MS9100-02	.125	.3125-24UNJF-3B	.553-.564	250	.483	.037	.631	.047	.240	.562	.322	.125	1.28
MS9100-03	.188	.375 -24UNJF-3B	.616-.627	.250	.546	.037	.703	.047	270	.625	.385	.125	1.50
MS9100-04	.250	.4375-20UNJF-3B	.679-.690	.281	.608	.042	.775	.047	.305	.688	448	.140	1.98
MS9100-05	.312	.500 -20UNJF-3B	.741-.752	.281	.670	.042	846	.055	.340	.750	.510	.140	2 21
MS9100-06	.375	.5625-18UNJF-3B	.803-.814	.297	.733	.042	.916	.055	.370	.812	.572	.148	2.62
MS9100-07	.438	.625 -18UNJF-3B	.865-.877	.297	.795	.042	.987	.055	.405	.875	.635	148	2.93
MS9100-08	.500	.750 -16UNJF-3B	.990-1.002	.344	.920	.042	1.130	.062	.470	1.000	760	.172	4.10
MS9100-09	.562	.8125-16UNJ-3B	1.052-1.064	.344	.983	.042	1.200	.062	.500	1.062	.822	.172	4.38
MS9100-10	625	.875 -14UNJF-3B	1.114-1.127	.391	1 045	.054	1.271	.062	.540	1.125	.885	.195	5.49
MS9100-11	.688	1.000 -12UNJF-3B	1.301-1.314	.438	1 210	.054	1.484	.070	.625	1.312	1.010	.219	6.83
MS9100-12	.750	1.0625-12UNJ-3B	1.364-1.377	.438	1.295	.054	1.556	.070	.660	1.375	1.072	.219	9 34
MS9100-14	.875	1.1875-12UNJ-3B	1.489-1.502	438	1.417	.054	1.699	.070	.725	1.500	1.198	.219	10.50
MS9100-16	1.000	1.3125-12UNJ-3B	1.614-1.627	.438	1.541	.054	1.842	.070	.790	1.625	1.322	.219	11.65
MS9100-18	1.125	1.500 -12UNJF-3B	1.800-1.814	.438	1.729	.054	2.054	.070	.890	1.812	1.510	.219	13 44
MS9100-20	1.250	1.625 -12UNJ-3B	1.926-1.940	.438	1 854	.054	2.198	.070	.960	1.938	1.635	.219	14.76
MS9100-24	1.500	1.875 -12UNJ-3B	2.176-2.190	438	2.104	054	2.483	.070	1.095	2.188	1 885	.219	17 36
MS9100-28	1.750	2.250 -12UNJ-3B	2.549-2.564	.438	2.478	.054	2.908	070	1.295	2.562	2.260	.219	21.46
MS9100-32	2.000	2.500 -12UNJ-3B	2.799-2.814	.438	2.728	.054	3.194	070	1.425	2.812	2.510	.219	24.40

1. MULTIPLE MARKING OF BAR STOCK IS PERMISSIBLE PROVIDED POSITIVE IDENTIFICATION IS SHOWN. PARTS SHALL BE MARKED BEFORE THREADING. DASH NUMBERS MAY APPEAR ON ADJACENT FLATS.
2. MATERIAL: CORROSION RESISTANT STEEL AMS5639.
3. CLEANING: FINISHED PARTS SHALL BE DEGREASED AND IMMERSED FOR NOT LESS THAN 20 MINUTES IN A SOLUTION OF NITRIC ACID. (SP GR 1.42) AND 9 VOLUMES OF WATER AT ROOM TEMPERATURE.
(B) 4. SURFACE TEXTURE: ANSI B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT HEX FACES.
5. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
6. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
7. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PROPULSION DIVISION.

FSC 5310

APPROVED 15 Oct 58 REVISED (A) 1 MAY 69 (B) 23 Oct 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:10Z
Check the source to verify that this is the current version before use.