
FSC 5306

MS9299

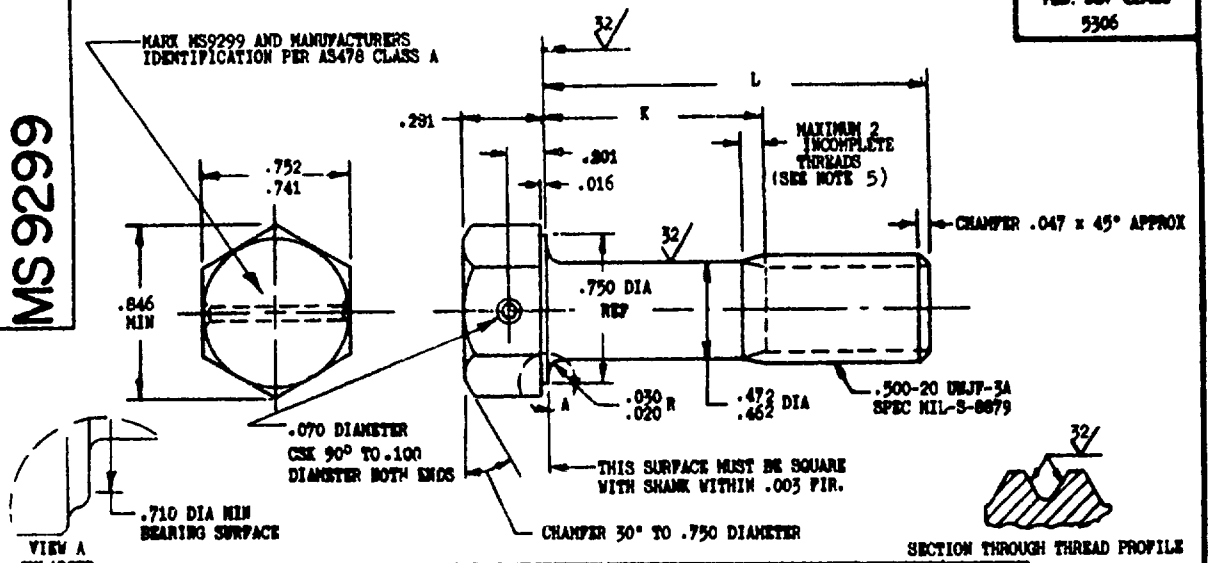

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9299-04	.812	.105-.125	7.69
MS9299-05	.875	.105-.125	7.99
MS9299-06	.938	.105-.125	8.29
MS9299-07	1.000	.105-.125	8.59
MS9299-08	1.062	.105-.125	8.90
MS9299-09	1.125	.105-.125	9.20
MS9299-10	1.188	.105-.125	9.50
MS9299-11	1.250	.105-.125	9.80
MS9299-12	1.312	.105-.125	10.11
MS9299-13	1.375	.105-.125	10.41
MS9299-14	1.438	.128-.188	10.71
MS9299-15	1.500	.190-.250	11.01
MS9299-16	1.562	.252-.312	11.31
MS9299-17	1.625	.315-.375	11.62
MS9299-18	1.688	.378-.438	11.92
MS9299-19	1.750	.440-.500	12.22
MS9299-20	1.875	.565-.625	12.82
MS9299-21	2.000	.690-.750	13.43
MS9299-22	2.125	.815-.875	14.03
MS9299-23	2.250	.940-1.000	14.64
MS9299-24	2.375	1.065-1.125	15.24
MS9299-25	2.500	1.190-1.250	15.85
MS9299-26	2.625	1.315-1.375	16.45
MS9299-27	2.750	1.440-1.500	17.05
MS9299-28	2.875	1.565-1.625	17.66
MS9299-29	3.000	1.690-1.750	18.26
MS9299-30	3.125	1.815-1.875	18.87

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9299-31	3.250	1.940-2.000	19.47
MS9299-32	3.375	2.065-2.125	20.08
MS9299-33	3.500	2.190-2.250	20.68
MS9299-34	3.625	2.315-2.375	21.28
MS9299-35	3.750	2.440-2.500	21.89
MS9299-36	3.875	2.565-2.625	22.49
MS9299-37	4.000	2.690-2.750	23.10
MS9299-38	4.125	2.815-2.875	23.70
MS9299-39	4.250	2.940-3.000	24.30
MS9299-40	4.375	3.065-3.125	24.91
MS9299-41	4.500	3.190-3.250	25.51
MS9299-42	4.625	3.315-3.375	26.12
MS9299-43	4.750	3.440-3.500	26.72
MS9299-44	4.875	3.565-3.625	27.32
MS9299-45	5.000	3.690-3.750	27.93
MS9299-46	5.125	3.815-3.875	28.53
MS9299-47	5.250	3.940-4.000	29.14
MS9299-48	5.375	4.065-4.125	29.74
MS9299-49	5.500	4.190-4.250	30.35
MS9299-50	5.625	4.315-4.375	30.95
MS9299-51	5.750	4.440-4.500	31.56
MS9299-52	5.875	4.565-4.625	32.16
MS9299-53	6.000	4.690-4.750	32.76

1. HEAD TO SHANK FILLET SHALL BE COLD ROLLED AFTER HEAT TREATMENT TO REMOVE ALL VISUAL EVIDENCE OF GRINDING OR TOOL MARKS.
2. SHANK SHALL BE STRAIGHT WITHIN .002 PER INCH OF BOLT LENGTH.
3. [illegible] CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
4. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .023 FIR.
5. INCOMPLETE THREADS NOT TO ENTER FILLET.
6. MATERIAL: STEEL AMS 6322.
7. HARDNESS: ROCKWELL C26-32.
8. FINISH: BLACK OXIDE TREATMENT AMS 2485.
9. MANUFACTURING SPECIFICATION: AMS 7452 EXCEPT HEAD MUST BE UPSET.
10. MAGNETIC PARTICLE INSPECTION PER AMS 2640.
11. SURFACE ROUGHNESS: AS 291. UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES EXCEPT HEXAGON.
12. BREAK SHARP EDGES .003-.01[illegible] UNLESS OTHERWISE SPECIFIED.
13. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±[illegible]°.
14. DO NOT USE UNASSIGNED PART NUMBERS

(A) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972.
NO SUPERSEDING STANDARD.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 24 Sept 72 REVISED (A) 26 Oct 72

P.A. USAF - 11	TITLE	MILITARY STANDARD
Other Cust Navy - AS	BOLT, MACHINE-STEEL AMS 6322, BLACK OXIDE, DRILLED, 1 HOLE, HEXAGON HEAD, .500-20 UNJF-3A	MS 9299
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 E-25-144 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This standard has been approved by the Department of the Air Force (11) and the Navy and is mandatory for use by that activity. All other military activities are required to employ the standard where suitable.

Review activities: USAF - 11 Navy - AS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:14Z
Check the source to verify that this is the current version before use.