
MS9692

FED. SUP CLASS 5306

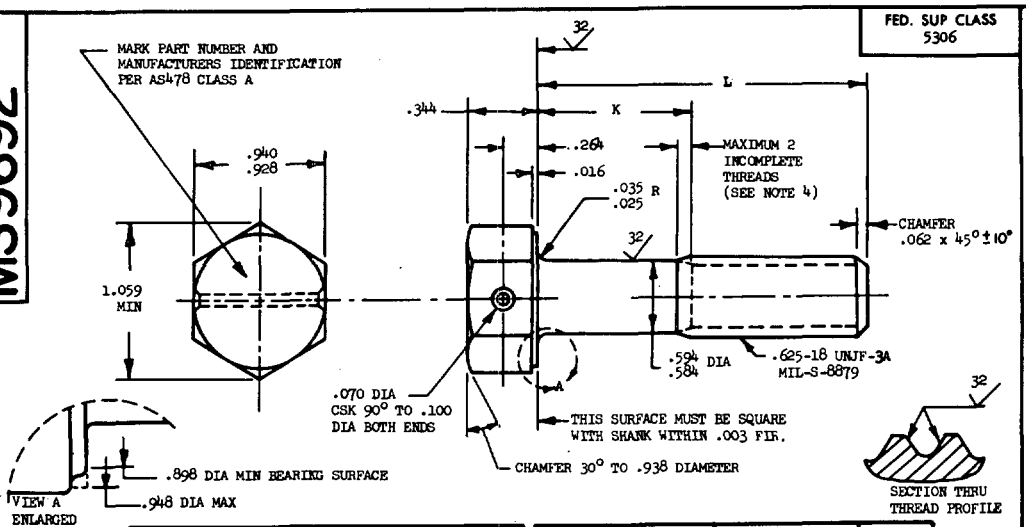

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9692-03	.938	.118- .138	14.37
MS9692-04	1.000	.118- .138	14.85
MS9692-05	1.062	.118- .138	15.33
MS9692-06	1.125	.118- .138	15.81
MS9692-07	1.188	.118- .138	16.29
MS9692-08	1.250	.118- .138	16.76
MS9692-09	1.312	.118- .138	17.24
MS9692-10	1.375	.118- .138	17.72
MS9692-11	1.438	.118- .138	18.19
MS9692-12	1.500	.118- .138	18.67
MS9692-13	1.562	.118- .138	19.14
MS9692-14	1.625	.118- .138	19.62
MS9692-15	1.688	.128- .188	20.10
MS9692-16	1.750	.190- .250	20.58
MS9692-17	1.812	.252- .312	21.06
MS9692-18	1.875	.315- .375	21.52
MS9692-19	1.938	.378- .438	22.00
MS9692-20	2.000	.440- .500	22.48
MS9692-21	2.125	.565- .625	23.44
MS9692-22	2.250	.690- .750	24.39
MS9692-23	2.375	.815- .875	25.34
MS9692-24	2.500	.940-1.000	26.29
MS9692-25	2.625	1.065-1.125	27.25
MS9692-26	2.750	1.190-1.250	28.20
MS9692-27	2.875	1.315-1.375	29.15
MS9692-28	3.000	1.440-1.500	30.11
MS9692-29	3.125	1.565-1.625	31.06
MS9692-30	3.250	1.690-1.750	32.01

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9692-31	3.375	1.815-1.875	32.97
MS9692-32	3.500	1.940-2.000	33.92
MS9692-33	3.625	2.065-2.125	34.87
MS9692-34	3.750	2.190-2.250	35.83
MS9692-35	3.875	2.315-2.375	36.78
MS9692-36	4.000	2.400-2.500	37.73
MS9692-37	4.125	2.565-2.625	38.69
MS9692-38	4.250	2.690-2.750	39.64
MS9692-39	4.375	2.815-2.875	40.60
MS9692-40	4.500	2.940-3.000	41.54
MS9692-41	4.625	3.065-3.125	42.50
MS9692-42	4.750	3.190-3.250	43.43
MS9692-43	4.875	3.315-3.375	44.40
MS9692-44	5.000	3.440-3.500	45.36
MS9692-45	5.125	3.565-3.625	46.31
MS9692-46	5.250	3.690-3.750	47.26
MS9692-47	5.375	3.815-3.875	48.22
MS9692-48	5.500	3.940-4.000	49.17
MS9692-49	5.625	4.065-4.125	50.13
MS9692-50	5.750	4.190-4.250	51.08
MS9692-51	5.875	4.315-4.375	52.03
MS9692-52	6.000	4.440-4.500	52.99

1. SHANK SHALL BE STRAIGHT WITHIN .002 TOTAL PER INCH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .028 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: STEEL AMS 6304.
6. HARDNESS: ROCKWELL C42-46.
7. FINISH: DIFFUSED NICKEL CADMIUM PLATE PER AMS 2416. DIMENSIONS SPECIFIED ARE AFTER PLATING. CONTACT POINTS PERMISSIBLE.
8. MANUFACTURING SPECIFICATION: AMS 7459.
9. MAGNETIC PARTICLE INSPECTION PER AMS 2640 BEFORE PLATING.
10. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
11. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
12. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ±5°.
13. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION.

REVISED
APPROVED 8 Jul 71

P.A. Air Force - 11 Other Cust Navy - AS	INTERNATIONAL INTEREST ASCC AIR STD 17/2	TITLE BOLT, MACHINE - HEXAGON HEAD, DRILLED, 1 HOLE, PD SHANK, STEEL AMS 6304, DIFFUSED NICKEL CADMIUM PLATE, .625-18 UNJF-3A	MILITARY STANDARD MS9692
PROCUREMENT SPECIFICATION AMS7459	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆ U. S. GOVERNMENT PRINTING OFFICE: 1971-714-157/822

This standard has been approved by the Department of Air Force and the Department of the Navy, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:22Z
Check the source to verify that this is the current version before use.