
MS9733 (ASG)

FED SUP CLASS 5306

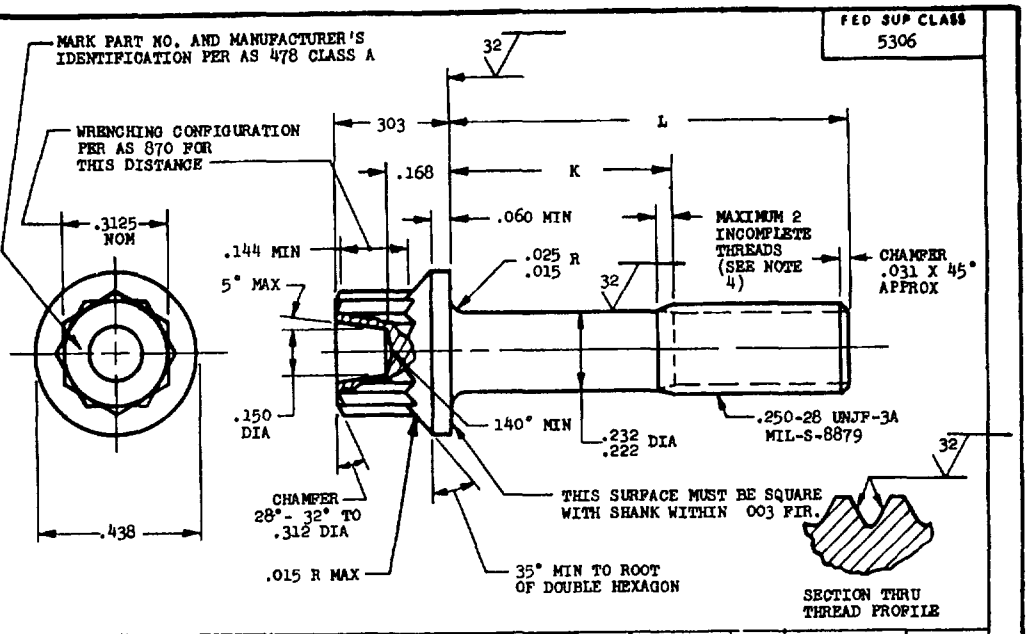

PART NO.	L	K	APPROX WEIGHT LB/100	PART NO.	L	K	APPROX WEIGHT LB/100	PART NO.	L	K	APPROX WEIGHT LB/100
MS9733-04	.375	079-.099	1.28	MS9733-25	1 688	878- .938	2.77	MS9733-46	4 125	3 315-3.375	5.53
MS9733-05	438	079-.099	1 35	MS9733-26	1 750	.940-1.000	2 84	MS9733-47	4 250	3.440-3 500	5.67
MS9733-06	500	079-.099	1.42	MS9733-27	1 812	1 002-1 062	2.91	MS9733-48	4.375	3 565-3 625	5 81
MS9733-07	562	.079-.099	1 50	MS9733-28	1 875	1.065-1 125	2.98	MS9733-49	4.500	3 690-3.750	5 96
MS9733-08	625	.079-.099	1.57	MS9733-29	2.000	1 190-1 250	3 12	MS9733-50	4.625	3 815-3 875	6 10
MS9733-09	.688	079- 099	1 64	MS9733-30	2.125	1.315-1.375	3 27	MS9733-51	4.750	3 940-4 000	6 24
MS9733-10	750	.079-.099	1 71	MS9733-31	2 250	1 440-1 500	3.41	MS9733-52	4.875	4 065-4.125	6.38
MS9733-11	.812	079- 099	1.78	MS9733-32	2.375	1 565-1 625	3 55	MS9733-53	5 000	4 190-4.250	6 52
MS9733-12	.875	079- 125	1 85	MS9733-33	2.500	1 690-1.750	3.69	MS9733-54	5.125	4.315-4.375	6.66
MS9733-13	938	128-.188	1 92	MS9733-34	2 625	1 815-1.875	3 83	MS9733-55	5 250	4 440-4 500	6 81
MS9733-14	1 000	190-.250	1 99	MS9733-35	2 750	1 940-2.000	3 97	MS9733-56	5 375	4 565-4.625	6.95
MS9733-15	1.062	252- 312	2.06	MS9733-36	2 875	2 065-2 125	4.12	MS9733-57	5 500	4 690-4 750	7 09
MS9733-16	1 125	.315- 375	2 13	MS9733-37	3 000	2 190-2.250	4 26	MS9733-58	5.625	4.815-4 875	7.23
MS9733-17	1 188	378-.438	2.20	MS9733-38	3 125	2 315-2 375	4 40	MS9733-59	5.750	4.940-5 000	7 37
MS9733-18	1 250	440- 500	2 27	MS9733-39	3.250	2 440-2.500	4.54	MS9733-60	5 875	5 065-5.125	7 51
MS9733-19	1.312	502-.562	2.34	MS9733-40	3 375	2.565-2 625	4 68	MS9733-61	6 000	5.190-5 250	7 66
MS9733-20	1 375	565-.625	2.42	MS9733-41	3.500	2 690-2.750	4 82				
MS9733-21	1.438	628- 685	2 49	MS9733-42	3.625	2 815-2 875	4.96				
MS9733-22	1.500	.690-.750	2 56	MS9733-43	3.750	2 940-3 000	5 11				
MS9733-23	1.562	.752-.812	2 63	MS9733-44	3 875	3 065-3 125	5 25				
MS9733-24	1.625	815- 875	2 70	MS9733-45	4.000	3 190-3 250	5 39				

1. SHANK SHALL BE STRAIGHT WITHIN .003 PER INCH OF BOLT LENGTH
2. THE RUNOUT OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR
3. THE RUNOUT OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .007 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL. CRES AMS 5643.
6. HARDNESS: ROCKWELL 032-38
7. MANUFACTURING SPECIFICATION AMS 7474.
8. FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
9. SURFACE TEXTURE. USAS B46.1-1962. *UNLESS OTHERWISE SPECIFIED*, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
10. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED
11. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
12. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIV.

APPROVED 3 Mar 69 REVISED

Review activities: USAF - 82, 85

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

P.A. USAF - 11 Other Cust Navy - AS	TITLE BOLT, MACHINE - DOUBLE HEXAGON EXTENDED WASHER HEAD, PD SHANK, CRES AMS 5643, 250-28 UNJF-3A	MILITARY STANDARD MS9733 (ASG)
PROCUREMENT SPECIFICATION	SUPERSEDES	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 306 - F044

☆ U. S. GOVERNMENT PRINTING OFFICE: 1968-341-518/A-5361

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:24Z
Check the source to verify that this is the current version before use.