
MS9912 (ASG)

FED. SUP CLASS 5305

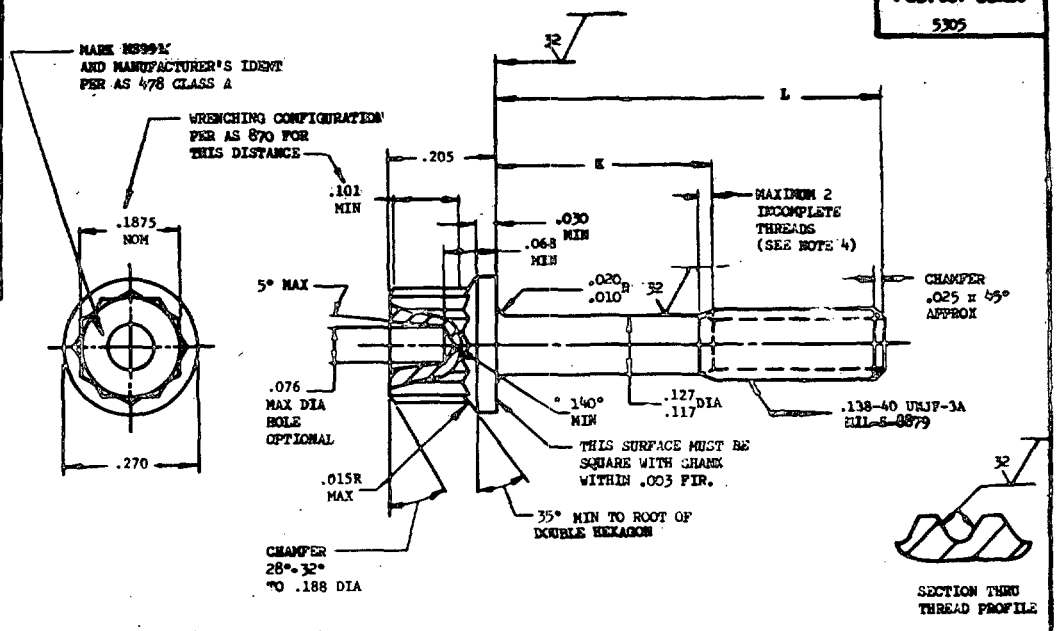

PART NO.	L	K	APPROX. WEIGHT LB/100
MS9912-02	.250	.058- .078	.283
MS9912-03	.312	.058- .078	.304
MS9912-04	.375	.058- .078	.325
MS9912-05	.438	.058- .078	.346
MS9912-06	.500	.058- .078	.367
MS9912-07	.562	.058- .078	.387
MS9912-08	.625	.058- .099	.408
MS9912-09	.688	.102- .162	.429
MS9912-10	.750	.164- .224	.449
MS9912-11	.812	.226- .286	.478
MS9912-12	.875	.289- .349	.490
MS9912-13	.938	.352- .412	.511
MS9912-14	1.000	.414- .474	.532
MS9912-15	1.062	.476- .536	.552

PART NO.	L	K	APPROX WEIGHT LB/100
MS9912-16	1.125	.539- .599	.573
MS9912-17	1.188	.602- .662	.601
MS9912-18	1.250	.664- .724	.615
MS9912-19	1.312	.726- .786	.635
MS9912-20	1.375	.789- .849	.656
MS9912-21	1.438	.852- .912	.677
MS9912-22	1.500	.914- .974	.697
MS9912-23	1.562	.976-1.036	.717
MS9912-24	1.625	1.039-1.099	.737
MS9912-25	1.688	1.102-1.162	.758
MS9912-26	1.750	1.164-1.224	.778
MS9912-27	1.812	1.226-1.286	.799
MS9912-28	1.875	1.289-1.349	.820
MS9912-29	1.938	1.352-1.412	.840
MS9912-30	2.000	1.414-1.474	.861

1. SHANK SHALL BE STRAIGHT WITHIN .003 PER INCH OF SCREW LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .004 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: STEEL AMS 6322.
6. HARDNESS: ROCKWELL C26-32.
7. FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS SPECIFIED ARE AFTER PLATING.
8. MANUFACTURING SPECIFICATION: AMS 7452 EXCEPT HEAD SHALL BE UPSET.
9. HEAD TO SHANK FILLET SHALL BE COLD WORKED.
10. MAGNETIC PARTICLE INSPECTION PER AMS 2640 AFTER PLATING.
11. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
12. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
13. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
14. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION.

P.A. USAF - 11
Other Cust
Navy - AS

TITLE
SCREW, MACHINE - DOUBLE HEXAGON EXTENDED WASHER HEAD, PD SHANK, STEEL AMS 6322, CADMIUM PLATED, .138-40 UNJF-3A

MILITARY STANDARD
MS9912 (ASG)

PROCUREMENT SPECIFICATION
N/A

SUPERSEDING

SHEET 1 OF 1

DD FORM 672-1 (Digital conversion)
ASD use only

Review activities:
USAF - 82, 85

This military standard is approved by the Department of the Air Force and the Bureau of Naval Weapons and is mandatory for use by these activities. All other military activities are required to employ this standard upon notice.

APPROVED 15 Aug 69 REVISED

☆U.S. GOVERNMENT PRINTING OFFICE: 1969-393-065/S1749

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:27Z
Check the source to verify that this is the current version before use.