MILITARY SPECIFICATION

SIMULATOR, RADAR SIGNAL SM-697/UPQ-5

This specification has been approved by the
Naval Air Systems Command, Department of the Navy.

1. SCOPE

1.1 Scope - The equipment covered by this specification shall be for intermediate (shop) use and shall generate simulated radar signals for fault isolation of the Display Set, Mission Recorder AN/UPQ-5 to a specific SRA.

1.2 Classification - The equipment covered by this specification shall consist of the following item:

Drawing or Model Number	Nomenclature	Reference Paragraph
SM-697/UPQ-5	Simulator, Radar Signal	NA

2. APPLICABLE DOCUMENTS

2.1 General - The following documents of the issue in effect on the date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein

SPECIFICATIONS

Military

MIL-E-17555	Electronic and Electrical Equipment and Associated Repair Parts, Preparation for Delivery of
MIL-T-18303	Test Procedures; Preproduction and Inspection, for Aircraft Electronic Equipment, Format for
MIL-N-18307	Nomenclature and Nameplates for Aeronautical Electronic and Associated Equipment
MIL-T-21200	Test Equipment for Use with Electronic and Electrical Equipment, General Specification for

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:33Z
Check the source to verify that this is the current version before use.

MIL-C-21097	Connector, Electrical, Printed Wiring Board, General Purpose, General Specification for

STANDARDS

Military

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-454	Standard General Requirements for Electronic Equipment
MIL-STD-461	Electromagnetic Interference Characteristics Requirements for Equipment
MIL-STD-749	Preparation and Submission of Data for Approval of Nonstandard Electronic Parts
MIL-STD-781	Reliability Tests, Exponential Distribution
MIL-STD-794	Parts and Equipment, Procedures for Packing and Packaging of
MS24264	Connector, Receptacle, Electrical Flange Mount, Miniature

Naval Air Systems Command

AR-10	Maintainability of Avionics Equipment and Systems, General Requirement for

2.1.1 Availability of Documents -

(1) When requesting specifications, standards, drawings, and publications, refer to both title and number. Copies of this specification and applicable specifications required by contractors in connection with specific procurement functions may be obtained upon application to the Commanding Officer, Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, Pennsylvania 19120

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:33Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Testing - This specification makes provision for testing (see 4.).

3.2 Materials, Parts, and Processes - The materials, parts, and processes shall be in accordance with MIL-T-21200.

3.2.1 Selection of Parts, Materials and Processes - Except as specified herein, MIL-T-21200 shall apply for the selection of parts, materials and processes.

3.2.2 Approval of Nonstandard Parts and Materials - Approval for the use of nonstandard parts and materials (including microelectronic devices) shall be in accordance with MIL-T-21200. Nonstandard parts and materials data shall be in accordance with Step I and Step II only of MIL-STD-749.

3.3 Design and Construction - Except as specified herein, the design and construction shall be in accordance with MIL-T-21200.

3.3.1 Total Weight - The total weight of the equipment shall be a minimum consistant with good design and shall not exceed 27 pounds.

3.3.2 Microelectronic Devices - Microelectronic technology shall be considered. When used, microelectronic devices shall have two or more sources and the device from each source shall be interchangeable. Interchangeability shall be demonstrated by random installation of devices from two or more sources during fabrication of production quantities. Successful operation of the equipment with a random mixing of device sources shall be proof of interchangeability Unsuccessful operation of the equipment shall be evaluated to determine if a device is faulty or not interchangeable.

3.3.3 Electron Devices - Electron tubes and semiconductor devices shall be in accordance with MIL-T-21200.

3.3.4 Modules, Maintenance - The electronic portions of the equipment shall be divided into maintenance modules as specified in AR-10. Modules shall normally be considered repairable.

3.3.5 Connectors - The equipment shall provide for the use of connectors in accordance with MIL-T-21200.

3.3.5.1 External Connectors - External connectors shall provide for the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:33Z
Check the source to verify that this is the current version before use.

Reference Designation	Connector Type	Function
J1	MS24264G20B28SN	Signal output to Display Set, Mission Recorder, AN/UPQ-5
J2	MS24264G12B3P6	Power Input to Simulator, Radar Signal, SM-697/UPQ-5

3.3.6 Controls - The equipment shall have the following front panel controls:

Identification	Type	Function
POWER ON/OFF	Toggle switch, 2-position	Applies 115 VAC, 60/400 Hz source voltage to the internal power supplies when set to ON. Removes source voltage when set to OFF.
RADAR STAIRCASE/ PPI	Toggle switch, 2-position	When set to PPI, selects simulated PPI video signal and its associated horizontal and vertical sweeps as output signals of the equipment. When set to STAIRCASE, selects simulated gray scale (staircase) video signal and its associated horizontal and vertical sweeps as output signals of the equipment.
DATA MAX/NORM/ MIN	Toggle switch, 3-position	Selects simulated data values. When set to MAX, selects a positive data word consisting of digital "1's". When set to NORM, selects a positive data word consisting of alternate "1's" and "0's". When set to MIN, selects a negative data word consisting of digital "1's"
PARITY ERROR ON/OFF	Toggle switch, 2-position	Simulates parity error. Selects correct data pulse parity bit when set to OFF; selects incorrect parity when set to ON.
DATA ADDRESS	Thumbwheel switches (2)	Selects the data address portion of the digital data word.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:33Z
Check the source to verify that this is the current version before use.

3.3.7 Test Points - Front panel test points shall be provided for the following equipment output signals:

Test Point Identification	Reference Designation	Signal
DATA	TP1	Digital data signal (see 3.6.1.6)
VIDEO	TP2	Video (see 3.6.1.4)
HORIZ SWP	TP3	Horizontal Sweep (see 3.6.1.2)
VERT SWP	TP4	Vertical Sweep (see 3.6.1.3)
INTEN GATE	TP5	Intensity gate (see 3.6.1.1)

3.3.8 Human Engineering - Human engineering shall be in accordance with MIL-T-21200.

3.4 Availability -

3.4.1 Reliability - When specified by the procuring activity, the contractor shall conduct a reliability program in accordance with MIL-STD-454, Requirement 35. The program plan shall be approved by the procuring activity.

3.4.2 Maintainability - When specified by the procuring activity, the contractor shall conduct a maintainability program in accordance with MIL-STD-454, Requirement 54. The program plan shall be approved by the procuring activity.

3.4.3 Interference Control - The generation of electromagnetic interference by the equipment and the vulnerability of the equipment to electromagnetic interference shall be controlled within the limits of MIL-STD-461 unless otherwise specified.

3.4.4 Maintenance Provisions and Field Testing - Provisions for maintenance shall be as specified in MIL-T-21200. Specific test points and test facilities shall be provided to the greatest extent practicable for ease of field testing and maintenance.

3.4.5 Nomenclature and Nameplates - Nomenclature assignment and nameplate approval for equipment identification shall be in accordance with MIL-N-18307.

3.4.6 Service Conditions - Service conditions (environmental) shall be in accordance with MIL-T-21200 for class 3 equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:33Z
Check the source to verify that this is the current version before use.

3.4.7 Standard Conditions - The following conditions shall be used to establish normal performance characteristics under standard conditions and for making laboratory bench tests.

Temperature	Room ambient
Altitude	Normal ground
Vibration	None
Humidity	Room ambient
Input power voltage	115 VAC, 60 - 400 Hz

3.5 Performance Characteristics - The performance of the equipment shall be as specified herein.

3.6 Detail Requirements

3.6.1 Output Signals - The equipment shall be designed to provide the output signals specified in the following paragraphs.

3.6.1.1 Intensity Gate Signal - The intensity gate output signal shall be compatible with TTL levels. A logic "1" shall correspond to an unblanking signal and a logic "0" shall correspond to a blanked radar display (see Figures 1A and 2A).

3.6.1.2 Horizontal Sweep Signal - The equipment shall provide horizontal sweep signals as illustrated in Figures 1B and 2B.


3.6.1.3 Vertical Sweep Signal - The equipment shall provide vertical sweep signals as illustrated in Figures 1C and 2C.

3.6.1.4 Video Signal - The equipment shall provide video sweep signals as illustrated in Figures 1D and 2D.

3.6.1.5 Audio Signal - The equipment shall provide an audio signal which shall have a 1 volt peak-to-peak, nominal, 1000 Hertz ± 100 waveform. The waveshape shall approximate a square wave.

3.6.1.6 Digital Data Signal - The equipment shall provide a digital data signal as illustrated in Figure 3. The digital data signal shall be a repetitive waveform with the data address bits controlled by the front panel DATA ADDRESS switches, the data and sign bits shall be controlled by the front panel DATA switch, and the parity bit (correct or incorrect parity) shall be controlled by the front panel PARITY ERROR switch.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:33Z
Check the source to verify that this is the current version before use.

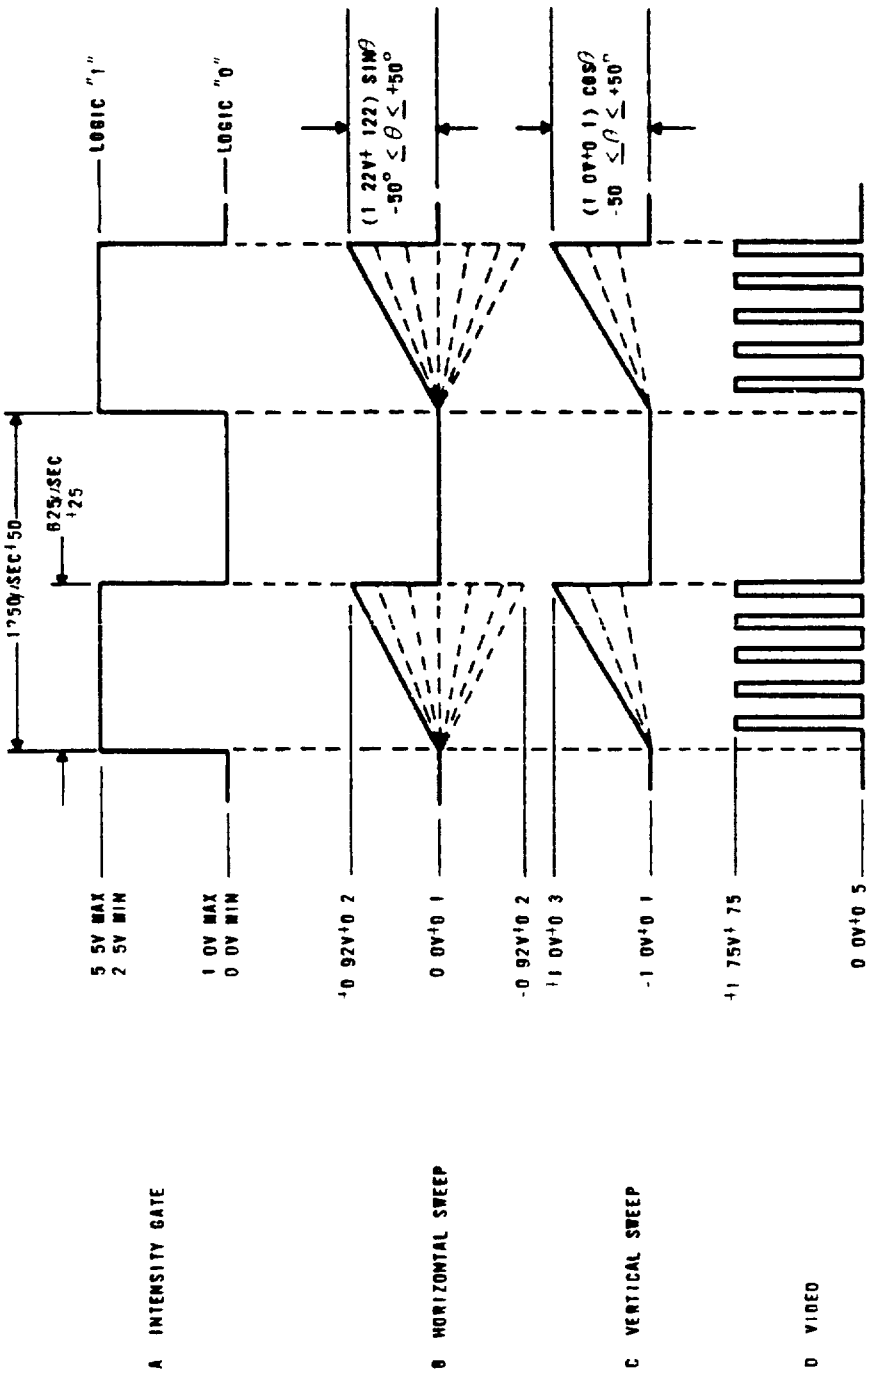

AP15280

FIG 1 PPI MODE RADAR SIGNALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:33Z
Check the source to verify that this is the current version before use.

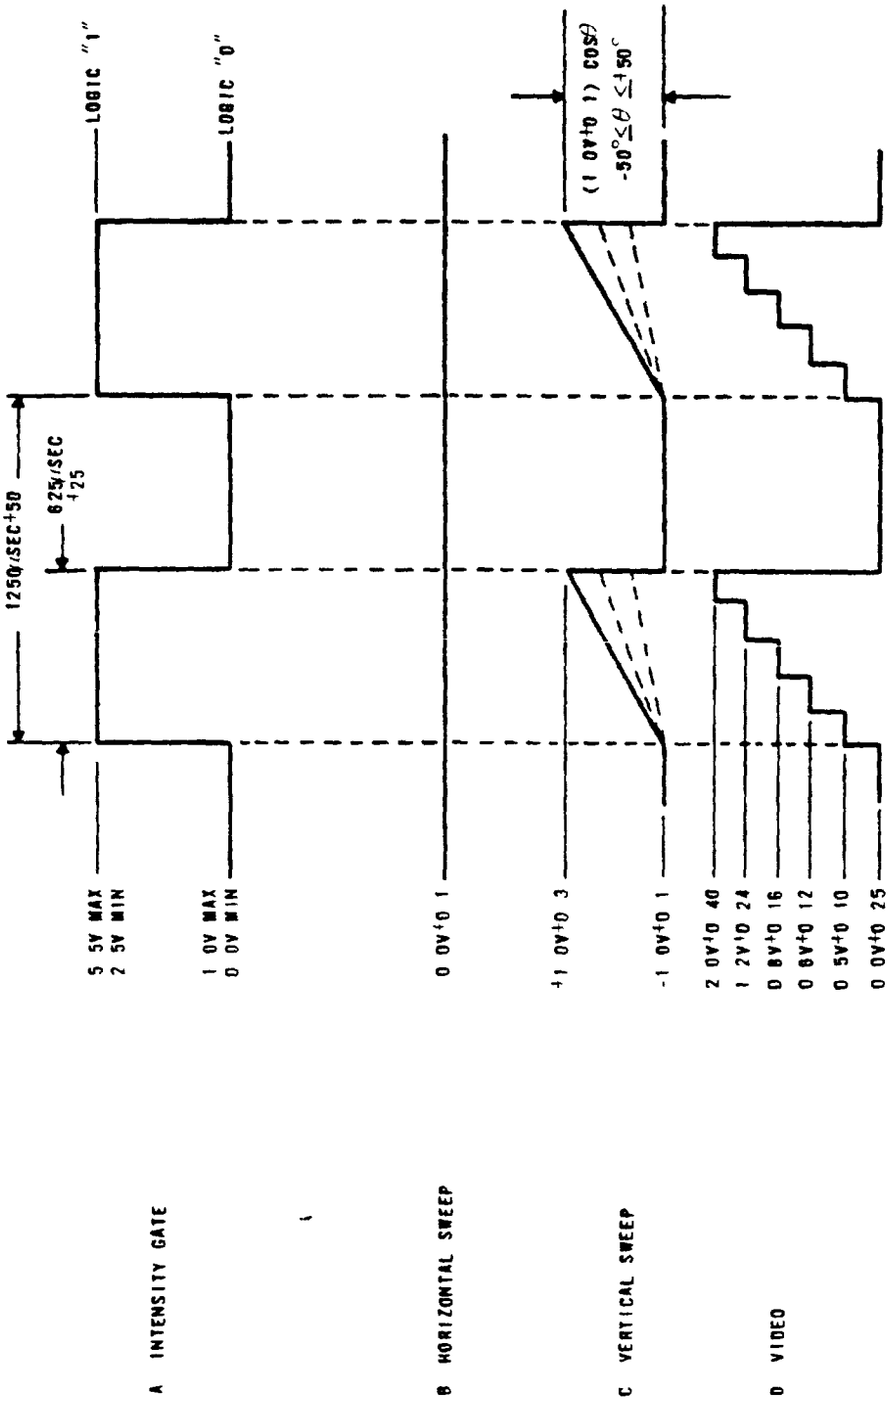

AP15281

FIG 2 STAIRCASE (GRAY SCALE) MODE RADAR SIGNALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:33Z
Check the source to verify that this is the current version before use.

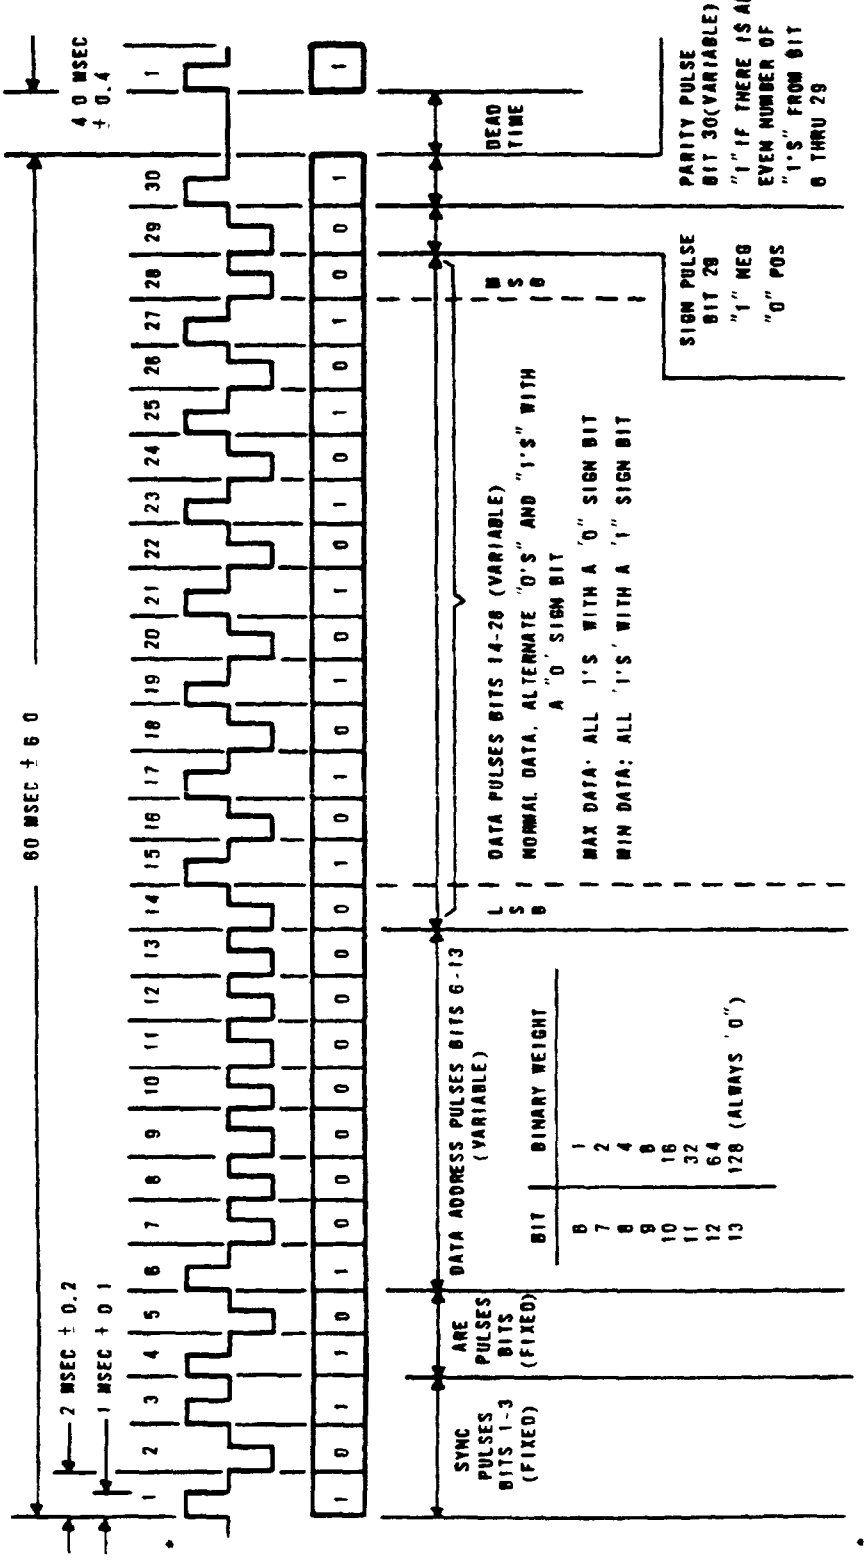


FIG 3 DIGITAL DATA SIGNALS

AP15282

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:33Z
Check the source to verify that this is the current version before use.

3.6.2 Electrical Power Source - The equipment shall receive power from the Static Frequency Converter, CV-2933/UPQ-5 which is part of the Display Set, Mission Recorder AN/UPQ-5. An alternate method of supplying power to the equipment shall be to provide 115 VAC, 60 - 400 Hertz to J2 via a MS24264G12B3P6 connector.

3.6.3 Content - The Signal Simulator shall contain the below listed subassemblies and printed wiring assemblies (PWA). Each PWA shall be 7-5/16 inches by 4-9/16 inches with electrical interfaces terminated into a M21097/13-02 connector per MIL-C-21097.

(1) Chassis Assembly, Signal Simulator (A1)

This chassis assembly shall provide the mounting facilities and interconnected wiring to interface the below subassemblies, the front panel controls, and the external cables.

(2) Circuit Card Assembly, Digital Data Generator (A2)

This PWA shall generate the digital data signal which shall be a bi-polar, return-to-zero repetitive waveform.

(3) Circuit Card Assembly, Clock and Video Generator (A3)

This PWA shall contain a 3 MHz crystal-controlled oscillator counted down to provide the required timing waveforms for the system. It shall also generate the audio and video test signals.

(4) Circuit Card Assembly, Fault Sensing (A4)

This PWA shall monitor selected output signals and shall energize a fault indicator light in the event that a malfunction is detected.

(5) Circuit Card Assembly, Sweep Generator (A5)

This PWA shall generate the horizontal sweep and vertical sweep waveforms.

(6) Circuit Card Assembly, Sector Scan Sine/Cosine Generator (A6)

This PWA shall generate the envelope of the horizontal and vertical sweep waveforms for the PPI mode of operation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:33Z
Check the source to verify that this is the current version before use.

(7) Circuit Card Assembly, Extender (A8)

This PWA shall provide electrical connection between an extended assembly and its chassis connector.

(8) Power Supply Subassembly, +6V (PS1)

A 6 Volt DC supply capable of supplying 1.5 amperes.

(9) Power Supply Subassembly, ±15V (PS2)

A ±15 Volt DC supply capable of supplying 0.5 ampere.

(10) Overvoltage Protector Subassembly, +6V (Z1)

Provides overvoltage protection on the output of the 6 Volt DC supply.

3.7 Dimensions - The maximum overall size shall not exceed 13-1/8 inches wide by 4-3/8 inches high by 17-1/2 inches long (dimensions do not include handles). The equipment shall be capable of being mounted in the lower portion of the Mission Recorder Mount, MT-4557/UPQ-5.

3.8 Finish - Finishes shall be in accordance with MIL-T-21200.

3.9 Interchangeability - Interchangeability shall be in accordance with MIL-T-21200.

3.10 Workmanship - Workmanship shall be in accordance with MIL-T-21200.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:33Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for Inspection - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any inspections deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Classification of Tests - Items covered by this specification shall be subjected to the following tests to determine compliance with all applicable requirements:

First article (preproduction) tests

Initial production tests

Acceptance tests

4.2 First Article (Preproduction) Tests - First article (preproduction) tests shall be made on an equipment representative of the production equipments to be supplied under the contract. The tests shall be accomplished under the responsibility of the contractor and shall be conducted in accordance with the approved test procedure of 4.5. The government inspector and the procuring activity shall be advised when tests are to be conducted so that a representative may be designated to witness or supervise the tests when so desired. Contractors not having adequate facilities to conduct all required tests shall obtain the services of a commercial testing laboratory acceptable to the Government.

4.2.1 First Article (Preproduction) Test Data - The contractor shall submit all data collected in conducting these tests to the procuring agency for review and approval.

4.2.2 Scope of Tests - The tests shall include all tests deemed necessary, by the procuring activity, to determine that the equipment meets all the requirements of this specification, other applicable specifications and the contract.

4.2.3 First Article (Preproduction) Approval - Approval of the test sample shall be by the procuring activity upon satisfactory completion of all tests. No production equipments shall be delivered prior to the approval of the test sample. Prefabrication of production equipment prior to the approval of the test sample is at the contractor's own risk. The approved test sample shall be retained by the contractor for his use in the fabrication and testing of equipment to be submitted for acceptance. The test sample shall not be considered as one of the equipments under the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:33Z
Check the source to verify that this is the current version before use.

4.2.4 Production Equipments - Equipments supplied under the contract shall in all respects, including design, construction, workmanship, performance and quality, be equivalent to the approved test sample. Each equipment shall be capable of successfully passing the same tests as imposed on the test sample. Evidence of non-compliance with the above shall constitute cause for rejection and for equipment already accepted by the Government, it shall be the obligation of the contractor to make necessary corrections as approved by the procuring activity.

4.3 Initial Production Tests - When specified by the procuring activity, one of the first ten production equipments shall be selected and sent at the contractor's expense to a designated Government laboratory for tests. This equipment shall be selected by the procuring activity after the equipment has successfully passed all individual tests. The test sample shall not be selected for this test.

4.3.1 Scope of Tests - This equipment may be subjected to any and all tests the procuring activity deems necessary to assure that the production equipment is equivalent to the previously approved test sample in design, construction, workmanship, performance and quality and that it meets all applicable requirements.

4.3.2 Accessory Material - In addition to the complete equipment submitted for Initial Production Tests, the contractor shall also submit such accessory material and data necessary to test the equipment.

4.3.3 Initial Production Sample Approval - Approval of the initial production sample shall be by the procuring activity upon satisfactory completion of all tests. Any design, material or performance defect made evident during this test shall be corrected by the contractor to the satisfaction of the procuring activity. Failure of the initial production sample to pass any of the tests shall be cause for deliveries of equipment under the contract to cease until proper corrective action is approved and accomplished. Corrective action shall also be accomplished on equipment previously accepted when requested by the procuring activity.

4.3.4 Reconditioning of Initial Production Test Sample - On completion of the initial production test, the equipment shall be reworked by the contractor by replacing all wear or damaged items. After reworking, the contractor shall resubmit the equipment for acceptance.

4.4 Acceptance Tests - The contractor shall furnish all samples and shall be responsible for accomplishing the acceptance tests. All inspection and testing shall be under the supervision of the government inspector. Contractors not having testing facilities

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:33Z
Check the source to verify that this is the current version before use.

satisfactory to the procuring activity shall engage the service of a commercial testing laboratory acceptable to the procuring activity. The contractor shall furnish test reports showing quantitative results for all acceptance tests. Such reports shall be signed by an authorized representative of the contractor or laboratory, as applicable. Acceptance or approval of material during the course of manufacture shall not be construed as a guarantee of the acceptance of the finished product. Acceptance tests shall consist of the following:

(1) Individual tests (4.4.1)

(2) Reliability assurance tests (4.4.2)

(3) Special tests (4 4.3)

4.4.1 Individual Tests - Each equipment submitted for acceptance shall be subjected to the individual tests. These tests shall be adequate to determine compliance with the requirements of material, workmanship, operational adequacy and reliability. As a minimum, each equipment accepted shall have passed the following tests

(1) Examination of product (4.4.1 1)

(2) Operational test (4 4 1.2)

(3) Manufacturing run-in test (4 4 1.3)

4.4.1.1 Examination of Product - Each equipment shall be examined carefully to determine that the material and workmanship requirements have been met.

4.4.1.2 Operational Test - Each equipment shall be operated long enough to permit the equipment temperature to stabilize and to check sufficient characteristics in accordance with Section 3 of this specification and record adequate data to assure satisfactory equipment operation.

4.4.1.3 Manufacturing Run-In Test - When specified by the procuring activity, each equipment shall be operated under the conditions specified herein for a period of 6 hours without failure. A failure shall be defined as anything which causes malfunctioning of the equipment. Only those adjustments will be permitted which can be made by using such controls and adjustments that are accessible to the operator during the normal use of the equipment.

Temperature	Ambient room
Humidity	Ambient room

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:33Z
Check the source to verify that this is the current version before use.

4.4.2 Reliability Assurance Tests - When specified by the procuring activity, reliability assurance tests shall be conducted in accordance with MIL-STD-781.

4.4.2.1 Test Details - The test details such as the length of the test cycle, the performance characteristics to be measured, special failure criteria, preventive maintenance to be allowed during the test etc., shall be part of the test procedures to be submitted and approved by the procuring activity prior to the beginning of the Qualification Test Phase of the Reliability Assurance Tests.

4.4.3 Special Tests - Special tests shall be conducted on a quantity of equipments for the purpose of checking the effect of any design or material change on the performance of the equipment and to assure adequate quality control. The equipment selected for special tests may be selected from equipments previously subjected to the reliability assurance tests.

4.4.3.1 Special Test Schedule - Selection of equipments for special tests shall be made as follows:

(1) On an early equipment after an engineering or material change.

(2) Whenever failure reports or other information indicate additional tests are required. (This will be determined by the procuring activity.).

4.4.3.2 Scope of Tests - Special tests shall consist of such tests as approved by the procuring activity. Test procedures previously approved for the preproduction tests shall be used where applicable. When not applicable, the contractor shall prepare a test procedure and submit it to the procuring activity for approval prior to conducting the tests.

4.4.4 Equipment Failure - Should a failure occur during either the reliability assurance or special tests, the following action shall be taken:

(1) Determine the cause of failure.

(2) Determine if the failure is an isolated case or design defect.

(3) Submit to the procuring activity for approval, proposed corrective action intended to reduce the possibility of the same failure(s) occurring in failure tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:33Z
Check the source to verify that this is the current version before use.

(4) Where practical, include a test in the individual test to check all equipment for this requirement until reasonable assurance is obtained that the defect has been satisfactorily corrected.

4.5 Test Procedures - The procedures used for conducting preproduction tests and acceptance tests shall be prepared by the contractor and submitted to the procuring activity for review and approval. The right is reserved by the procuring activity or the government inspector to modify the tests or require any additional tests deemed necessary to determine compliance with the requirements of this specification and the contract. Specification MIL-T-18303 shall be used as a guide for preparation of test procedures. When approved test procedures are available from previous contracts such procedures will be provided and may be used when their use is approved by the procuring activity. However, the right is reserved by the procuring activity to require modification of such procedures, including additional tests, when deemed necessary.

4.6 Reconditioning of Test Equipment - Equipment which has been subjected to acceptance tests shall be reconditioned by the contractor by replacing all wear or damaged items. After reworking, the contractor shall resubmit the equipment for acceptance.

4.7 Presubmission Testing - No item, part or complete equipment shall be submitted by the contractor until it has been previously tested and inspected by the contractor and found to comply, to the best of his knowledge and belief, with all applicable requirements.

4.8 Rejection and Retest - Equipment which has been rejected may be reworked or have parts replaced to correct the defects and resubmitted for acceptance. Before resubmitting, full particulars concerning previous rejection and the action taken to correct the defects found in the original shall be furnished to the government inspector.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:33Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 General - All major units and parts of the equipment shall be preserved, packaged, packed and marked for the level of shipment specified in the contract or order in accordance with MIL-E-17555 and MIL-STD-794. In the event the equipment is not covered in MIL-E-17555, the method of preservation for Level A shall be determined in accordance with the selection chart in Appendix D of MIL-STD-794.

5.2 Marking - In addition to any special marking by the contract or order, each unit package and exterior container shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:33Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended Use - The Signal Simulator shall be peculiar ground support equipment used to supply simulated mission recorder input signals to the Display Set, Mission Recorder, AN/UPQ-5. These simulated signals shall be used to isolate SRA level faults within the display set by qualified intermediate level avionics personnel.

6.2 Performance Objectives - Minimum size and weight, simplicity of operation, ease of maintenance, and an improvement in the performance and reliability of the specific functions beyond the requirements of the specification are objectives which shall be considered in the production of this equipment. Where it appears a substantial reduction in size and weight or improvement in simplicity of design, performance, ease of maintenance or reliability will result from the use of materials, parts and processes other than those specified in MIL-T-21200, it is desired that their use be investigated. When investigation shows advantages can be realized, a request for approval shall be submitted to the procuring activity for consideration. Each request shall be accompanied by complete supporting information.

6.3 Precedence of Documents - When the requirements of the contract, this specification, or applicable subsidiary specifications are in conflict, the following precedence shall apply:

(1) Contract - The contract shall have precedence over any specification.

(2) This Specification - This specification shall have precedence over all applicable subsidiary specifications. Any deviation from this specification, or from subsidiary specifications where applicable, shall be specifically approved in writing by the procuring activity.

(3) Referenced Specifications - Any referenced specification shall have precedence over all applicable subsidiary specifications referenced therein All referenced specifications shall apply to the extent specified.

6.4 Ordering Data - Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:33Z
Check the source to verify that this is the current version before use.

(1) Title, number, and date of this specification.

(2) Reliability requirements (see 3.4.1).

(3) Maintainability requirements (see 3.4.2).

(4) Initial production test requirements (see 4.3).

(5) Manufacturing run-in test requirements (see 4.4.1.3).

(6) Reliability assurance test requirements (see 4.4.2).

(7) Selection of applicable levels of packaging and packing (see 5.1).

6.5 Type Designation - The parentheses (*), when used in the type designation, will be deleted or replaced by either a number or letter furnished by the procuring activity upon application by the contractor for assignment of nomenclature in accordance with 3.4.5. The complete type number shall be used on nameplates, shipping records and instruction books, as applicable.

6.6 Revisions - In specification revisions and superseding amendments, an asterisk "*" preceding a paragraph number denotes paragraphs in which changes have been made from the previous issue. This has been done as a convenience only and the government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content as written, irrespective of the asterisk notations and relationship to the last previous issue.

6.7 Specification Cognizance - This specification is under the cognizance of AIR-5342

Custodians:

Navy - AS

Preparing Activity:

Navy - AS
Project No 6625-N635

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:33Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Philadelphia, Pa 19112

POSTAGE AND FEES PAID
Department of the Navy
DOD 316

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Engineering Specifications and Standards Department (Code X)
Naval Air Engineering Center
Philadelphia, Pa 19112

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:33Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE
MIL-S-81977(AS) SimulatOr, Radar Signal SM-697/UPQ-5

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?
☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:33Z
Check the source to verify that this is the current version before use.