INCH POUND

MIL-PRF-22885/53D
1 March 2001
SUPERSEDING
MIL-PRF-22885/53C
19 February 1993

PERFORMANCE SPECIFICATION SHEET

# SWITCH, PUSH BUTTON, ILLUMINATED, PUSHBUTTON FOR (WITH LAMP-CAP COLOR FILTERS)

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the indicator lights described herein shall consist of this specification sheet and MIL-PRF-22885.

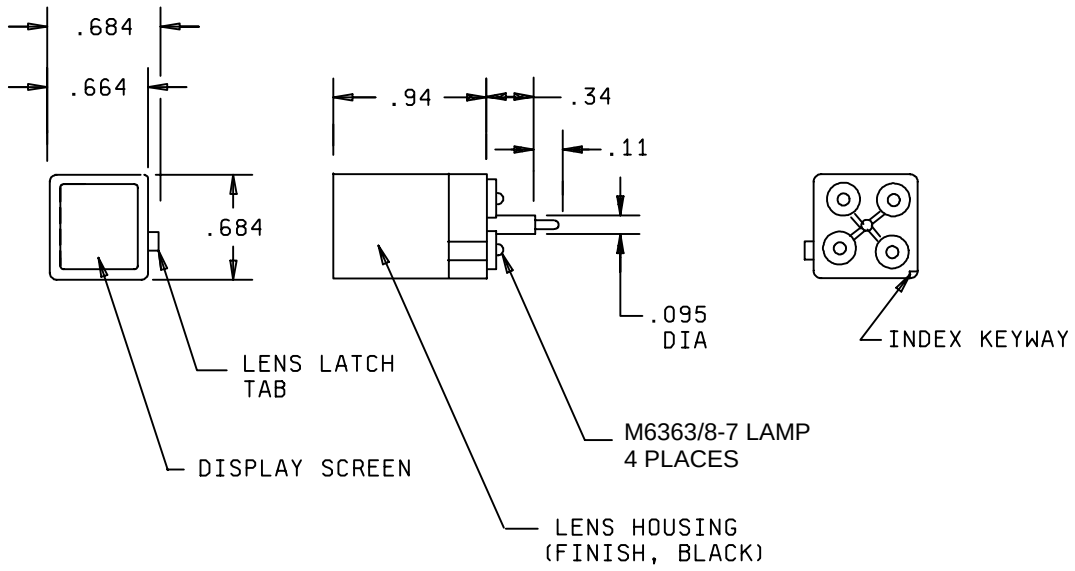


| Inches | mm |
|---|---|
| .095 | 2.41 |
| .11 | 2.79 |
| .34 | 8.64 |
| .664 | 16.87 |
| .684 | 17.37 |
| .94 | 23.88 |

NOTES:
1. Dimensions are in inches. Metric equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ±.005 (.13 mm) for three place decimals and ±.020 (51 mm) for two place decimals.
3. Dashed circles represent color filters.

FIGURE 1. Design and construction.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:20Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figure 1. Pushbutton shall accommodate four midget flange base T-1 ¾ incandescent lamps and shall be capable of mating with switch housings in accordance with MIL-PRF-22885/56. Pushbutton shall accommodate color filters in accordance with MIL-PRF-22885/55. Unless otherwise specified in contract or purchase order, lamps are not supplied.

Enclosure design: 1 (Unseated)

Temperature characteristic: 1 (-55°C to +85°C).

Vibration grade: 2 (10 - 500 Hz)

Display type: W (White until illuminated, then background appears in color).

Material:

Display screen: Shall be of clear transparent material.

Lamp module: Lamp insulator block may be fabricated from thermoplastic material.

Color and luminance: See table I.

Part or Identifying Number (PIN): M22885/53-(dash number from table II).

Qualification inspection: As a part of illuminated push button switch assembly, MIL-PRF-22885/56.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:20Z
Check the source to verify that this is the current version before use.

TABLE I. Chromaticity limits and photometric brightness.

| Color | Color code | Chromaticity limits 1/ 2360° Kelvin | | Switch photometric brightness (foot-lamberts) 2/ minimum |
|---|---|---|---|---|
| | | X | Y | |
| Blue | B | 210<br>330<br>330<br>210 | 280<br>280<br>420<br>420 | 35 |
| Green | G | 260<br>300<br>160<br>200 | 570<br>630<br>660<br>720 | 50 |
| Red | R | 695<br>703<br>655<br>660 | 285<br>SL 3/<br>325<br>SL 3/ | 80 |
| White | W | 380<br>460<br>460<br>380 | 350<br>385<br>430<br>410 | 150 |
| Yellow | Y | 562<br>570<br>596<br>605 | 415<br>SL 3/<br>382<br>SL 3/ | 150 |

1/ The chromaticity of the illuminated display, expressed as x and y coordinates on the CIE chromaticity diagram, shall lie within areas bounded by the coordinates listed for each color, using a source illuminate of 2360°K.

2/ Switch photometric brightness, when viewed from the front of the applicable pushbutton display and using midget flange, T-1 ¾ incandescent lamps operated at a 34 ±.02 MSCP.

3/ SL = Spectrum Locus (where intersected by other coordinate pair).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:20Z
Check the source to verify that this is the current version before use.

TABLE II DASH NUMBER, DISPLAY CONFIGURATION AND COLOR SEQUENCE

| DASH NUMBER 1/2/ | DISPLAY 3/ | DASH NUMBER 1/2/ | DISPLAY 3/ |
|---|---|---|---|
| -1XXXX |  | -5XXX |  |
| -2XXX |  | -6XX |  |
| -3XX |  | -7XXX |  |
| -4X |  | -8XXX |  |

1/ Dash numbers are shown for lamp capsules without color filters. Replace X's with the color codes of table I in the sequence shown.
2/ Dash numbers as shown replace and are interchangeable with previous dash numbers which included additional zeros. (Example: -001XXXX)
3/ Pushbutton assembly removal latch is shown for orientation.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:20Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army - AR, CR4, MI
Navy - AS, MC, OS, SH
Air Force - 19, 99

Preparing activity:
DLA - CC

(Project 5930-1716-07)



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:20Z
Check the source to verify that this is the current version before use.