
MILITARY SPECIFICATION SHEET

(C) SWITCH, PUSHBUTTON, ILLUMINATED, COLOR FILTER FOR, PLANAR DESIGN

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-S-22885

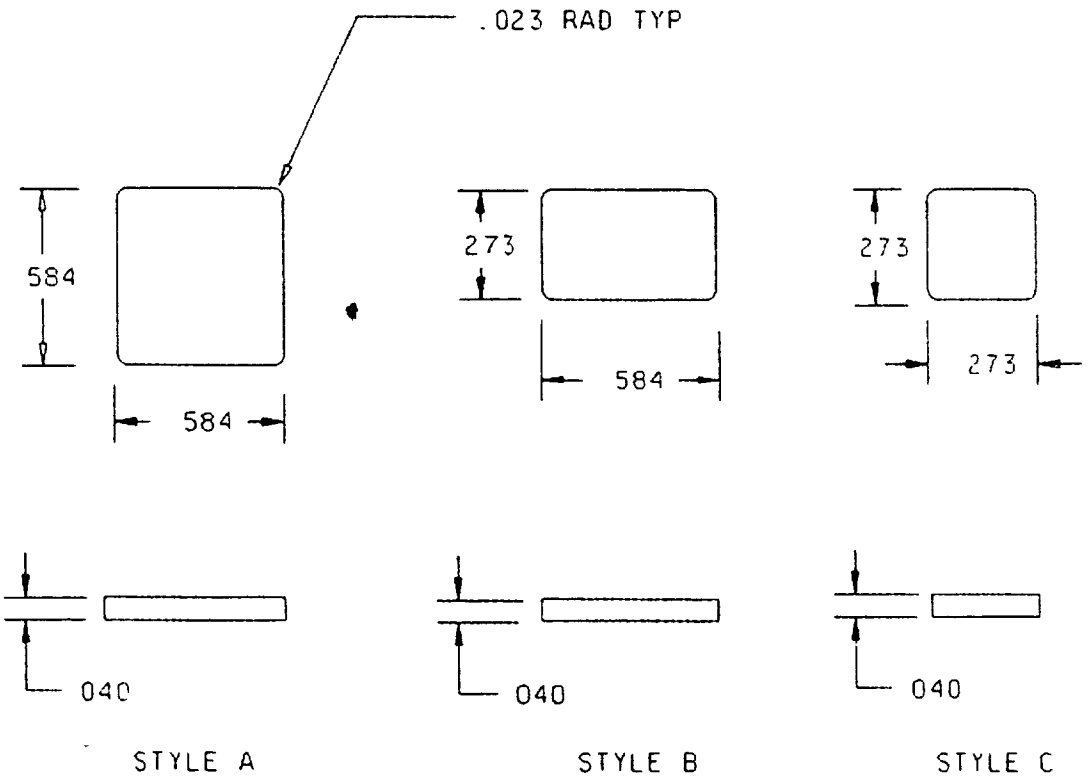


| Inches | mm |
|---|---|
| 023 | 0 58 |
| 040 | 1 02 |
| 273 | 6 93 |
| 584 | 14 83 |

NOTES
1. Dimensions are in inches. Metric equivalents are given for general information only.
2. Unless otherwise specified, tolerance is ± 005 ( 13 mm)

FIGURE 1. Design and construction

(C) denotes changes


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:20Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction See figure 1 Color filters shall be capable of mating with pushbuttons in accordance with MIL-S-22885/52

Temperature characteristic 1 (-55°C to +85°C)

Material Polycarbonate in accordance with L-P-393

Color and luminance See table I

Part or Identifying Number (PIN) See table II

(C) Qualification inspection As a part of illuminated push button switch assembly, MIL-S-22885/56 or MIL-S-22885/86

TABLE I Chromaticity limits and photometric brightness.

| Color | Color code | Chromaticity limits 1/ 2360° Kelvin | | Switch photometric brightness (foot-lamberts) 2/ minimum |
|---|---|---|---|---|
| | | x | y | |
| (C) Blue | B | 210 | 280 | 35 |
| | | 330 | 280 | |
| | | 330 | 420 | |
| | | 210 | 420 | |
| Green | G | 230 | 610 | 150 |
| | | 350 | 540 | |
| | | 380 | 580 | |
| | | 280 | 660 | |
| Red | R | 695 | 285 | 150 |
| | | 703 | SL 3/ | |
| | | 655 | 325 | |
| | | 660 | SL 3/ | |
| White | W | 490 | 390 | 150 |
| | | 490 | 420 | |
| | | 535 | 410 | |
| | | 535 | 435 | |
| Yellow | Y | 565 | 410 | 150 |
| | | 580 | SL 3/ | |
| | | 540 | 435 | |
| | | 550 | SL 3/ | |

1/ The chromaticity of the assembled illuminated display, expressed as x and y coordinates on the CIE chromaticity diagram, shall lie within areas bounded by the coordinates listed for each color, using a source illuminate of 2360°K

2/ Switch photometric brightness, when viewed from the front of the applicable pushbutton display and using midget flange, T-1 3/4 incandescent lamps operated at a 34 ± 02 MSCP

3/ SL = Spectrum Locus (where intersected by other coordinate pair)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:20Z
Check the source to verify that this is the current version before use.

TABLE II PIN's and characteristics

| PIN | | | Color | Color code |
|---|---|---|---|---|
| Style A | Style B | Style C | | |
| M22885/54-001 | M22885/54-007 | M22885/54-013 | Blue | B |
| M22885/54-002 | M22885/54-008 | M22885/54-014 | Green | G |
| M22885/54-003 | M22885/54-009 | M22885/54-015 | Red | R |
| M22885/54-004 | M22885/54-010 | M22885/54-016 | White | W |
| M22885/54-005 | M22885/54-011 | M22885/54-017 | Yellow | Y |
| M22885/54-006 | M22885/54-012 | M22885/54-018 | Amber 1/ | A |

1/ Amber color filters, M22885/54-006, -012, and -018 are inactive for new design

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - MI
Navy - SH
Air Force - 99
DLA - ES

User activities
Army - AR, ME
Navy - AS, MC, OS
Air Force - 19

Preparing activity
Navy - EC

Agent
DLA - ES

(Project 5930-1502-03)



Source: https://assist.dla.mil -- Downloaded: 202610-19T14:20Z
Check the source to verify that this is the current version before use.