
MILITARY SPECIFICATION SHEET

(F) SWITCH, PUSHBUTTON, ILLUMINATED, COLOR FILTER FOR, LAMP-CAP DESIGN

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-S-22885

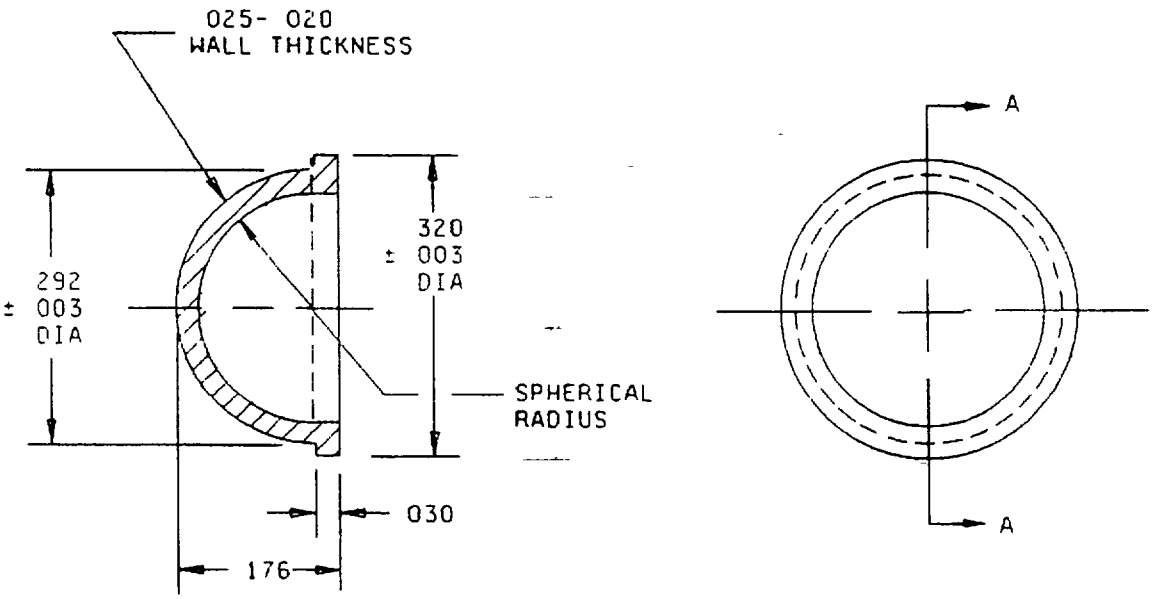

SECTION A-A

Inches	mm
±003	0 08
020	0 51
025	0 64
030	0 76
176	4 47
292	7 42
320	8 13

NOTES
1 Dimensions are in inches Metric equivalents are given for general information only
2 Unless otherwise specified, tolerance is ± 010 (25 mm)

FIGURE 1 Design and construction

(E) Centers changed

Source: https://assist.dla.mil -- Downloaded: 202640-19T14:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction See figure 1 Color filters shall be capable of mating with pushbuttons in accordance with MIL-S-22885/53

Temperature characteristic T (-55°C to +85°C)

Material Transparent silicone rubber in accordance with ZZ-R-765 Durometer 55 maximum

Color and luminance See table I

Part or Identifying Number (PIN) See table II

(E) Qualification inspection As a part of illuminated push button switch assembly MIL-S-22885/56

TABLE I Chromaticity limits and photometric brightness

Color	Color code	Chromaticity limits 1/ 2360° Kelvin x	Chromaticity limits 1/ 2360° Kelvin y	Switch photometric brightness (foot-lamberts) 2/ minimum
(E) Blue	B	210 330 330 210	280 280 420 420	25
Green	G	260 300 160 200	570 630 660 720	50
Red	R	695 703 655 660	285 SL 3/ 325 SL 3/	80
White	W	380 460 460 380	350 385 430 410	150
Yellow	Y	502 570 596 605	415 SL 3/ 382 SL 3/	150

1/ The chromaticity of the illuminated display, expressed as x and y coordinates on the CIE chromaticity diagram, shall lie within areas bounded by the coordinates listed for each color, using a source illuminate of 2360°K

2/ Switch photometric brightness, when viewed from the front of the applicable pushbutton display and using midget flange, T-1 3/4 incandescent lamps operated at a 34 ± 02 MSCP

3/ SL = Spectrum Locus (where intersected by other coordinate pair)

Source: https://assist.dla.mil -- Downloaded: 202640-19T14:21Z
Check the source to verify that this is the current version before use.

TABLE II Part or Identifying Number

PIN's	Color	Color code
M22885/55-001	Blue	B
M22885/55-002	Green	G
M22885/55-003	Red	R
M22885/55-004	White	W
M22885/55-005	Yellow	Y

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - MI
Navy - SH
Air Force - 99
DLA - ES

User activities
Army - AR, ME
Navy - AS, MC, OS
Air Force - 19

Preparing activity
Navy - EC

Agent
DLA - ES

(Project 5930-1502-04)

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:21Z
Check the source to verify that this is the current version before use.