INCH-POUND

MIL-PRF-22885/55F
17 MARCH 1999
SUPERSEDING
MIL-S-22885/55E
19 February 1993

PERFORMANCE SPECIFICATION SHEET

SWITCH, PUSHBUTTON, ILLUMINATED, COLOR FILTER FOR, LAMP-CAP DESIGN

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the color filter described herein shall consist of this specification sheet and MIL-PRF-22885.

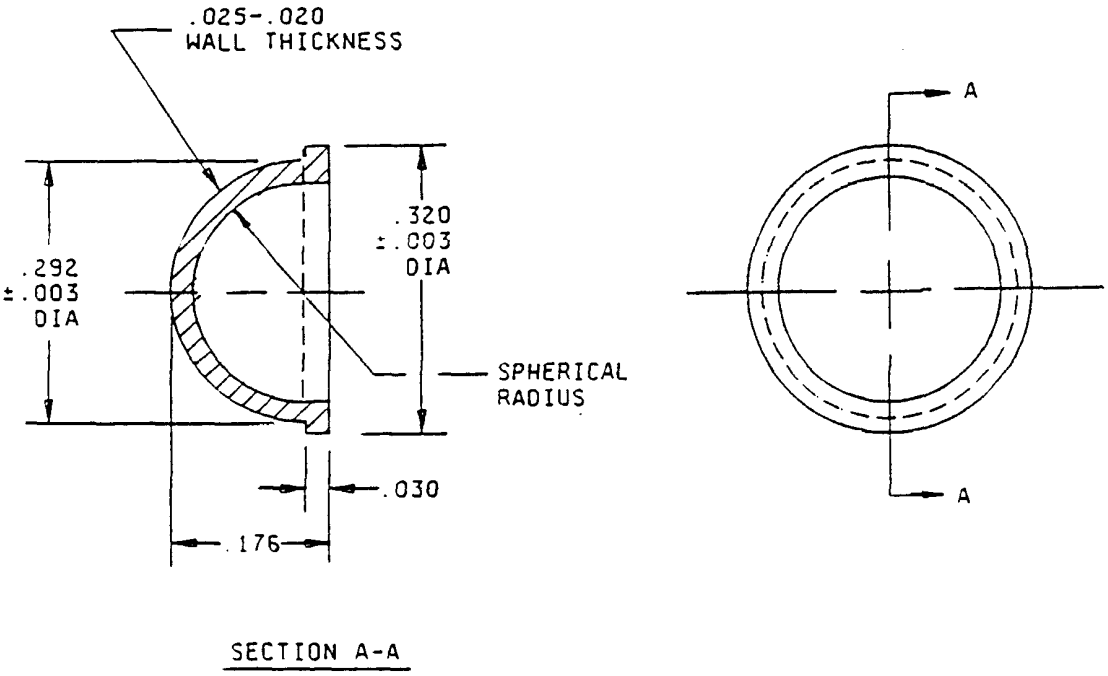

SECTION A-A

Inches	mm
.003	0.08
.020	0.51
.025	0.64
.030	0.76
.176	4.47
.292	7.42
.320	8.13

NOTES:
1. Dimensions are in inches. Metric equivalents are given for general information only.
2. Unless otherwise specified, tolerance is ±.010 (.25 mm).

FIGURE 1. Design and construction.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figure 1. Color filters shall be capable of mating with pushbuttons in accordance with MIL-PRF-22885/53.

Temperature characteristic: 1 (-55°C to +85°C).

Color and luminance: See table I.

Part or Identifying Number (PIN): See table II.

Qualification inspection: As a part of illuminated push button switch assembly, MIL-PRF-22885/56.

TABLE I. Chromaticity limits and photometric brightness.

Color	Color code	Chromaticity limits 1/ 2360° Kelvin		Switch photometric brightness (foot-lamberts) 2/ minimum
		x	y	
Blue	B	.210 .330 .330 .210	.280 .280 .420 .420	25
Green	G	.260 .300 .160 .200	.570 .630 .660 .720	50
Red	R	.695 .703 .655 .660	.285 SL 3/ .325 SL 3/	80
White	W	.380 .460 .460 .380	.350 .385 .430 .410	150
Yellow	Y	.562 .570 .596 .605	.415 SL 3/ .382 SL 3/	150

1/ The chromaticity of the assembled illuminated display, expressed as x and y coordinates on the CIE chromaticity diagram, shall lie within areas bounded by the coordinates listed for each color, using a source illuminate of 2360°K.

2/ Switch photometric brightness, when viewed from the front of the applicable pushbutton display and using midget flange, T-1 ¾ incandescent lamps operated at a .34 ±.02 MSCP.

3/ SL = Spectrum Locus (where intersected by other coordinate pair).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:21Z
Check the source to verify that this is the current version before use.

TABLE II. Part or Identifying Number.

PIN's	Color	Color code
M22885/55-001	Blue	B
M22885/55-002	Green	G
M22885/55-003	Red	R
M22885/55-004	White	W
M22885/55-005	Yellow	Y

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Review activities:
Army - AR, CR4, MI
Navy - AS, MC, OS, SH
Air Force - 19, 99

Preparing activity:
DLA - CC

(Project 5930-1669-05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:21Z
Check the source to verify that this is the current version before use.