INCH-POUND
MIL-PRF-22885/55G
28 April 2004
SUPERSEDING
MIL-PRF-22885/55F
17 MARCH 1999

PERFORMANCE SPECIFICATION SHEET

SWITCH, PUSHBUTTON, ILLUMINATED, COLOR FILTER FOR, LAMP-CAP DESIGN

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the color filter described herein shall consist of this specification sheet and MIL-PRF-22885.

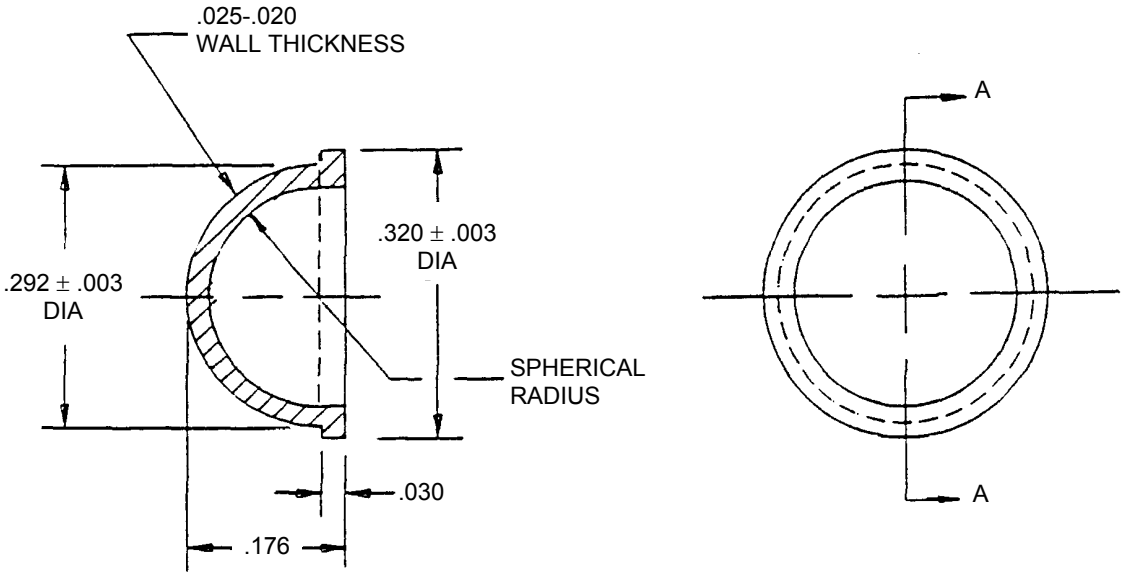

SECTION A-A

Inches	mm	Inches	mm
.003	0.08	.176	4.47
.020	0.51	.292	7.42
.025	0.64	.320	8.13
.030	0.76		

NOTES:
1. Dimensions are in inches. Metric equivalents are given for general information only.
2. Unless otherwise specified, tolerance is ±.010 (.25 mm).

FIGURE 1. Design and construction.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figure 1. Color filters shall be capable of mating with pushbuttons in accordance with MIL-PRF-22885/53.

Temperature characteristic: 1 (-55°C to +85°C).

Color and luminance: See table I.

Part or Identifying Number (PIN): See table II.

Qualification inspection: As a part of illuminated push button switch assembly, MIL-PRF-22885/56.

TABLE I. Chromaticity limits and photometric brightness.

Color	Color code	Chromaticity limits 1/ 2360° Kelvin		Switch photometric brightness (foot-lamberts) 2/ minimum
		x	y	
Blue	B	.210 .330 .330 .210	.280 .280 .420 .420	25
Green	G	.260 .300 .160 .200	.570 .630 .660 .720	50
Red	R	.695 .703 .655 .660	.285 SL 3/ .325 SL 3/	80
White	W	.380 .460 .460 .380	.350 .385 .430 .410	150
Yellow	Y	.562 .570 .596 .605	.415 SL 3/ .382 SL 3/	150

1/ The chromaticity of the assembled illuminated display, expressed as x and y coordinates on the CIE chromaticity diagram, shall lie within areas bounded by the coordinates listed for each color, using a source illuminate of 2360°K.

2/ Switch photometric brightness, when viewed from the front of the applicable pushbutton display and using midget flange, T-1 ¾ incandescent lamps operated at a .34 ±.02 MSCP.

3/ SL = Spectrum Locus (where intersected by other coordinate pair).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:21Z
Check the source to verify that this is the current version before use.

TABLE II. Part or Identifying Number.

PIN's	Color	Color code
M22885/55-001	Blue	B
M22885/55-002	Green	G
M22885/55-003	Red	R
M22885/55-004	White	W
M22885/55-005	Yellow	Y

Reference Documents:
MIL-PRF-22885
MIL-PRF-22885/53
MIL-PRF-22885/56

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army - AR, CR4, MI
Navy - AS, MC, OS, SH
Air Force - 19, 99

Preparing activity:
DLA - CC

(Project 5930-1808)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at www.dodssp.daps.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:21Z
Check the source to verify that this is the current version before use.