NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


INCH-POUND
MIL-PRF-22885/79C
12 August 1980
SUPERSEDING
MIL-S-22885/79B
13 November 1978

PERFORMANCE SPECIFICATION SHEET

Ⓒ SWITCHES, PUSH BUTTON, ILLUMINATED, MOMENTARY, SPDT AND DPDT, ONE LAMP, 7 AMPERE SILVER CONTACTS, 1 AMPERE GOLD CONTACT

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the switches described herein shall consist of this document and the latest issue of Specification MIL-S-22885.

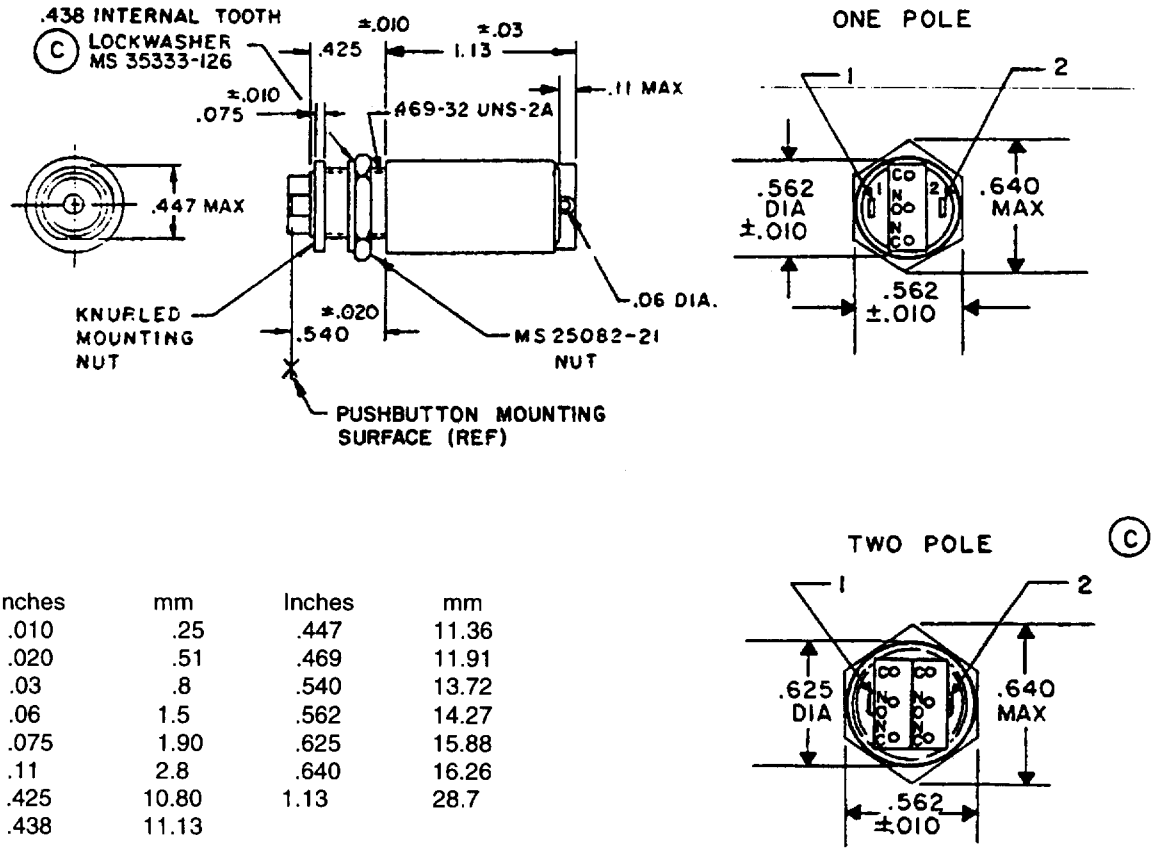

Inches	mm	Inches	mm
.010	.25	.447	11.36
.020	.51	.469	11.91
.03	.8	.540	13.72
.06	1.5	.562	14.27
.075	1.90	.625	15.88
.11	2.8	.640	16.26
.425	10.80	1.13	28.7
.438	11.13		


FIGURE 1. Basic switch body less lens.

Ⓒ denotes changes


DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:25Z
Check the source to verify that this is the current version before use.


(C) PRINTED CIRCUIT TERMINATION

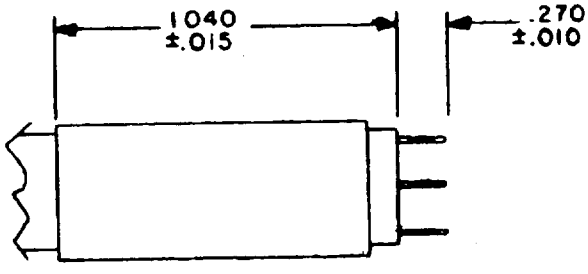

ONE POLE

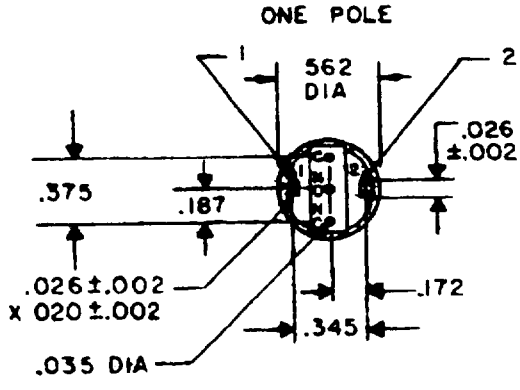

TWO POLE

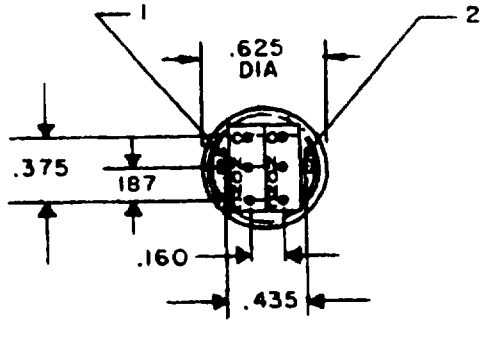


INCHES	MM	INCHES	MM
.002	.05	.187	4.75
.010	.25	.270	6.86
.015	.38	.345	8.76
.020	.51	.375	9.52
.026	.66	.435	11.05
.035	.89	.562	14.27
.160	4.06	.625	15.88
.172	4.37	1.040	26.42

FIGURE 1 Basic switch body less lens - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:25Z
Check the source to verify that this is the current version before use.


INCHES	MM
003	.08
005	.13
214	5 44
.448	11.38
468	11.89

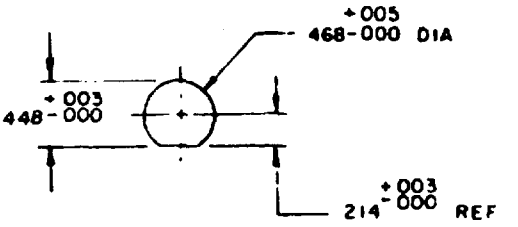


"D" PATTERN HOLE SHOWN FOR BODY KEYING
468 DIA ROUND HOLE MAY ALSO BE USED

Recommended panel mounting hole dimensions

ONE POLE



TWO POLE (C)




SCHEMATICS

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only and are based upon 1 00 inch = 25 4 mm
3. Unless otherwise specified, tolerances are ± 01 (3 mm) for two place decimals and ± 005 (13 mm) for three place decimals
4. (C) Unit mounts in panels from 010 (.25 mm) to 20 (5 1 mm) thick
5. Basic contacts are MS24547-1 or MS24547-2 (MIL-S-8805/4)

FIGURE 1. Basic switch body less lens - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:25Z
Check the source to verify that this is the current version before use.

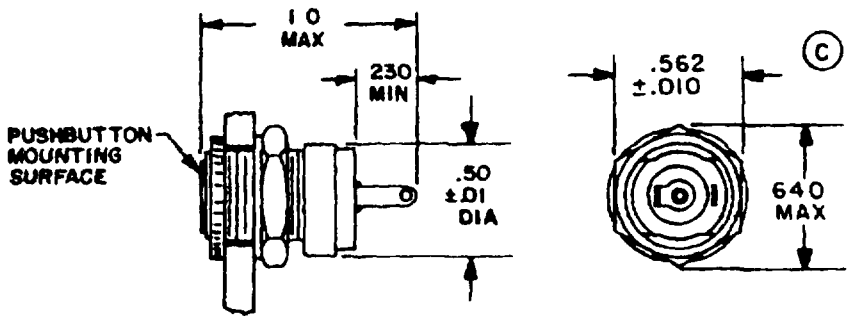


INCHES	MM
010	.25
075	1 90
230	5 84
500	12 70
562	14 27
640	16 26

NOTES
1 Dimensions and configuration are same as switch body in figure 1 except as shown
2 Metric equivalents are given for general information only and are based upon 1.00 inch = 25 4 mm

FIGURE 2 Indicator body less lens

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:25Z
Check the source to verify that this is the current version before use.

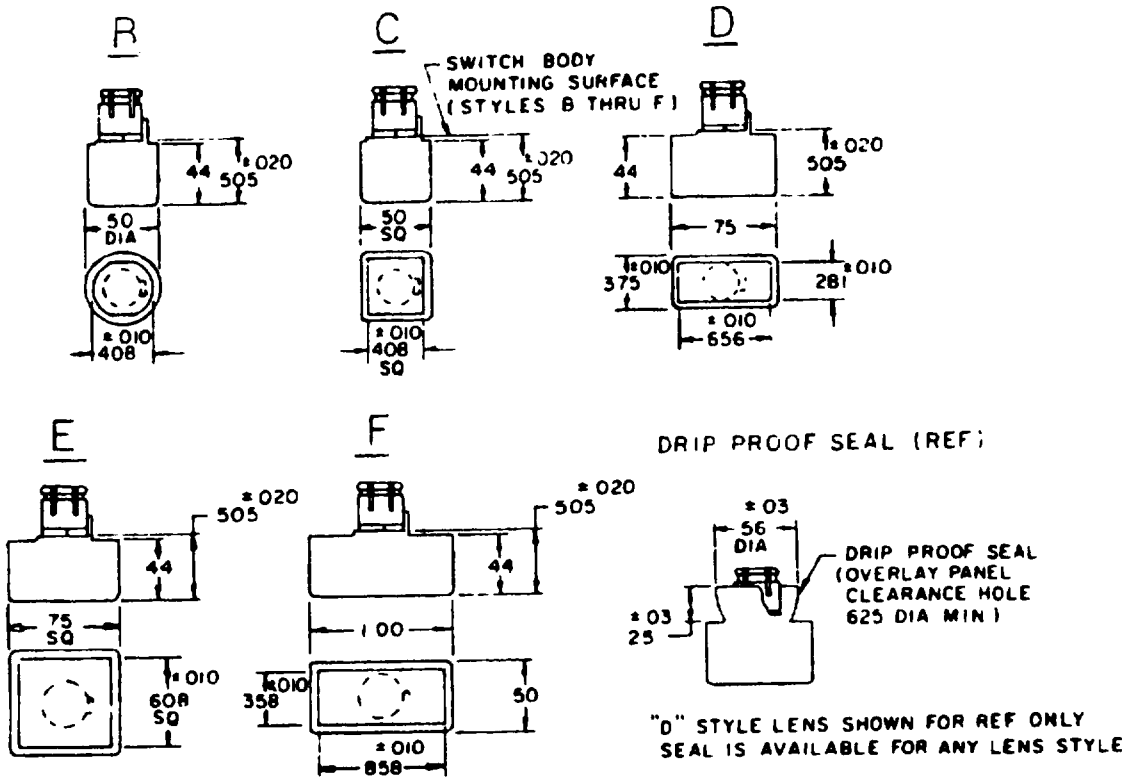

INCHES	MM	INCHES	MM
.010	.25	.50	12.7
.020	.51	505	12 83
.03	8	.56	14 2
25	6.4	608	15 44
.281	7.14	625	15 88
358	9 09	.656	16 66
375	9.52	.75	19.0
408	10.36	.858	21.79
44	11.2	1 00	25 4

(C)

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only and are based upon 1 00 inch = 25 4 mm.
3. Unless otherwise specified, tolerances are ± 010 (25 mm) for two place decimals and ± 005 (13 mm) for three place decimals
4. Pushbutton housing is black and illuminates in a forward direction.
5. Lens surface concave approximately 03 inches (.8 mm) on B, C and D pushbutton only

FIGURE 3. Lens styles.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and configuration See figures 1, 2, and 3

Housing finish Anodize per MIL-A-8625.

Operating characteristics.

Actuation force 22 ±4 ounces.

Actuation travel. .200 maximum.

(C) Lens extraction force 2 to 8 pounds.

Mounting torque 5 ±.5 inch-pounds.

(C) Weight 18.3 grams maximum.

Electrical ratings See tables I and II

Enclosure design See table V

Vibration grade 3 (10-2,000Hz)

Shock Method I

Temperature characteristic 1 (-55° to +85°C).

Operation A (momentary action)

Lens transmittance T (translucent).

Luminance values See table IV.

Lens. Shall be of translucent white color in the unlighted condition. In the lighted condition, it shall appear in a color determined by the color filter.

TABLE I. Silver contacts per MS24547-1.

Load	Sea level		50,000 feet
	28 Vdc	115 Vac, 60 Hz	28 Vdc
	(amperes)	(amperes)	(amperes)
Resistive	7	7	4
Inductive	4	7	2.5
Lamp	2.5	2	2.5

TABLE II Gold contacts per MS24547-2 filled or diffused.

Load	Sea level 28 Vdc (amperes)	50,000 feet 28 Vdc (amperes)
Resistive	1	1
Inductive	.5	.5

Complete switch shall consist of

1. Pushbutton assembly in accordance with figure 3.
2. Lamp, one T-1 3/4 miniget flange based incandescent lamp - not supplied, order separately
3. Switch or indicator body in accordance with figure 1 or 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:25Z
Check the source to verify that this is the current version before use.

© Part numbers

Complete switch (one pole, solder terminals) See table V

Switch or indicator body only See table VI.

Pushbutton only See table VII.

QUALIFICATION

All applicants for qualification approval shall demonstrate that each of their items conforms to all the requirements specified in the applicable documents, singularly and in combination with all other previously qualified items, regardless of manufacturer.

Group submission

a When the basic sensitive switches are qualified to MIL-S-8805 and the gold and silver contact switches are submitted for qualification, at the same time switches shall be tested in accordance with table III.

b When the basic sensitive switches are not qualified to MIL-S-8805, the switch type for which qualification is sought, shall be submitted to the complete tests in accordance with MIL-S-22885.

© TABLE III Qualification inspection (group submission).

Part number	Inspection table of MIL-S-22885		Extent of approval
	Group	Number of samples	
M22885/79-154 with M22885/79-148 Pushbutton	I	(All sample units)	All part numbers
	II	4 (from group I) 1/	
	III	2 (from group I)	
	VI	2 (from group I) 2/	
	VII	2 (from group I)	
	VIII	50 3/	
M22885/79-157 with M22885/79-118 Pushbutton	I	(All sample units)	
	II	4 (from group I) 1/	
	VI	2 (from group I) 2/	

1/ Insulation resistance Following step 6 of the final cycle of the moisture resistance test, the insulation resistance measurement shall not be less than 5 megohms

2/ Sea level, resistance dc load only

3/ Pushbutton only, 2 each color and style, tested in any switch body.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:25Z
Check the source to verify that this is the current version before use.

TABLE IV. Luminance.

Color code	Lens style	Luminance 1/ (foot-lamberts minimum average)
G	B	37
	C	34
	D	26
	E	25
	F	20
R	B	184
	C	155
	D	133
	E	118
	F	100
W	B	485
	C	441
	D	300
	E	265
	F	166
Y	B	630
	C	579
	D	470
	E	375
	F	275
B	B	42
	C	37
	D	34
	E	25
	F	22

1/ When illuminated by one MS25237-327 lamp of 0.34 ±.02 mean spherical candle power.
Readings are for all lens styles.

TABLE V. Part numbers for complete switch (one pole, solder terminals). 1/

Part number M22885/79-				
Without drippproof seal	With drippproof seal	Lens style	Color code	Switch contacts
001	051	B	G	Silver
002	052		R	
003	053		W	
004	054		Y	
005	055		B	
006	056	C	G	
007	057		R	
008	058		W	
009	059		Y	
010	060		B	
011	061	D	G	
012	062		R	
013	063		W	
014	064		Y	
015	065		B	
016	066	E	G	
017	067		R	
018	068		W	
019	069		Y	
020	070		B	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:25Z
Check the source to verify that this is the current version before use.

© TABLE V. Part numbers for complete switch (one pole, solder terminals). - Cont.

Without dripproof seal	With dripproof seal	Lens style	Color code	Switch contacts
021	071	F	G	Silver
022	072		R	
023	073		W	
024	074		Y	
025	075		B	
026	076	B	G	Gold
027	077		R	
028	078		W	
029	079		Y	
030	080		B	
031	081	C	G	
032	082		R	
033	083		W	
034	084		Y	
035	085		B	
036	086	D	G	
037	087		R	
038	088		W	
039	089		Y	
040	090		B	
041	091	E	G	
042	092		R	
043	093		W	
044	094		Y	
045	095		B	
046	096	F	G	
047	097		R	
048	098		W	
049	099		Y	
050	100		B	

© 1/ For other than direct government procurement. For direct government stocking, switch bodies and pushbuttons should be procured separately (see tables VI and VII).

© TABLE VI. Part numbers for switch or indicator body only.

Part number M22885/79-		Circuit	Contacts
Solder terminals	PC terminals		
101	156	1 Pole	Silver
102	157	1 Pole	Gold
154	158	2 Pole	Silver
155	159	2 Pole	Gold
103	---	Indicator	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:25Z
Check the source to verify that this is the current version before use.

© TABLE VII. Part numbers for pushbutton only.

Part number M22885/79-		Lens style	Color code
Without dripproof seal	With dripproof seal		
103	128	B	G
104	129		R
105	130		W
106	131		Y
107	132		B
108	133	C	G
109	134		R
110	135		W
111	136		Y
112	137		B
113	138	D	G
114	139		R
115	140		W
116	141		Y
117	142		B
118	143	E	G
119	144		R
120	145		W
121	146		Y
122	147		B
123	148	F	G
124	149		R
125	150		W
126	151		Y
127	152		B

Custodians
Army - EK
Navy - EC
Air Force - 85

Review activities
Army - MI, AV
Navy - OS, AS
Air Force - 17, 99
DLA - ES

User activities
Army - AR
Navy - MC
Air Force - 19

Preparing activity
Navy - EC

Agent
DLA - ES

(Project 5930-1125-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:25Z
Check the source to verify that this is the current version before use.