
INCH POUND
MIL-PRF-22885/79E
1 November 2006
SUPERSEDING
MIL-PRF-22885/79D
1 March 2001

PERFORMANCE SPECIFICATION SHEET

# SWITCHES, PUSH BUTTON, ILLUMINATED, MOMENTARY, SPDT AND DPDT, ONE LAMP, 7 AMPERE SILVER CONTACTS, 1 AMPERE GOLD CONTACT

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-22885.

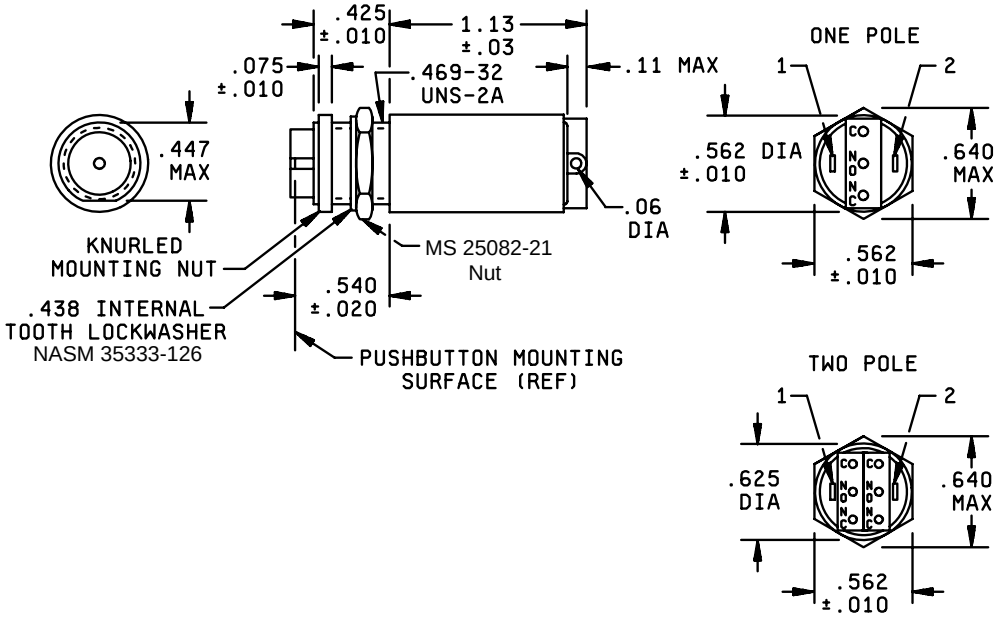



| Inches | mm | Inches | mm |
|---|---|---|---|
| .010 | .25 | .447 | 11.36 |
| .020 | .51 | .469 | 11.91 |
| .03 | .8 | .540 | 13.72 |
| .06 | 1.5 | .562 | 14.27 |
| .075 | 1.90 | .625 | 15.88 |
| .11 | 2.8 | .640 | 16.26 |
| .425 | 10.80 | 1.13 | 28.7 |
| .438 | 11.13 | | |

FIGURE 1. Basic switch body less lens.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:25Z
Check the source to verify that this is the current version before use.

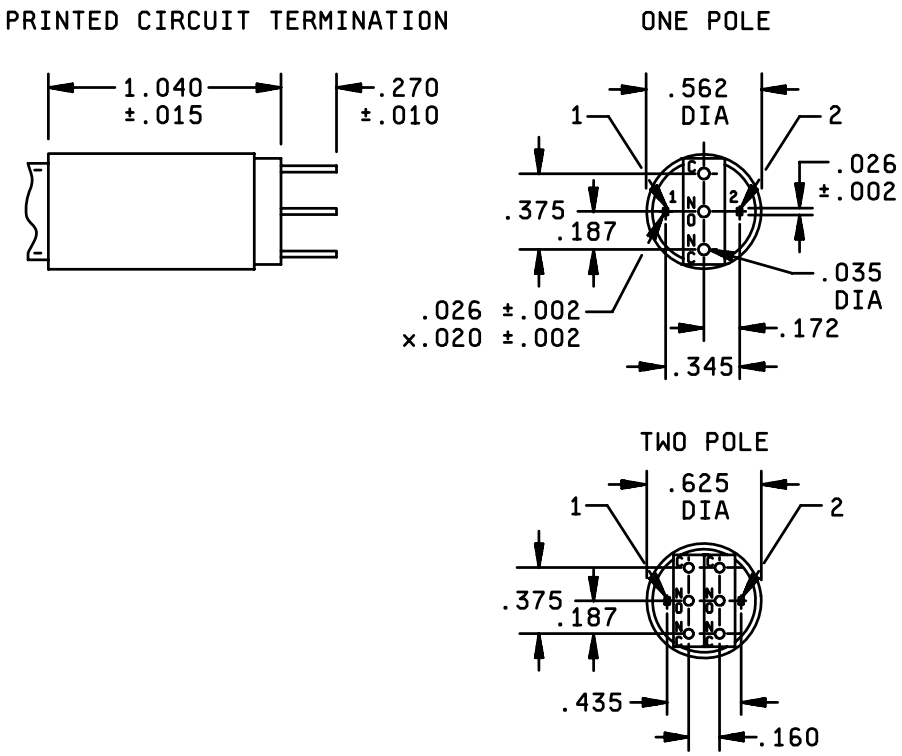



| Inches | mm | Inches | mm |
|---|---|---|---|
| .002 | .05 | .187 | 4.75 |
| .010 | .25 | .270 | 6.86 |
| .015 | .38 | .345 | 8.76 |
| .020 | .51 | .375 | 9.52 |
| .026 | .66 | .435 | 11.05 |
| .035 | .89 | .562 | 14.27 |
| .160 | 4.06 | .625 | 15.88 |
| .172 | 4.37 | 1.040 | 26.42 |


FIGURE 1. Basic switch body less lens - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:25Z
Check the source to verify that this is the current version before use.

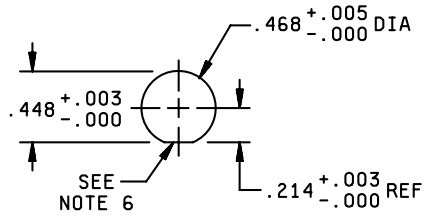


RECOMMENDED PANEL MOUNTING HOLE DIMENSIONS

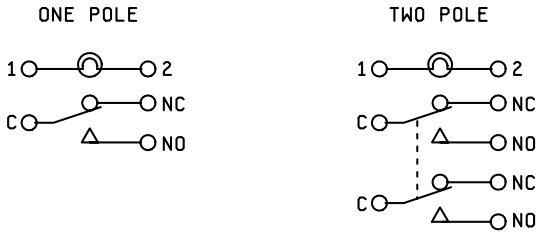


SCHEMATICS


| Inches | mm |
|---|---|
| .003 | .08 |
| .005 | .13 |
| .214 | 5.44 |
| .448 | 11.38 |
| .468 | 11.89 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.01 (.3 mm) for two place decimals and ±.005 (.13 mm) for three place decimals.
4. Unit mounts in panels from .010 (.25 mm) to .20 (5.1 mm) thick.
5. Basic contacts MIL-PRF-8805/4 or MIL-PRF-8805/109
6. “D” pattern hole shown for body keying .468 dia. round hole may also be used.

FIGURE 1. Basic switch body less lens - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:25Z
Check the source to verify that this is the current version before use.

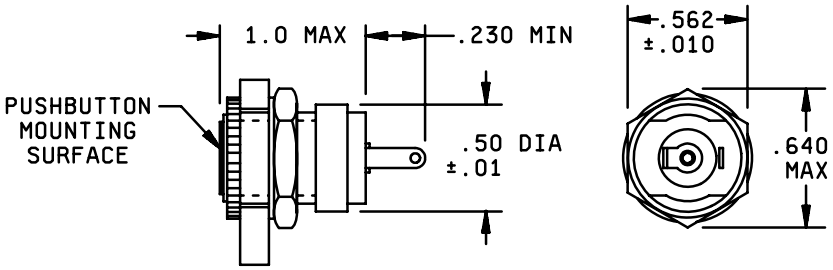



| Inches | mm |
|---|---|
| .010 | .25 |
| .075 | 1.90 |
| .230 | 5.84 |
| .500 | 12.70 |
| .562 | 14.27 |
| .640 | 16.26 |

NOTES:
1. Dimensions and configuration are same as switch body in figure 1 except as shown.
2. Metric equivalents are given for general information only.

FIGURE 2. Indicator body less lens.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:25Z
Check the source to verify that this is the current version before use.

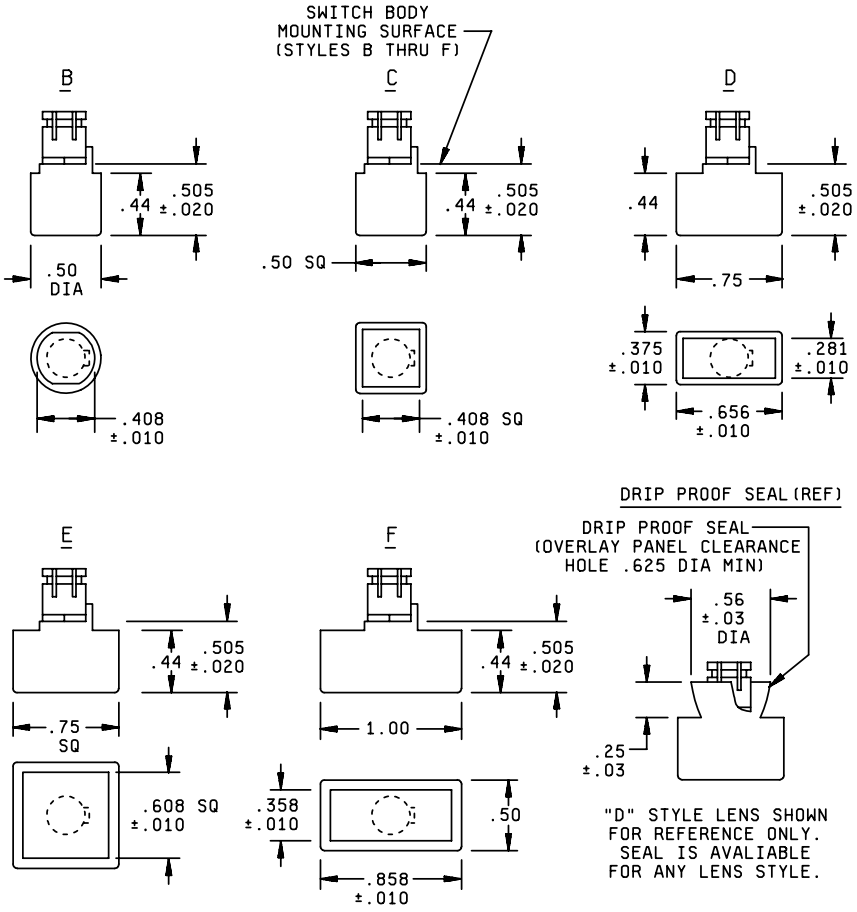


| Inches | mm | Inches | mm |
|---|---|---|---|
| .010 | .25 | .50 | 12.7 |
| .020 | .51 | .505 | 12.83 |
| .03 | .8 | .56 | 14.2 |
| .25 | 6.4 | .608 | 15.44 |
| .281 | 7.14 | .625 | 15.88 |
| .358 | 9.09 | .656 | 16.66 |
| .375 | 9.52 | .75 | 19.0 |
| .408 | 10.36 | .858 | 21.79 |
| .44 | 11.2 | 1.00 | 25.4 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (.25 mm) for two place decimals and ±.005 (13 mm) for three place decimals.
4. Pushbutton housing is black and illuminates in a forward direction.
5. Lens surface concave approximately .03 inches (.8 mm) on B, C and D pushbutton only.

FIGURE 3. Lens styles.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and configuration: See figures 1, 2, and 3.

Housing finish: Anodize per MIL-A-8625.

Operating characteristics:

Actuation force: 22 ±4 ounces.

Actuation travel: .200 maximum.

Lens extraction force: 2 to 8 pounds.

Mounting torque: 5 ±.5 inch-pounds.

Weight: 18.3 grams maximum.

Electrical ratings: See tables I and II.

Enclosure design: See table V.

Vibration grade: 3 (10-2, 000Hz)

Shock: Method I.

Temperature characteristic: 1 (-55° to +85°C).

Operation: A (momentary action).

Lens transmittance: T (translucent).

Luminance values: See table IV.

Lens: Shall be of translucent white color in the unlighted condition. In the lighted condition, it shall appear in a color determined by the color filter.

TABLE I. Silver contacts per MIL-PRF-8805/4.

| Load | Sea level | | 50,000 feet 28 V dc |
|---|---|---|---|
| | 28 V dc | 115 V ac, 60 Hz | |
| | (amperes) | (amperes) | (amperes) |
| Resistive | 7 | 7 | 4 |
| Inductive | 4 | 7 | 2.5 |
| Lamp | 2.5 | 2 | 2.5 |

TABLE II. Gold contacts per MIL-PRF-8805/4 filled or diffused.

| Load | Sea level 28 V dc (amperes) | 50,000 feet 28 V dc (amperes) |
|---|---|---|
| Resistive | 1 | 1 |
| Inductive | .5 | .5 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:25Z
Check the source to verify that this is the current version before use.

Complete switch shall consist of:

1. Pushbutton assembly in accordance with figure 3.
2. Lamp, one T-1 ¾ midget flange based incandescent lamp - not supplied, order separately.
3. Switch or indicator body in accordance with figure 1 or 2.

Part numbers:

Complete switch (one pole, solder terminals): See table VI.
Switch or indicator body only: See table VI.
Pushbutton only: See table VII.

QUALIFICATION:

All applicants for qualification approval shall demonstrate that each of their items conforms to all the requirements specified in the applicable documents, singularly and in combination with all other previously qualified items, regardless of manufacturer.

Group submission:

a. When the basic sensitive switches are qualified to MIL-PRF-8805 and the gold and silver contact switches are submitted for qualification, at the same time switches shall be tested in accordance with table III.

b. When the basic sensitive switches are not qualified to MIL-PRF-8805, the switch type for which qualification is sought, shall be submitted to the complete tests in accordance with MIL-PRF-22885.

TABLE III. Qualification inspection (group submission).

| Part number | Inspection table of MIL-PRF-22885 | | Extent of approval |
|---|---|---|---|
| | Group | Number of samples | |
| M22885/79-154<br>with<br>M22885/79-148<br><br>Pushbutton | I<br>II<br>III<br>VI<br>VII<br>VIII | (All sample units)<br>4 (from group I) 1/<br>2 (from group I)<br>2 (from group I) 2/<br>2 (from group I)<br>50 3/ | All part numbers |
| | I<br>II<br>VI | (All sample units)<br>4 (from group I) 1/<br>2 (from group I) 2/ | |

1/ Insulation resistance: following step 6 of the final cycle of the moisture resistance test, the insulation resistance measurement shall not be less than 5 megohms.
2/ Sea level, resistance dc load only.
3/ Pushbutton only, 2 each color and style, tested in any switch body.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:25Z
Check the source to verify that this is the current version before use.

TABLE IV. Luminance.

| Color code | Lens style | Luminance 1/ (foot-lamberts minimum average) |
|---|---|---|
| Green | B | 37 |
| | C | 34 |
| | D | 26 |
| | E | 25 |
| | F | 20 |
| Red | B | 184 |
| | C | 155 |
| | D | 133 |
| | E | 118 |
| | F | 100 |
| White | B | 485 |
| | C | 441 |
| | D | 300 |
| | E | 265 |
| | F | 166 |
| Yellow | B | 630 |
| | C | 579 |
| | D | 470 |
| | E | 375 |
| | F | 275 |
| Blue | B | 42 |
| | C | 37 |
| | D | 34 |
| | E | 25 |
| | F | 22 |

1/ When illuminated by one MIL-DTL-6363/8-5 lamp of 0.34 ±.02 mean spherical candle power. Readings are for all lens styles.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:25Z
Check the source to verify that this is the current version before use.

TABLE V. Part numbers for complete switch (one pole, solder terminals). 1/

| Part number M22885/79- | | Lens style | Color code | Switch contacts |
|---|---|---|---|---|
| Without dripproof seal | With dripproof seal | | | |
| 001 | 051 | B | G | Silver |
| 002 | 052 | B | R | |
| 003 | 053 | B | W | |
| 004 | 054 | B | Y | |
| 005 | 055 | B | B | |
| 006 | 056 | C | G | |
| 007 | 057 | C | R | |
| 008 | 058 | C | W | |
| 009 | 059 | C | Y | |
| 010 | 060 | C | B | |
| 011 | 061 | D | G | |
| 012 | 062 | D | R | |
| 013 | 063 | D | W | |
| 014 | 064 | D | Y | |
| 015 | 065 | D | B | |
| 016 | 066 | E | G | |
| 017 | 067 | E | R | |
| 018 | 068 | E | W | |
| 019 | 069 | E | Y | |
| 020 | 070 | E | B | |
| 021 | 071 | F | G | |
| 022 | 072 | F | R | |
| 023 | 073 | F | W | |
| 024 | 074 | F | Y | |
| 025 | 075 | F | B | |
| 026 | 076 | B | G | Gold |
| 027 | 077 | B | R | |
| 028 | 078 | B | W | |
| 029 | 079 | B | Y | |
| 030 | 080 | B | B | |
| 031 | 081 | C | G | |
| 032 | 082 | C | R | |
| 033 | 083 | C | W | |
| 034 | 084 | C | Y | |
| 035 | 085 | C | B | |
| 036 | 086 | D | G | |
| 037 | 087 | D | R | |
| 038 | 088 | D | W | |
| 039 | 089 | D | Y | |
| 040 | 090 | D | B | |
| 041 | 091 | E | G | |
| 042 | 092 | E | R | |
| 043 | 093 | E | W | |
| 044 | 094 | E | Y | |
| 045 | 095 | E | B | |
| 046 | 096 | F | G | |
| 047 | 097 | F | R | |
| 048 | 098 | F | W | |
| 049 | 099 | F | Y | |
| 050 | 100 | F | B | |

1/ For other than direct government procurement. For direct government stocking switch bodies and pushbuttons should be procured separately (see tables VI and VII).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:25Z
Check the source to verify that this is the current version before use.

TABLE VI. Part numbers for switch or indicator body only.

| Part number M22885/79- | | Circuit | Contacts |
|---|---|---|---|
| Solder terminals | PC terminals | | |
| 101 | 156 | 1 Pole | Silver |
| 102 | 157 | 1 Pole | Gold |
| 154 | 158 | 2 Pole | Silver |
| 155 | 159 | 2 Pole | Gold |
| 103 | --- | Indicator | |

TABLE VII. Part numbers for pushbutton only.

| Part number M22885/79- | | Lens style | Color code |
|---|---|---|---|
| Without dripproof seal | With dripproof seal | | |
| 153 | 128 | B | G |
| 104 | 129 | B | R |
| 105 | 130 | B | W |
| 106 | 131 | B | Y |
| 107 | 132 | B | B |
| 108 | 133 | C | G |
| 109 | 134 | C | R |
| 110 | 135 | C | W |
| 111 | 136 | C | Y |
| 112 | 137 | C | B |
| 113 | 138 | D | G |
| 114 | 139 | D | R |
| 115 | 140 | D | W |
| 116 | 141 | D | Y |
| 117 | 142 | D | B |
| 118 | 143 | E | G |
| 119 | 144 | E | R |
| 120 | 145 | E | W |
| 121 | 146 | E | Y |
| 122 | 147 | E | B |
| 123 | 148 | F | G |
| 124 | 149 | F | R |
| 125 | 150 | F | W |
| 126 | 151 | F | Y |
| 127 | 152 | F | B |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:25Z
Check the source to verify that this is the current version before use.

The margins of this specification are marked with vertical lines to indicate where modifications made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced Documents

MIL-A-8625
MIL-PRF-8805
MIL-PRF-8805/4
MIL-PRF-8805/109
MIL-PRF-22885

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

Review activities:
Army - AR, AV, MI
Navy - AS, MC, OS
Air Force - 19,99

(Project 5930-2006-068)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil/ .



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:25Z
Check the source to verify that this is the current version before use.