MILITARY SPECIFICATION SHEET

SWITCH, PUSH BUTTON, ILLUMINATED, 4-LAMP, SOLID MOUNT,
RFI SHIELDED, MOISTURE SEALED, HIGH IMPACT SHOCK RESISTANT

This amendment forms a part of MIL-S-22885/80E, dated 24 February 1984, and is approved for use by all Departments and Agencies of the Department of Defense

PAGE 3

* Figure 3, delete and substitute

"

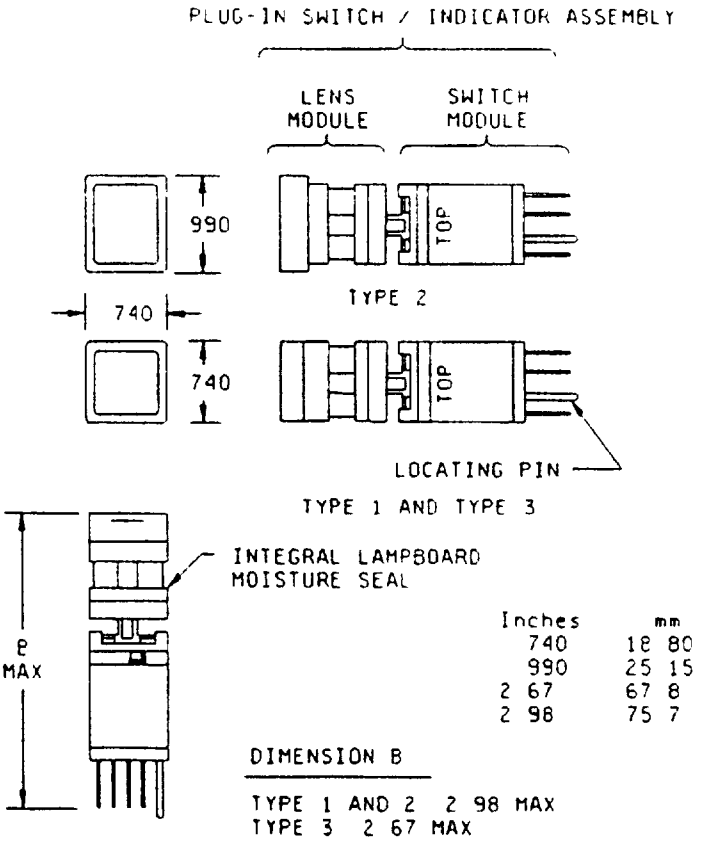

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerances are ± 016 (0 41 mm)
4. Location of RFI grounding contact is optional

FIGURE 3. Plug-in switch / indicator assembly

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS, EMI/RFI shielding, delete and substitute

"EMI/RFI shielding Grounded lens screen shall be provided Screen to mounting surface resistance shall not exceed 3 ohms EMI screen is not grounded during switch travel or in the depressed position "

The margins of this amendment are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - AV, MI
Air Force - 99
DLA - ES
Defense Nuclear Agency - DS

User activities
Army - AR
Navy - AS, MC, OS, SH
Air Force - 19

Preparing activity
Navy - EC

Agent
DLA - ES

(Project 5930-1512)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:25Z
Check the source to verify that this is the current version before use.