[INCH-POUND]

MIL-S-22885/78A(EC)
20 DECEMBER 1989
SUPERSEDING
MIL-S-22885/78(EC)
15 March 1971


# MILITARY SPECIFICATION SHEET

## SWITCH, PUSHBUTTON, ILLUMINATED, COLOR FILTER FOR

(A) [INACTIVE FOR NEW DESIGN AFTER 20 DEC 1989.]

This specification is approved for use by the Space and Naval Warfare Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-S-22885.

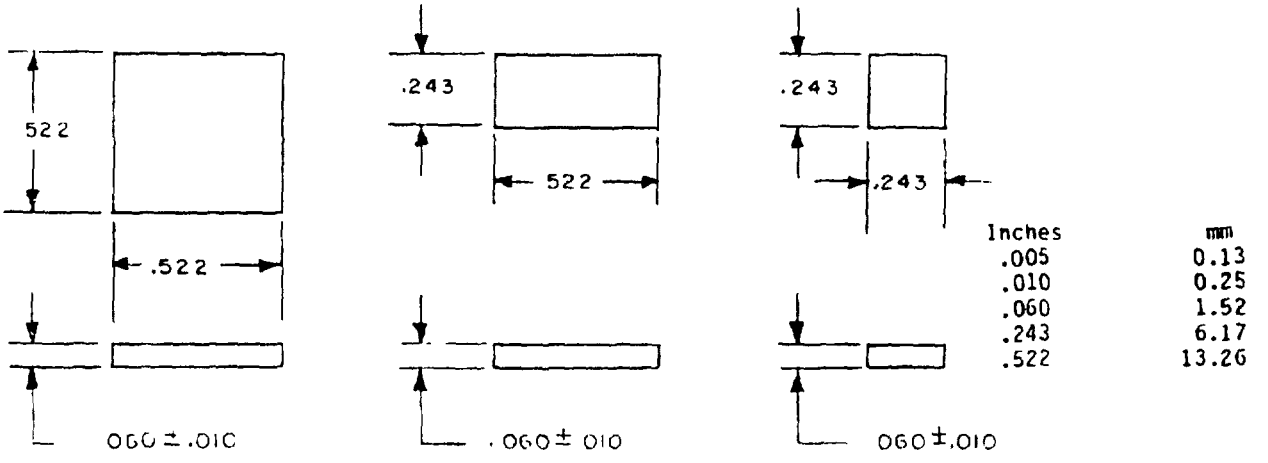


STYLE A STYLE B STYLE C

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3 Tolerance is ±.005 (.13 mm).

FIGURE 1. Design and construction

(A) denotes changes


DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction See figure 1.

Material. Acrylic in accordance with MIL-P-5425.

(A) Temperature characteristic: 1 (-55°C to +85°C).

(A) Intended use. For use with illuminated pushbutton switch in accordance with MIL-S-22885/77, display type W.

(A) Part or Identifying Number (PIN). See table I. The term Part or Identifying Number (PIN) is equivalent to the term part number which was previously used in this specification.

Inspection:

Group A Inspection for dimensions.

(A) Qualification and group B: As part of MIL-S-22885/77 switch inspection.

(A) Measurement of illuminated color and luminance. As part of MIL-S-22885/77 switch, display type W. See table II for chromaticity coordinates.

TABLE I. PIN's.

| PIN M22885/78- | Color | Code | Style |
|---|---|---|---|
| 001 | Blue | B | A |
| 002 | Green | G | A |
| 003 | Red | R | A |
| 004 | White | W | A |
| 005 | Yellow | Y | A |
| 006 | Amber | A | A |
| 007 | Blue | B | B |
| 008 | Green | G | B |
| 009 | Red | R | B |
| 010 | White | W | B |
| 011 | Yellow | Y | B |
| 012 | Amber | A | B |
| 013 | Blue | B | C |
| 014 | Green | G | C |
| 015 | Red | R | C |
| 016 | White | W | C |
| 017 | Yellow | Y | C |
| 018 | Amber | A | C |



Source: https://assist.dla.mil -- Downloaded: 202640-19T14:25Z
Check the source to verify that this is the current version before use.

TABLE II. Chromaticity coordinates.

| Chromaticity coordinates 1/ 2200° Kelvin | | |
|---|---|---|
| Colors | X | Y |
| Green | 0.350 | SL 2/ |
| | .350 | .610 |
| | .185 | .610 |
| | .265 | .720 |
| Yellow | 0.530 | 0.442 |
| | .544 | SL 2/ |
| | .571 | .402 |
| | .582 | SL 2/ |
| Red | 0.680 | 0.300 |
| | .690 | .310 |
| | .715 | .265 |
| | .725 | .275 |
| Amber | 0.565 | SL 2/ |
| | .540 | .430 |
| | SL 2/ | .365 |
| | .605 | .365 |
| Blue | 0.195 | 0.305 |
| | .065 | .250 |
| | .095 | .150 |
| | .225 | .220 |
| White | 0.484 Ref. | 0.415 Ref. |
| X is not less than .350. X is not greater than .540. $Y - Y_o$ or $Y_o - Y$ is not numerically greater than 0.03X. ($Y_o$ is the Y coordinate of the Planckian radiator for a given X). | | |

1/ The chromaticities of the diffusing lenses or colored filters expressed as X and Y coordinates on the CIE chromaticity diagram shall lie within areas bounded by the coordinates listed for each color, using a source illuminate of 2200°K.

2/ SL = spectrum locus (where intersected by other of coordinate pair).



Source: https://assist.dla.mil -- Downloaded: 202610-19T14:25Z
Check the source to verify that this is the currentersion before use.

CONCLUDING MATERIAL

Preparing activity
Navy - EC

Agent:
DLA - ES

(Project 5930-N672)



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:25Z
Check the source to verify that this is the current version before use.