MIL-A-58005B(ME)
13 April 1983
SUPERSEDING
MIL-A-58005A(ME)
19 July 1967

MILITARY SPECIFICATION

ANCHOR, MARINE, MUSHROOM: CAST STEEL, 5,000 LB. NOMINAL WEIGHT

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a 5,000-pound mushroom-type steel anchor with shackle.

2. APPLICABLE DOCUMENTS

2.1.1 Specifications and standards. Unless otherwise specified, the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

RR-C-271	- Chains and Attachments, Welded, and Weldless.
TT-V-51	- Varnish, Asphalt.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:58Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-889	- Dissimilar Metals.

(Copies of specifications and standards required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI/ASTM A27	- Mild-to Medium-Strength Carbon-Steel Castings for General Application.

(Application for copies should be addressed to the American National Standards Institute, 1430 Broadway, New York, NY 10018.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Description. The anchor shall be as shown in figure 1 and as specified herein. The mushroom and shank shall be cast integrally to form a single unit, with the vertical centerline of the shank at right angles to a horizontal line drawn across the rim of the mushroom on the concave side.

3.2 Material. Material shall be as specified herein. Material not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.3).

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:58Z
Check the source to verify that this is the current version before use.

3.2.1 Castings. Castings shall conform to ANSI/ASTM A27, grade 65-35, class 2.

3.2.2 Material deterioration and control. The anchor shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable storage and operating environment to which the item may be exposed.

3.2.3 Dissimilar metals. Dissimilar metals, as defined in MIL-STD-889, shall be electrically insulated from one another to minimize galvanic corrosion.

3.3 Shackle. Shackle shall conform to RR-C-271, type IV, class 6, 2-3/4 inch.

3.4 Weight. The anchor with shackle shall weigh not less than 5,000 pounds nor more than 5,300 pounds.

3.5 Identification marking. The anchor shall be identified in accordance with MIL-STD-130. Markings shall be 1/2 inch high and shall be cast on the concave surface of the mushroom not less than 6 inches from the outside rim.

3.6 Coating. The entire anchor surface shall be coated with two coats of black asphalt varnish conforming to TT-V-51. Varnish shall be applied by brushing or spraying; there shall be no bare or thin spots. The second coat shall be applied only after the first coat has thoroughly dried.

3.7 Workmanship. Roughness of surfaces mating with the shackle shall be not more than 250 microinches. Irregularities caused by variations in the tolerances shall be faired. Care shall be taken to insure concentricity and accuracy of form. Distortion or other flaws affecting the serviceability of the anchor shall be avoided.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:58Z
Check the source to verify that this is the current version before use.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications, and standards, as applicable.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Quality conformance inspection (see 4.3).

b. Inspection of packaging (see 4.5).

4.3 Quality conformance inspection.

4.3.1 Examination. Each anchor shall be examined for the defects specified in 4.4.1. Presence of one or more defects shall be cause for rejection.

4.4 Inspection procedure.

4.4.1 Examination. Each anchor shall be examined as specified herein for the following defects:

101. Nonconformance to the dimensions shown on figure 1.
102. Shackle not as specified.
103. Weight not as specified.
104. Identification marking not as specified.
105. Coating not as specified.
106. Workmanship not as specified.
107. Materials are not corrosion resistant or treated to be made corrosion resistant for the applicable storage and operating environment.
108. Dissimilar metals as defined in MIL-STD-889 are not effectively insulated from each other.

4.5 Inspection of packaging.

4.5.1 Quality conformance inspection of marking.

4.5.1.1 Unit of product. For the purpose of this inspection, anchor with shackle assembled, prepared for shipment shall be considered a unit of product.

4.5.1.2 Examination. Each anchor shall be examined for the following defect. Presence of the defect shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:58Z
Check the source to verify that this is the current version before use.

109. Marking not as specified (see 5.2).

5. PACKAGING

5.1 Preservation and packing. Not applicable, the anchors shall be shipped loose, unpacked.

5.2 Marking. In addition to any special or other identification markings required by the contract or purchase order (see 6.2), the anchors shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The anchor is intended for use in mooring operations.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Whether special marking is required (see 5.2).

6.3 Recycled material. It is encouraged that recycled material be used, when practical, as long as it meets the requirements of this specification (see 3.2).

Custodian:
Army - ME

Preparing activity:
Army - ME

Project 2040-A146

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:58Z
Check the source to verify that this is the current version before use.

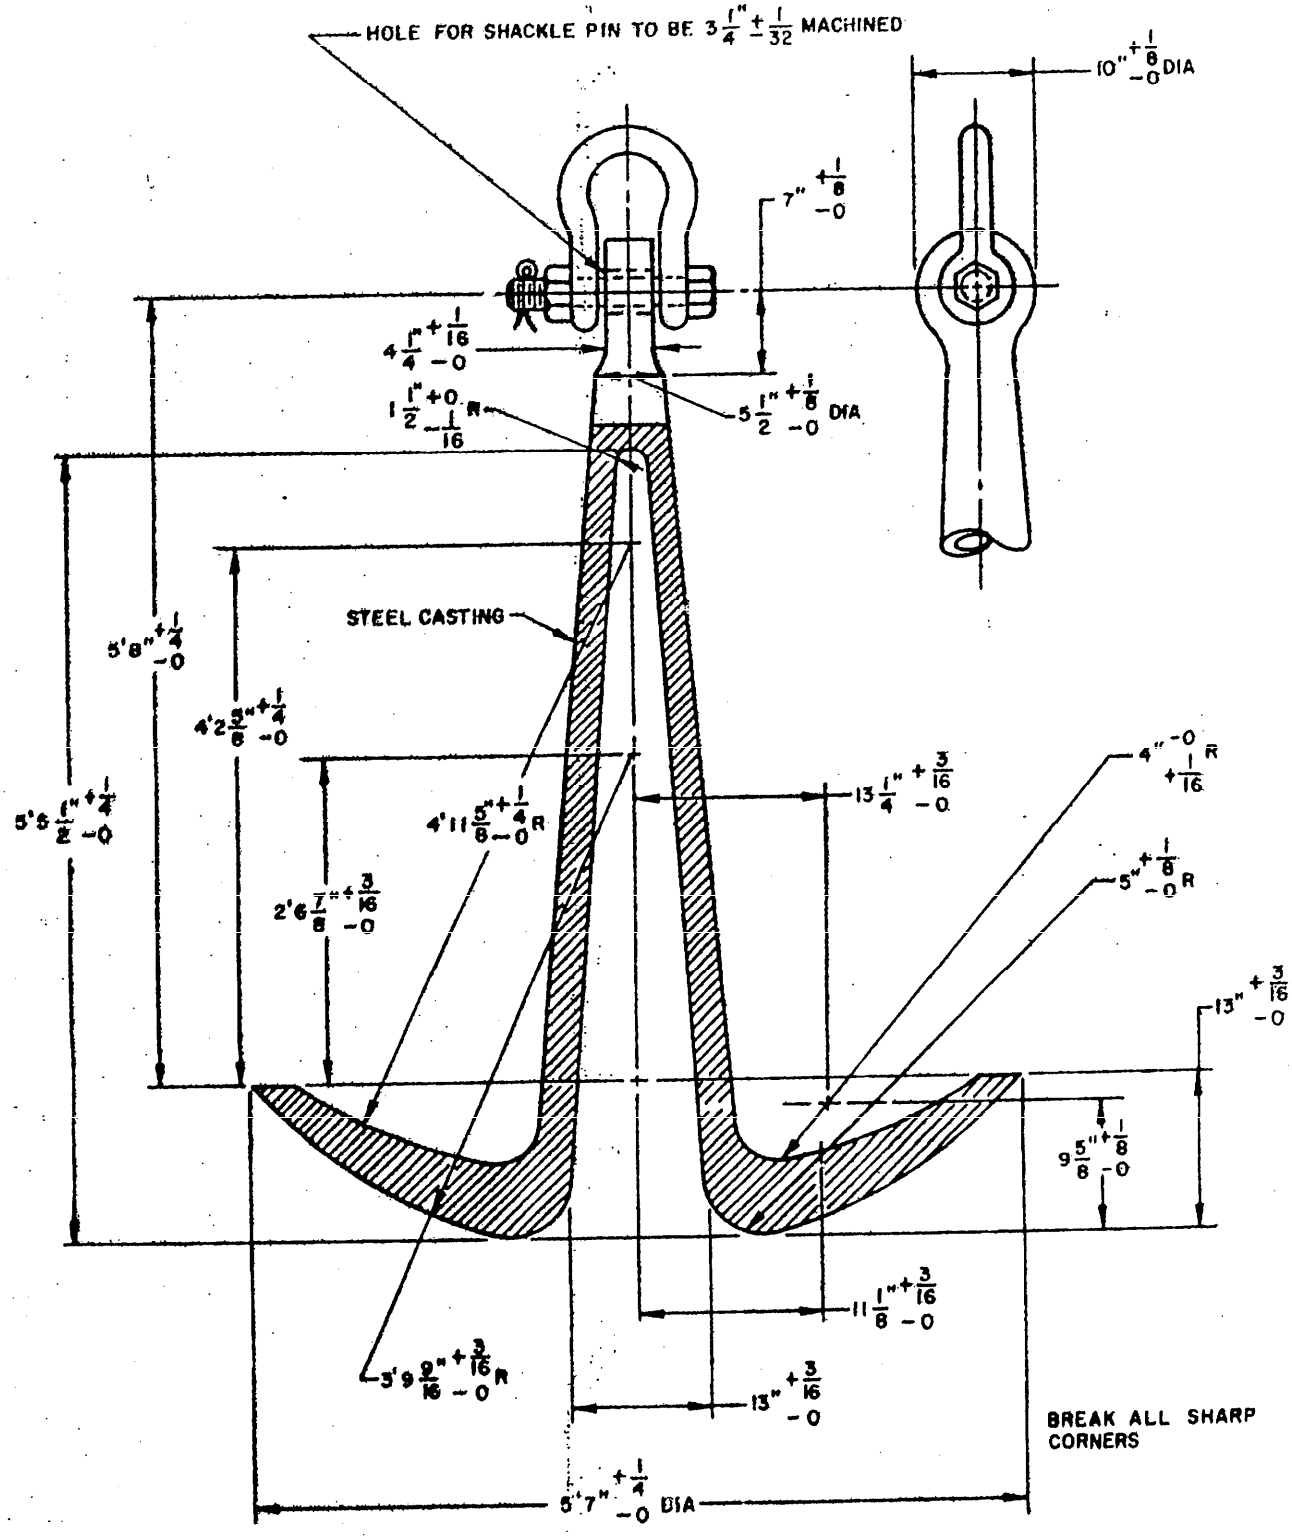


FIGURE 1. Anchor, marine, mushroom, cast steel, 5000 lb.

X-999A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:58Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-A-58005B(ME)	Anchor, Marine, Mushroom: Cast Steel, 5,000 Lb. Nominal Weight

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 20260-22123:58Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commanding Officer
Naval Publications & Forms Center
Code 1032
5801 Tabor Avenue
Philadelphia, PA 19120

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:58Z
Check the source to verify that this is the current version before use.