MILITARY SPECIFICATION
KIT, FILTER, INFRARED, INTERFERENCE TYPE
FOR
AN/TVS-3

1. SCOPE

1.1 This specification covers one type of infrared filter kit for use tieh the 20 KW xenon searchlight AN/TVS-3.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

GG-P-00455	- Plate, Photographic, Photosensitive Aluminum

MILITARY

MIL-M-13231	- Plate, Identification, Instruction and Marking, Blank
MIL-E-17555	- Electrical and Electronic Equipment and Associated Repair Parts, Preparation for Delivery of
MIL-F-55608(EL)	- Filter, Infrared, Interference Type for AN/TVS-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:41Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-595	- Colors

MILITARY

MIL-STD-22	- Welded Joint Designs
MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-171	- Finishing of Metal and Wood Surfaces

DRAWINGS

ECOM

DL-SC-59916	- Infrared Filter Kit for AN/TVS-3

(Copies of specifications, standards and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. - The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN WELDING SOCIETY

Standard Welding Symbols AWS.A2.0-58

(Application for copies should be addressed to American Welding Society, 435 East 47th Street, New York, New York 10016.)

NATIONAL BUREAU OF STANDARDS

Handbook H-28

(Application for copies should be addressed to National Bureau of Standards, Springfield, Virginia 22151.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:41Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Description. - The infrared filter kit shall consist of a complete front door assembly and a spare filter segment case containing 2 spare clear glass segments and 1 each inner and outer infrared (IR) filter segments. The front door assembly shall be equipped with infrared filter segments in lieu of the spread beam lenses normally provided. The filter shall conform to MIL-F-55608(EL). The segments shall be assembled in accordance with drawing SC-D-599916 using 2 coated glass panels in a sandwich type construction with the coatings on the inside surfaces, so that only uncoated glass is exposed to contact with environmental conditions such as rain, mud or snow, or cleaning solvents.

3.2 First Article Model. - The supplier shall furnish two complete filter kits within the time frame specified in the contract or purchase order to prove, prior to starting production, that his production methods will produce filter kits that comply with the requirements of this specification. Examination and tests shall be those specified herein. Any changes or deviations from the first article model shall be subject to the approval of the contracting officer. Approval of the first article model by the activity concerned shall not relieve the supplier of his obligation to furnish filter kits conforming to this specification.

3.3 Initial production. - Two filter kits selected from the first ten(10) filter kits produced from production tooling shall be examined and tested as specified in 4.4 to determine conformance to the requirements of this specification. Acceptance of initial production filter kits shall not establish the acceptability of the remainder of filter kits under contract in conflict with the acceptance levels specified in 4.4. These filters shall be fully representative of filter kits to be furnished under the contract.

3.4 Drawings. - The drawings forming a part of this specification are engineering design drawings. The supplier is responsible for preparing his own shop drawings. Where tolerances prescribed could cumulatively result in incorrect fits, the supplier shall provide tolerances within those prescribed on the drawings to insure correct fit, assembly and operation of the filter kit. No deviation from the prescribed dimensions or tolerances is permissible without prior approval of the contracting officer. In the event of conflict between the drawings and this specification this specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:41Z
Check the source to verify that this is the current version before use.

3.5 Materials and Components. - Materials and components shall be as specified herein and as shown on the applicable drawings. Materials and components not specified shall be selected by the contractor and shall be subject to all applicable provisions of this specification.

3.6 Visual Security. - Visual security of the infrared, interference-filter shall not exceed 1000 meters nor be less than 800 meters in accordance with 4.6.4.

3.7 Spectral transmission. - Spectral transmission of the usable and non-usable zones of the filter shall be as follows under temperature ranges of 70 to 80 degrees F and 295 to 305 degrees F.

3.7.1 Usable zone. - Spectral transmission of the usable zone shall be between the minimum and maximum values shown on figure 1 for any wavelength from 800 to 1100 millimicrons.

3.7.2 Non-Usable zone. - No spectral transmission is required of the non-usable zone, except that it shall meet requirements of 3.6.

3.8 Interference coating radiation exposure. - The spectral transmission of the filter shall meet requirements of 3.7, when tested in accordance with 4.6.1.

3.9 Operational conditions:

3.9.1 Temperature and Humidity.- The filter kit shall perform as specified herein, in any ambient temperature from minus 65 degrees F to plus 165 degrees F with maximum relative humidity.

3.9.2 Altitude. - The filter kit shall perform as specified herein at any altitude from sea level to 8,000 feet above sea level.

3.10 Storage and transit.

3.10.1 Temperature and Humidity. - The filter kit in its shipping container shall not be damaged by storage in any temperature from minus 80 degrees F to plus 165 degrees F for extended periods with maximum relative humidity.

3.10.2 Altitude. - The filter kit in its shipping container or installed on the searchlight shall not be damaged by transit in military aircraft, (unpressurized) at altitudes to 40,000 feet above sea level.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:41Z
Check the source to verify that this is the current version before use.

3.10.3 Ruggedness - The filter kit in its shipping container shall not be damaged by shipment by commercial freight service or in normal military usage.

3.11 Treatment and Painting. - All metal components of the filter kit shall be cleaned, treated and painted in accordance with the applicable drawings. Where not specified, the parts shall be cleaned, treated and painted in accordance with finish 5.2 plus 21.3 of MIL-STD-171, Color X34087 of Fed-Std-595.

3.12 Identification and Information Plates. - The filter kit shall be identified and marked in accordance with the applicable drawings, and MIL-M-13231. Information plates shall be made of material conforming to GG-P-00455, Grade A, class 1. The plates shall be permanently affixed in a conspicious place as directed by the contracting officer.

3.12.1 Instruction Plates. - An instruction plate shall be provided in accordance with the applicable drawings, describing procedures to be followed during assembly, operation , or servicing of the filter kit together with complete operating instructions, and shall be black background with white legend.

3.12.2 Warning Plates. - Warning plates shall be affixed to warn of any condition which could cause damage to components of the filter kit or injury to operating personnel and shall be red background with black legend.

3.13 Technical Publications. - Such technical publications as are specified shall be furnished (see 6.2).

3.14 Items Furnished with Filter Kits. - No shipment of filter kits shall be made unless repair parts, maintenance tools and technical publications as are specified (see 6.2) are included with the shipment or unless approval for shipment without such items had been received.

3.15 Screw Threads. - Screw threads shall conform to the National Bureau of Standards Handbook H-28. Mating threaded aluminum surfaces shall be treated prior to assembly with a silicone lubricant capable of withstanding temperatures for minus 80 degrees F to plus 350 degrees F to prevent galling and seizure of the threads.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:41Z
Check the source to verify that this is the current version before use.

3.16 Welded Joint Design. - Welded joint designs shall conform to MIL-STD-22. Welding shall conform to Standard Welding Practices as prescribed by the American Welding Society.

3.17 Workmanship. - Joints and seams shall be tight fit, shall have no sharp edges, burrs or protruding weld beads and shall be free of foreign matter. Optical surfaces shall be free of scratches or blemishes that could affect their optical qualities. The interior of the filter segment shall be free of foreign matter.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for Inspection. - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and Material Inspection. - The supplier is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards. The Government reserves the right to require the contractor to prove a stated requirement where no detailed test is specified.

4.2 Classification of Inspection. - Inspection shall be classified as follows:

a. First Article Inspection (see 4.3).

b. Initial Production Inspection (see 4.4).

c. Quality Conformance Inspection (see 4.5).

d. Inspection Comparison (see 4.7).

e. Inspection of Preparation for Delivery (see 4.8).

4.3 First Article Inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:41Z
Check the source to verify that this is the current version before use.

4.3.1 Examination. - Each filter kit shall be examined for defects in accordance with Table I. One or more defects shall be cause for rejection.

TABLE I EXAMINATION

MAJOR		REQUIREMENT PARAGRAPH
101.	Absence of any part or component	3.4
102.	Interference coating notaapplied to full usable zone of filter	3.4
MINOR		
201.	Dimensions not as specified	3.4
202.	Material not as specified	3.5
203.	Treatment and painting not as specified	3.11
204.	Absence or incorrectness of identification markings	3.12
205.	Welding not as specified	3.16
206.	Threads not as specified	3.15
207.	Workmanship not as specified	3.17

4.3.2 Tests. - Upon successful completion of the examination specified in Table I the first article models shall be subjected to the tests in Table II. Tests shall be conducted in the order listed. Failure of any test shall be cause for rejection.

TABLE II FIRST ARTICLE MODEL TEST SCHEDULE

TEST	TEST PARAGRAPH	REQUIREMENT PARAGRAPH
Spectral Transmission of Filter	4.6.1	3.7
Temperature and Humidity	4.6.2	3.9.1, 3.10.1
Altitude	4.6.6	3.9.3, 3.10.2
Interference Coating Radiation Exposure	4.6.3	3.8
Visual Security	4.6.4.1	3.6
Ruggedness	4.6.5	3.10.3

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:41Z
Check the source to verify that this is the current version before use.

4.4 Initial Production Inspection. - When specified (see 3.3) two initial production filter kits will be selected at random by the Government from the first 10 filter kits being produced from production tooling and shall be examined as specified in Table I and shall be tested as specified in Table II to determine conformance to the requirements of this specification. The inspection will be performed by the contractor under the supervision of a representative of the contracting officer. Acceptance of any initial production filter kit shall not exclude the remaining filter kits from the quality conformance inspection and acceptance provisions specified.

4.4.1 Inspection Failure. - Failure of an initial production filter kit to meet any requirement specified herein during and as a result of the examination and tests specified in 4.4 shall be cause for rejection of the initial production filter kits and shall be cause for refusal by the Government to continue acceptance of production filter kits until evidence has been provided by the supplier that corrective action has been taken to eliminate the deficiencies. Correction of such deficiencies shall be accomplished by the supplier at no cost to the Government on filter kits previously accepted and produced under the contract. Any deficiencies found as a result of the initial production inspection will be considered prima facie evidence that all filter kits accepted prior to the completion of initial production inspection are similarly deficient unless evidence to the contrary is furnished by the supplier and such evidence is acceptable to the contracting officer.

4.5 Quality Conformance Inspection.

4.5.1 Examination. - Each filter kit shall be examined as specified in Table I. Presence of one or more defects shall be cause for rejection.

4.5.2 Tests.

4.5.2.1 Group A. - Each filter kit shall be tested in accordance with Table III. Failure of any test shall be cause for rejection.

TABLE III GROUP "A" TEST SCHEDULE

TEST	TEST PARAGRAPH	REQUIREMENT PARAGRAPH
Visual Security	4.6.4,2.2	3.6

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:41Z
Check the source to verify that this is the current version before use.

4.5.2.2 Group B. - Group B test shall be conducted on filter kits selected from units which have passed the examination and tests in 4.5.1 and 4.5.2. Sampling shall be in accordance with MIL-STD-105, AQL 2.5 percent defective, inspection level S-2. Tests shall be conducted in accordance with Table IV, and may be performed in any sequence. Failure of any test shall be cause for rejection.

TABLE IV GROUP "B" TEST SCHEDULE

TEST	TEST PARAGRAPH	REQUIREMENT PARAGRAPH
Spectral Transmission (to be conducted at 70 degrees to 80 degrees F)	4.6.1	3.7

4.5.2.3 Group C. - This inspection shall consist of the tests specified in Table V and shall be performed on sample units that have been subjected to and met groups A and B inspection. Sample units shall be selected in accordance with 4.5.2.3.1. Failure of any test shall be cause for rejection.

4.5.2.3.1 Sampling for Inspection. - One sample filter kit shall be selected at random for all inspections in Table V from each lot of 100 filter kits produced or every sixty days, whichever occurs first. The first samples selected shall be at the start of the contract from the first quality conformance inspection production lot.

TABLE V GROUP "C" TEST SCHEDULE

Environmental	4.6.2	3.9, 3.10
Interference Coating Radiation Exposure	4.6.3	3.8

4.5.2.3 Noncompliance. - The contractor shall immediately report in writing each group C failure occurrence, including details of the failure and characteristics affected. The contractor shall immediately investigate the cause of failure and further report the results of investigation and details of the proposed corrective action on (i) the process and materials as applicable, and (ii) all units of product which were manufactured under the same conditions and which the Government considers subject to the same failure. Reports shall be forwarded to the responsible technical

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:41Z
Check the source to verify that this is the current version before use.

activity designated in the contract through the Quality Assurance Representative. After corrective action has been taken, additional sample units shall be subjected to group C inspection (all inspections, or the inspections which the sample failed, at the option of the Government) and groups A and B inspection may be reinstituted;however, final acceptance and shipment will be withheld until the group C reinspection results have shown that the corrective action was effective.

4.5.3 Reinspection of Conforming Group B and Group C Sample Units. - Unless otherwise specified, sample units which have been subjected to and passed both group B and group C inspection may be accepted on contract or order provided all damage is repaired and the sample units are resubjected to and pass group A inspection.

4.6 Test Procedures. - Tests required to determine compliance with this specification shall be conducted in accordance with the test procedures specified herein. All meters used during tests shall have been calibrated within 30 days prior to the start of testing, and thereafter as required, and at intervals not to exceed 6 months. Spectral transmission measurements shall be made using a spectrophotometer calibrated to read wavelength within plus or minus 1 millimicron from 400 millimicrons to 1,100 millimicrons. For any wavelength from 400 millimicrons to 1,100 millimicrons, the spectrophotometer shall be calibrated to read the transmission within plus or minus 3 percent for any wavelength. The spectrophotometer shall be capable of measuring transmission from 100 percent to 0.01 percent from 400 millimicrons to 1,100 millimicrons. Ambient temperatures and operating temperatures during environmental testing shall be recorded using recording instruments having not less than 1.0 percent accuracy.

4.6.1 Spectral Transmission. - The spectral transmission of the infrared filter segments shall be measured at not less than four points and at 90 degrees from the surface of the filter. Spectral transmission measurements shall be made with the outside surface of the filter at 70 degrees to 80 degrees F and again at 300 degrees F or equilibrium temperature attained in an approved searchlight sub-assembly. The spectral transmission curves for each point measured on the filter shall be plotted on one sheet of 5-cycle. semi-log graph paper. Any apparent shift of spectral transmission shall be recorded and compared with figure 1. Failure to meet the spectral transmission requirements of figure 1 or any apparent shift in excess of the limits specified in figure 1 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:41Z
Check the source to verify that this is the current version before use.

4.6.2 Temperature and Humidity. - The filter kit shall be exposed to an ambient temperature of 165 degrees F plus or minus 10 degrees F for four hours and then examined for damage. The filter kit shall then be exposed to an ambient temperature of minus 80 degrees F plus or minus 5 degrees F for a period of 4 hours. At the end of the four hours the temperature shall be raised to minus 65 degrees F plus or minus 5 degrees F and maintained for 2 hours. At the end of the 2 hours the temperature shall be raised within 10 minutes to 300 degrees F plus or minus 10 degrees F and maintained for 45 minutes. The filter kit shall then be cooled to 70 degrees minus 75 degrees F and examined for damage. Any evidence of damage shall constitute failure of this test.

4.6.3 Interference Coating Radiation Exposure. - The filter kit shall be exposed to the radiation from a 20 KW xenon lamp in a mechanism simulating the searchlight conforming to MIL-S-55572(EL) for 20 hours maintaining the outside filter temperature at 250 to 300 degrees F. After 20 hours of exposure to the lamp radiation the coating shall be examined for pinholing or cracking and the spectral transmission of the usable zone of the filter kit shall be tested in accordance with 4.6.1 with the filter at a temperature of plus 250 degrees to 300 degrees F. The filter shall then be cooled to a temperature of plus 70 to 80 degrees F, and the spectral transmission of the filter shall again be tested in accordance with 4.6.1. Any evidence of pinholes or cracking developing during this test or change in spectral transmission beyond the limits prescribed in figure 1 shall constitute failure of this test.

4.6.4 Visual Security.

4.6.4.1 First Article. - The filter door assembly shall be mounted on a mechanism simulating a searchlight conforming to MIL-S-55572(EL). The mechanism shall be operated on a suitable outdoor range at night with ambient light conditions not to exceed 1×10^{-4} foot candle at the 20 KW power level for 30 minutes prior to determining the visual - security distance: Three observers having normal or corrected 20/20 vision and having no defects of vision which would affect the validity of the test shall be dark adapted for at least 30 minutes while the filter is temperature stabilizing. After the dark adaptation period, each observer shall look at the filter in the center of the beam from a point not less than 1200 meters from the searchlight. Each observer shall then walk toward the searchlight to decrease the distance between himself and the light until the light can be detected by visual observation. The point where each

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:41Z
Check the source to verify that this is the current version before use.

observer can see the light shall be marked and the distance measured from this point to the filter. An average of the three distances greater than 1000 meters or less than 800 meters shall constitute failure of this test. The filter kit shall then be removed from the test mechanism and placed on a test fixture over a variable intensity light source, located at the focal point of a reflector conforming to MIL-R-52351A. The observers shall be placed 20 feet from the surface of the filter and the room darkened for not less than 30 minutes to enable the observers to become dark adapted. The light source shall be turned on and the light intensity increased until 2 of the 3 observers can detect the light through the filter. The light level shall be measured and recroded.

4.6.4.2 Group A Test. - The filter kit shall be installed on the test fixture used in 4.6.4.1 and the light level raised to the level recorded in 4.6.4.1. Three observers having no defects of vision which would affect the validity of this test shall be located not less than 30 feet from the surface of the filter kit and the room shall be darkened for 30 minutes. The observers shall walk slowly toward the filter kit until the light is detected. The point where each observer can see the light shall be marked and the distance measured from this point to the filter. An average distance greater than 22 feet or less than 18 feet shall constitute failure of this test.

4.6.5 Ruggedness. - The filter kit shall be placed in the bed of a standard military truck, 2-1/2 ton and the truck shall be driven over the Munson Test Course at Aberdeen Proving Grounds for 5 laps and for not less than 400 miles over Class A Highway. Upon completion of this test the filter kit shall be examined for damage (see 6.3). Any evidence of broken or deformed parts or glass sections, or loose or missing hardware shall constitute failure of this test.

4.6.6 Altitude. - The filter kit shall be placed in a test chamber. The air pressure in the test chamber shall be reduced to the value corresponding to 40,000 feet above sea level and the ambient air temperature and pressure shall be maintained for a period of 4 hours. After 4 hours the temperature shall be raised to 70 to 80 degrees F and the air pressure increased to the value corresponding to ambient altitude within one hour and the filter kit shall be examined for damage. The air pressure shall then be reduced to the value corresponding to 8,000 feet above sea level and the ambient air temperature increased to 300 ° F plus or minus 5 degrees F. This temperature and air pressure shall be maintained for 4 hours. After 4 hours the air pressure shall be returned to ambient altitude and the temperature shall be reduced to 70 to 80 degrees F within one hour and the filter kit shall be examined for damage. Any evidence of damage shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:41Z
Check the source to verify that this is the current version before use.

4.7 Inspection comparison. - The Government may select parts, assemblies, or complete filter kit at any time during the contract period and subject the parts, assemblies or complete filter kit to the examination specified in Table I and the applicable tests specified in Table II to reveal any manufacturing deficiencies and for conformance to prescribed requirements. The tests will be performed by the Government at a site selected by the Government.

4.7.1 Failure. - Failure of any part, assembly or complete filter kit when examined and tested as specified, shall be cause for refusal by the Government to continue acceptance of parts, assemblies or complete filter kit until objective evidence has been provided by the contractor that the deficiency has been corrected.

4.8 Inspection of Preparation for Delivery. - Packaging, packing, and marking as specified in 5.1 shall be inspected as specified in MIL-E-17555. Failure to meet the requirement of MIL-E-17555 shall constitute failure of this test.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, packing and marking. - Filter kits shall be protected, packaged, and marked in accordance with MIL-E-17555 for level A or C packaging specified (see 6.2) and level A, B or C packing as specified (see 6.2).

6. NOTES

6.1 Intended Use. - The infrared filter kit is intended for use on the 30 Inch Searchlight AN/TVS-3 for surveillance of a combat area at night using infrared viewing devices.

6.2 Ordering Data. - Procurement documents should specify the following:

a. Title and date of this purchase description.

b. Technical publications required (see 3.14).

c. List of repair parts and maintenance tools (see 3.15).

d. Level of preservation and packaging and level of packing(see 5.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:41Z
Check the source to verify that this is the current version before use.

6.3 Damage. - Damage is defined as chipping, breaking, pitting, cracking or peeling.

CUSTODIAN:

ARMY - EL

PREPARING ACTIVITY:

ARMY - EL

Project 5855-A017

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:41Z
Check the source to verify that this is the current version before use.

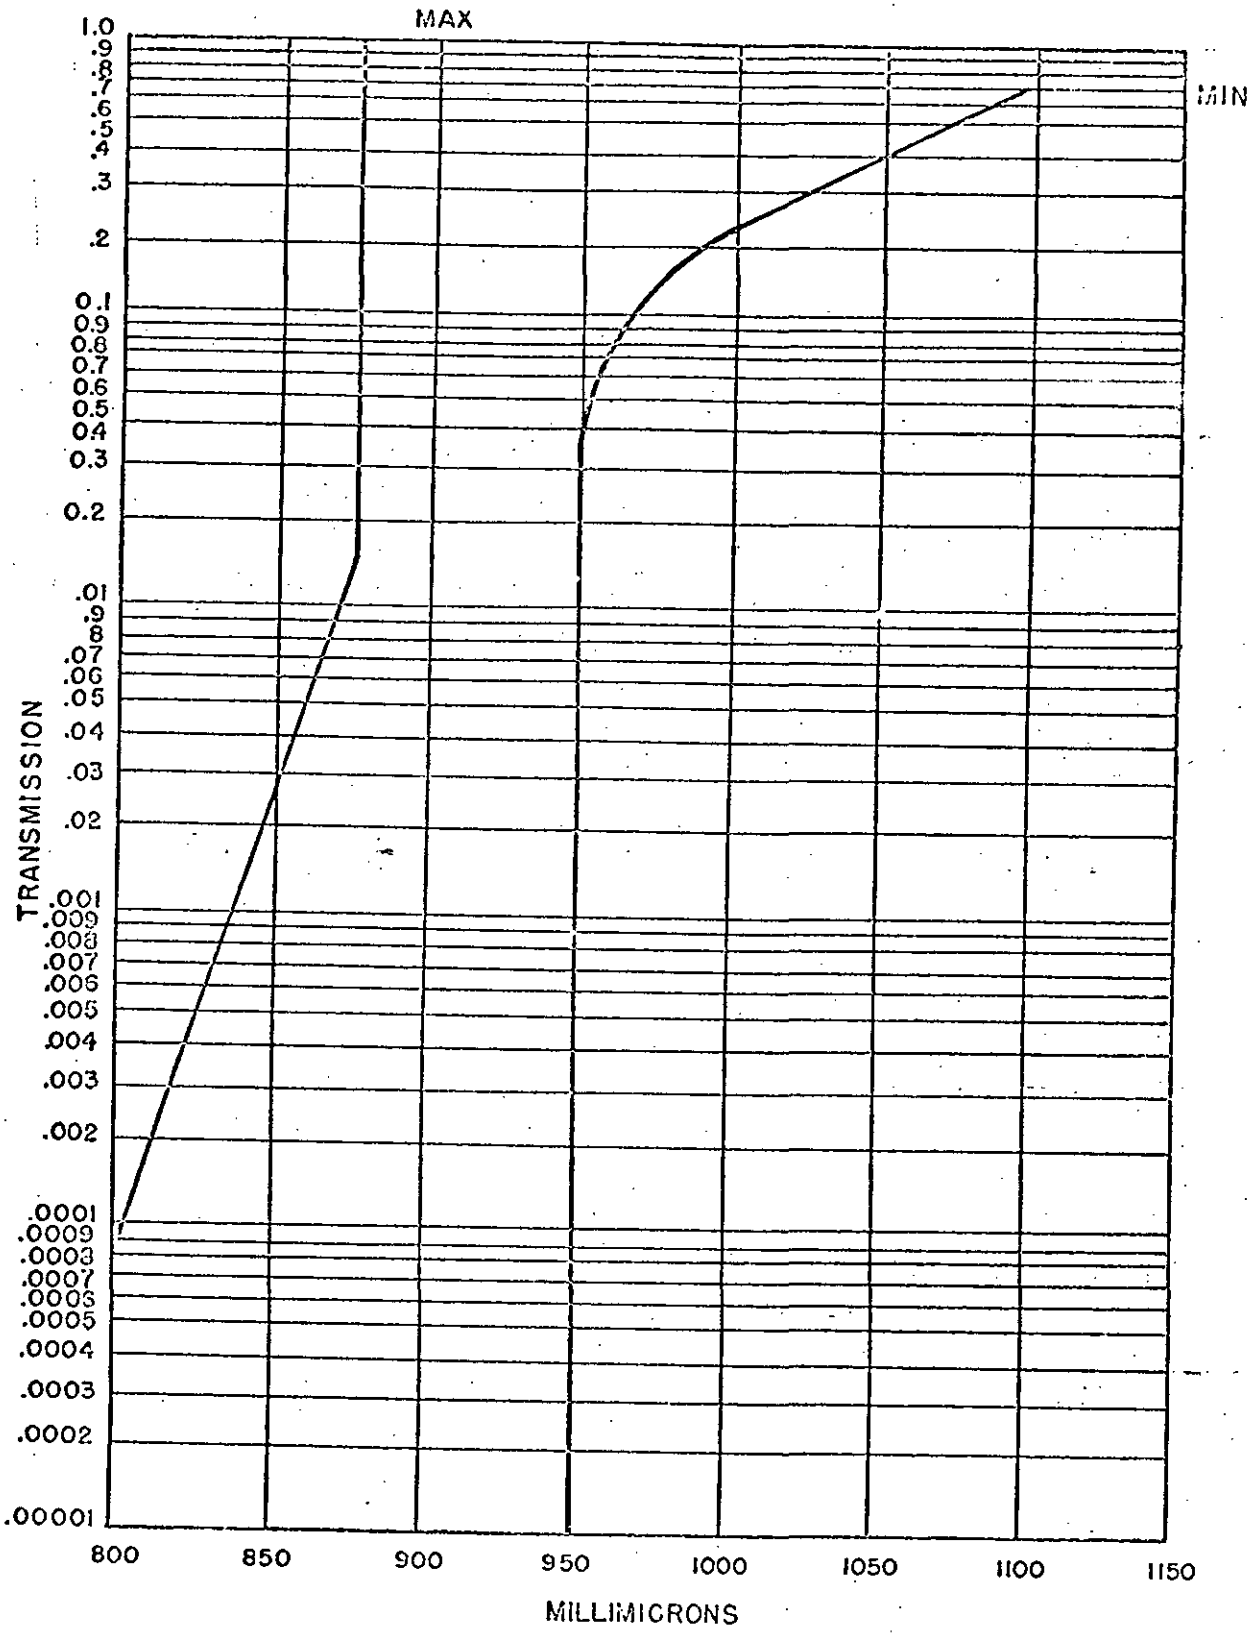


FIG. 1 VISUAL SECURITY SPECIFICATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:41Z
Check the source to verify that this is the current version before use.

To detach this form, cut along this line

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION
MIL-K-55609(EL) Kit, Filter, Infrared, Interference Type for AN/TVS-3

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?
   ☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

ESC-FM 1068-68

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:41Z
Check the source to verify that this is the current version before use.