MILITARY STANDARD

MIL-STD-1322-108
(NAVY)
8 JULY 1992


UNIT LOAD
FOR DOMESTIC AND OVERSEAS SHIPMENT
TASK "A" ASSY TEST CHARGES
ON WOODEN SKID WITH COVER & END FRAME ASSY'S
(8 OR 16-PACK UNIT LOADS)

UNIT LOAD DATA

GROSS WEIGHT OF (8) UNITIZED TEST CHARGES	544 LBS.
GROSS WEIGHT OF WOOD SKID & PARTS (8-PACK)	170 LBS. (APPROX)
GROSS WEIGHT OF WOOD SKID & PARTS (16-PACK)	183 LBS. (APPROX)
GROSS WEIGHT OF UNIT LOAD (8-PACK)	714 LBS. △
GROSS WEIGHT OF UNIT LOAD (16-PACK)	1,271 LBS. △
CUBE (8-PACK)	26.89 CU/FT.
CUBE (16-PACK)	40.18 CU/FT.

△ DO NOT USE FOR SHIPPING WEIGHT

FOR HAZARD CLASSIFICATION
SEE NAVSEA OP2165

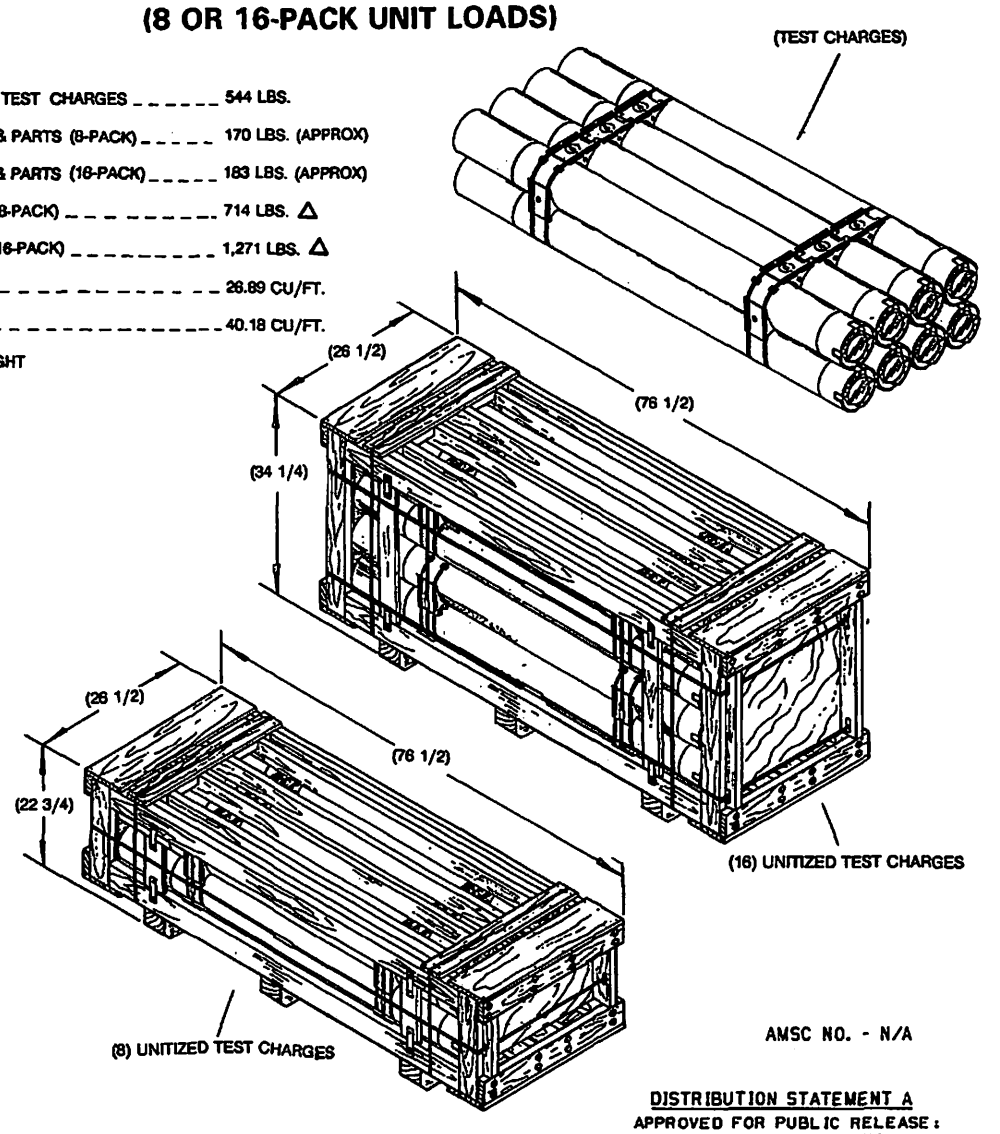

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

REV LTR	REVISION DESCRIPTION	DATE	TDA	SYSCOM
			APPROVAL	

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR DEPOT HANDLING AND STORAGE AND FOR SHIPMENT BY COMMON CARRIER.

Ernest A. Ponicki 7-7-92
SIGNATURE TDA, WPNSTA EARLE DATE


7-8-92
SIGNATURE SEASYSCOM BY DIRECTION DATE

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1322 (NAVY).

ORIGINATOR 7/8/92
DATE


WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 202640-23T23:54Z
Check the source to verify that this is the currenversion before use.

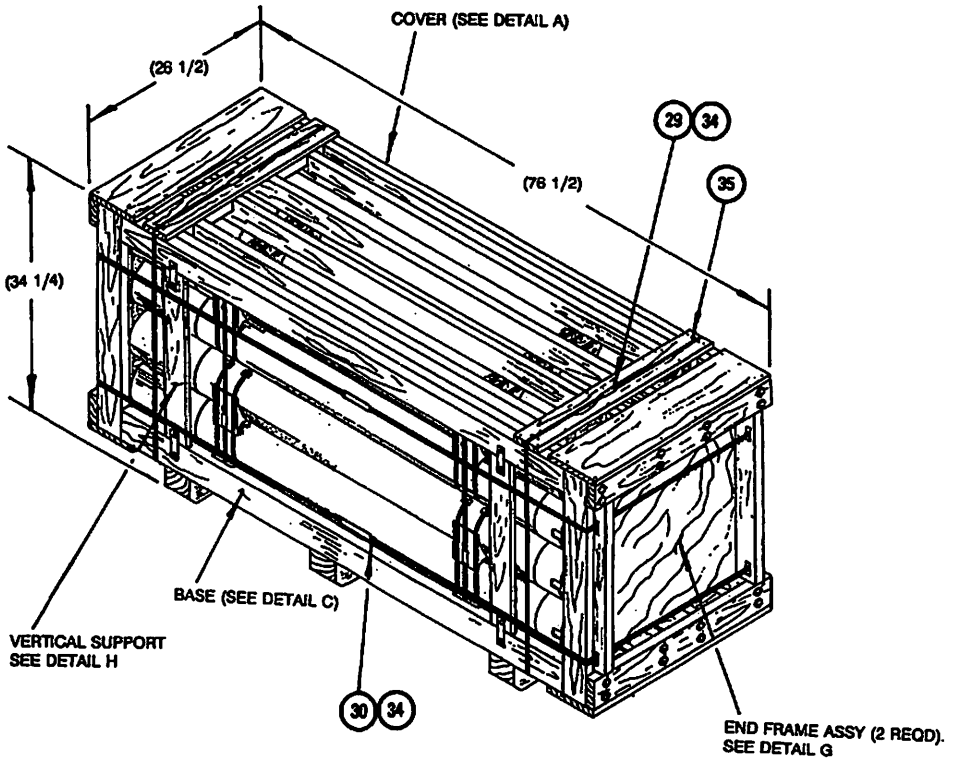

FOR PICTORAL AND UNITIZING PROCEDURES
SEE PAGES 3 & 4.

16-PACK UNIT LOAD

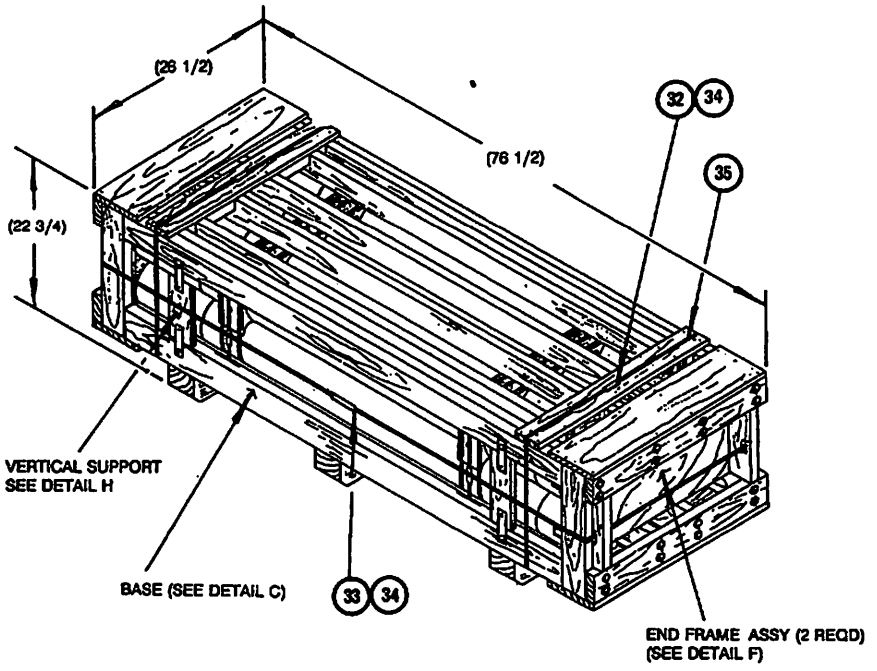


8-PACK UNIT LOAD

Source: https://assist.dla.mil -- Downloaded: 202610-23T23:54Z
Check the source to verify that this is the current version before use.

PICTORIAL SEQUENCE FOR 16-PACK UNIT LOAD

NOTE:

FOR UNITIZING ONE 8-PACK, REPEAT PICTORIAL SEQUENCE AS SHOWN, EXCEPT OMIT ONE UNITIZED 8-PACK LOAD AND USE THE SMALLER END FRAME ASSY (DETAIL F) IN LIEU OF THE LARGER END FRAME ASSY (DETAIL G). FOR STRAPPING PROCEDURES SEE PAGE 4

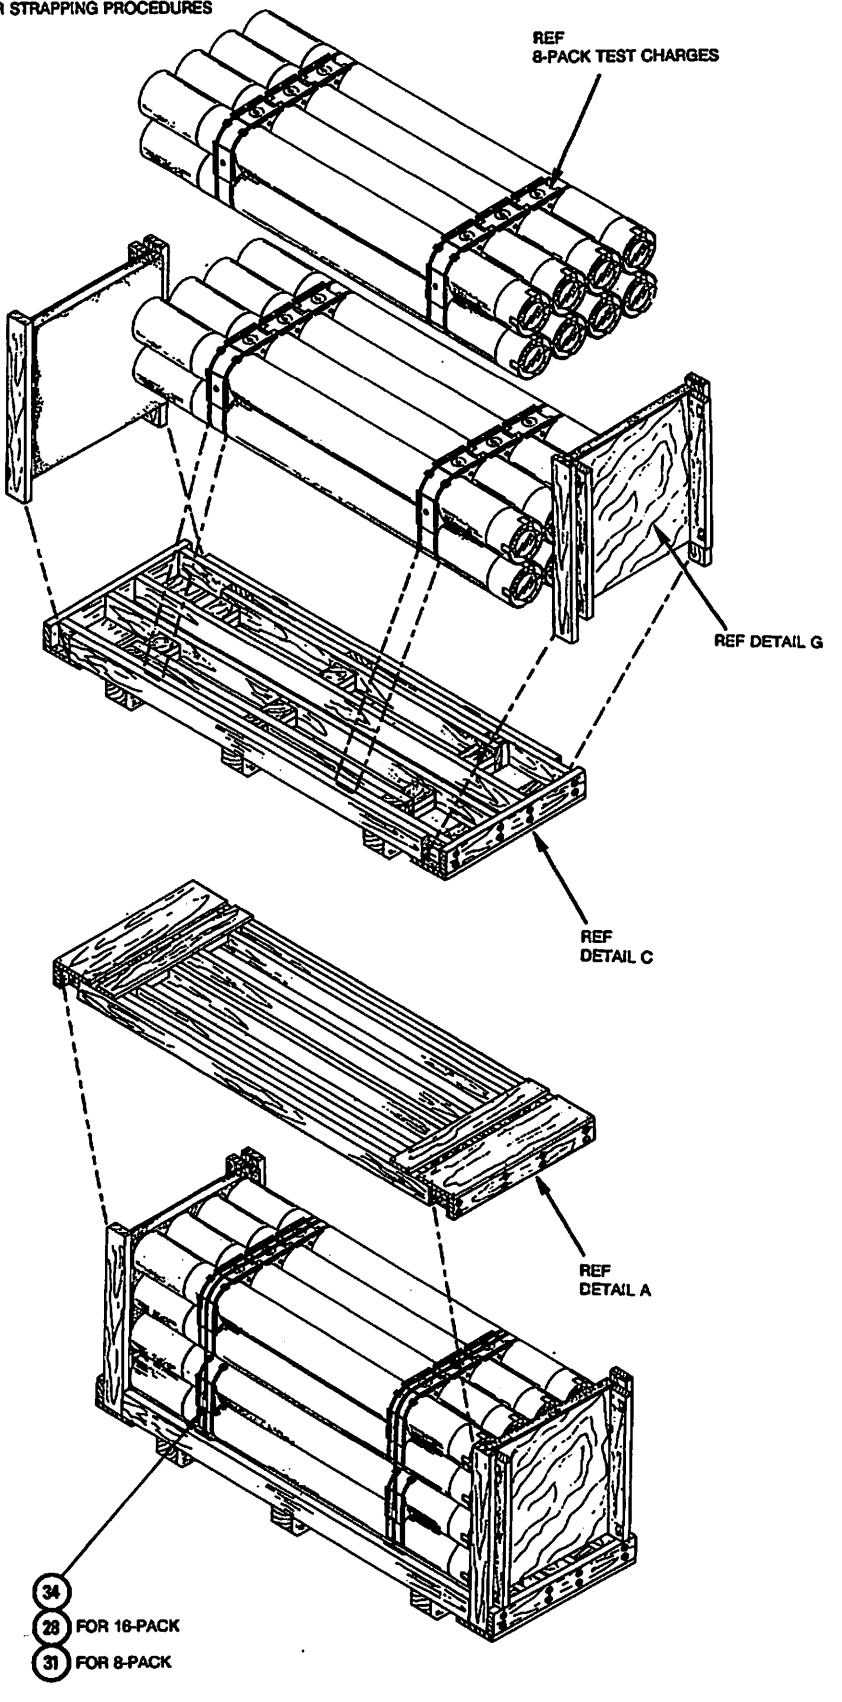

Source: https://assist.dla.mil -- Downloaded: 202610-23T23:54Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURE (TWO 8-PACKS)

1. USING LIFTING TOOL ASSEMBLY #0112100A, CAREFULLY STACK ONE 8-PACK OF CANISTERS ON BASE ASSEMBLY. LIFTING FEATURES ON 8-PACK SHOULD BE ALIGNED WITH SLOTS ON BASE AS SHOWN.
2. USING THE SAME LIFTING ASSEMBLY, CAREFULLY STACK A SECOND 8-PACK OF CANISTERS ON TOP OF THE FIRST ONE. BE SURE TO ALIGN THE LIFTING/STACKING FEATURES.
3. POSITION TWO LARGE END FRAMES (DETAIL G) INTO SLOTS WITH FOAM FACING TOWARD THE CANISTERS.
4. PLACE TWO LATERAL STRAPS, ITEM 28, THROUGH SLOTS, UNDER BASE ASSEMBLY, AND OVER STACKING FEATURES OF CANISTERS AS SHOWN. TENSION AND SECURE EACH STRAP WITH ONE DOUBLE NOTCHED SEAL, ITEM 34.
5. POSITION COVER ASSEMBLY (DETAIL A) OVER CANISTERS, ALIGNING SLOTS ON COVER WITH THE END FRAMES AS SHOWN.
6. POSITION VERTICAL SUPPORT, ITEM 38, IN LINE WITH BASE SKIDS AND SNUG UNDER COVER. SCREW SUPPORT INTO BASE AND COVER WITH (1) DRYWALL SCREW, ITEM 40, 4PL IN BASE AND 4PL IN COVER AS SHOW IN DETAIL H.
7. POSITION STRAPS, ITEM 29, OVER STACKING FEATURES, ITEM 7, OF COVER ASSEMBLY AND UNDER BASE ASSEMBLY AS SHOWN. TENSION AND SECURE EACH STRAP WITH ONE DOUBLE NOTCHED SEAL, ITEM 34.
8. PLACE TWO LONGITUDINAL STRAPS, ITEM 30, THROUGH SLOTS ON END FRAMES AND AROUND LOAD AS SHOWN. TENSION AND SECURE EACH STRAP WITH ONE DOUBLE NOTCHED SEAL, ITEM 34.
9. CONSTRUCTION OF END FRAMES, BASE, AND COVER ASSEMBLIES IS SHOWN ON PAGES 5 THRU 7
10. SECURE STRAPPING, ITEM 29, TO STACKING FEATURE WITH ONE STAPLE, ITEM 35, ON EACH END.


UNITIZING PROCEDURE (ONE 8-PACK)

1. USING LIFTING TOOL ASSEMBLY #0112100A, CAREFULLY STACK ONE 8-PACK OF CANISTERS ON BASE ASSEMBLY. LIFTING FEATURES ON 8-PACK SHOULD BE ALIGNED WITH SLOTS ON BASE AS SHOWN.
2. POSITION TWO SMALL END FRAMES (DETAIL F) INTO SLOTS WITH FOAM FACING TOWARD THE CANISTERS.
3. PLACE TWO LATERAL STRAPS, ITEM 31, THROUGH SLOTS, UNDER BASE ASSEMBLY, AND OVER STACKING FEATURES OF CANISTERS AS SHOWN. TENSION AND SECURE EACH STRAP WITH ONE DOUBLE NOTCHED SEAL, ITEM 34.
4. POSITION COVER ASSEMBLY (DETAIL A) OVER CANISTERS, ALIGNING SLOTS ON COVER WITH THE END FRAMES AS SHOWN.
5. POSITION VERTICAL SUPPORT, ITEM 37, IN LINE WITH BASE SKIDS AND SNUG UNDER COVER. SCREW SUPPORT INTO BASE AND COVER WITH (1) DRYWALL SCREW, ITEM 40, 4PL IN BASE AND 4PL IN COVER AS SHOWN IN DETAIL H.
6. POSITION STRAPS, ITEM 32, OVER STACKING FEATURES, ITEM 7, OF COVER ASSEMBLY AND UNDER BASE ASSEMBLY AS SHOWN. TENSION AND SECURE EACH STRAP WITH ONE DOUBLE NOTCHED SEAL, ITEM 34.
7. PLACE ONE LONGITUDINAL STRAP, ITEM 33, THROUGH SLOTS ON END FRAMES AND AROUND LOAD AS SHOWN. TENSION AND SECURE EACH STRAP WITH ONE DOUBLE NOTCHED SEAL, ITEM 34.
8. CONSTRUCTION OF END FRAMES, BASE, AND COVER ASSEMBLIES IS SHOWN ON PAGES 5 THRU 7
9. SECURE STRAPPING, ITEM 32, TO STACKING FEATURES WITH ONE STAPLE, ITEM 35, ON EACH END.


Source: https://assist.dla.mil -- Downloaded: 202610-23T23:54Z
Check the source to verify that this is the current version before use.

SUGGESTED NAILING PROCEDURE (COVER):


1. NAIL STACKING FEATURE, ITEM 7, TO SPACER BOARDS, ITEM 5, AS SHOWN IN VIEW B. USE 4-6d NAILS PER JOINT.
2. PLACE TWO DECK BOARDS, ITEM 2, ON TOP OF ITEM 7 AND SNUG AGAINST ITEM 5. BE SURE TO MAINTAIN THE 9 5/8" OVERHANG INDICATED IN VIEW B. NAIL DECK BOARDS TO SPACERS, ITEM 5, W/2-10d NAILS PER JOINT.
3. PLACE DECK BOARDS, ITEM 4, ON TOP OF ITEM 7 AND FLUSH AGAINST ITEM 5. NAIL DECK BOARDS TO ITEM 5 W/2-10d NAILS PER JOINT.
4. PLACE SPACER BOARDS, ITEM 3, ON TOP OF ITEM 7 AND FLUSH AGAINST ITEM 4. NAIL SPACER BOARDS, ITEM 3, TO ITEM 4 W/3-8d NAILS PER JOINT.
5. PLACE TWO DECK BOARDS, ITEM 2, ON TOP OF ITEM 7 AND SNUG AGAINST ITEM 3. BE SURE TO MAINTAIN THE 9 5/8" OVERHANG AS REQUIRED IN STEP 2. NAIL DECK BOARDS TO ITEM 3 W/2-10d NAILS PER JOINT.
6. NAIL DECK BOARD, ITEM 1, TO ITEM 2 W/1-10d NAIL EVERY 8 INCHES.
7. SECURE END BOARDS, ITEM 6, TO ENDS OF DECK BOARDS, ITEM 2, WITH TWO LAG BOLTS, ITEM 9, PER JOINT. USE ONE WASHER, ITEM 10, PER BOLT. CENTRALLY LOCATE BOLTS INTO ENDS OF DECK BOARDS, ITEM 2.
8. TURN BASE ASSEMBLY OVER AND NAIL DECK PLATE, ITEM 8, TO ITEMS 1, 2, AND 6. USE 10d NAILS.

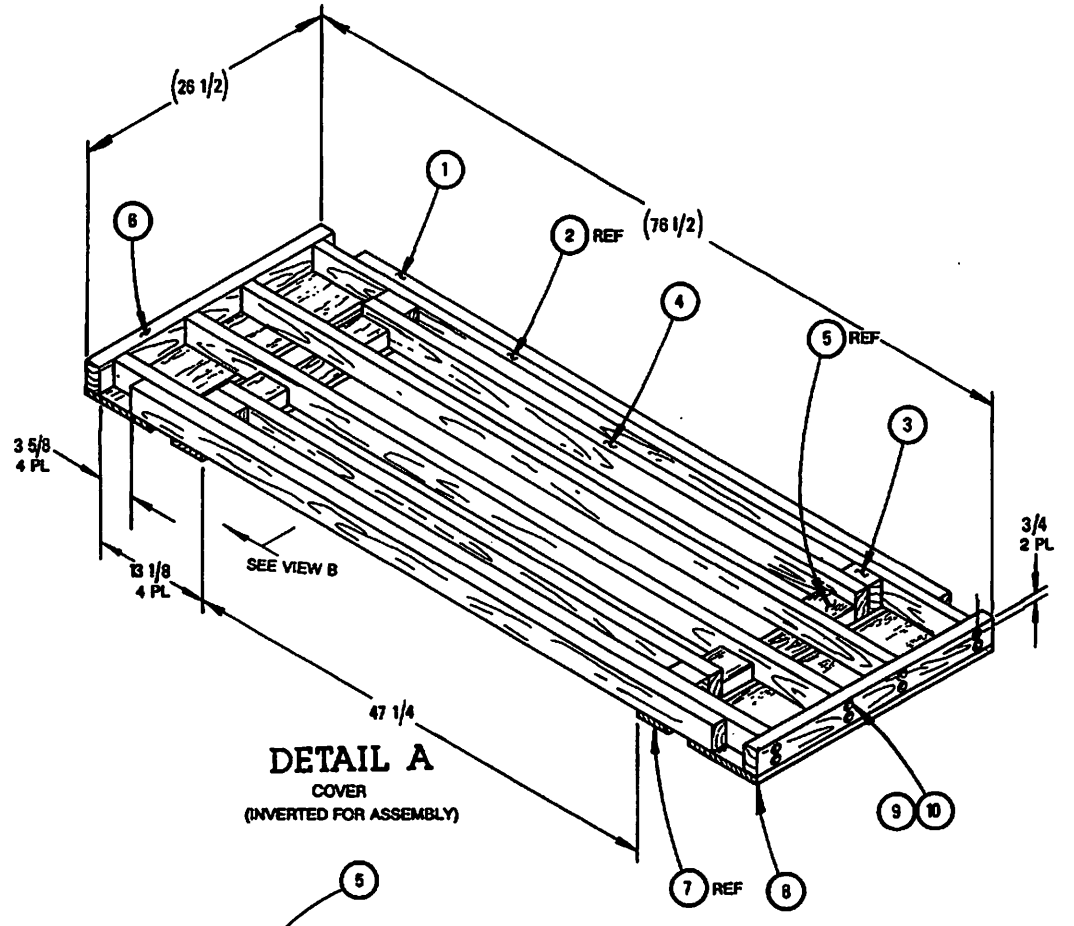

DETAIL A
COVER
(INVERTED FOR ASSEMBLY)

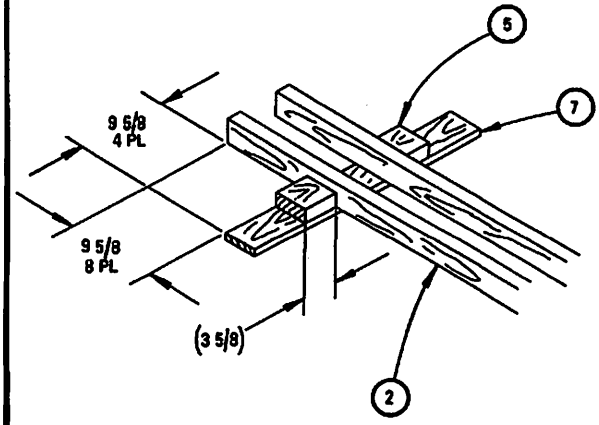

VIEW B 2 PL
OUTER DECKING REMOVED FOR CLARITY

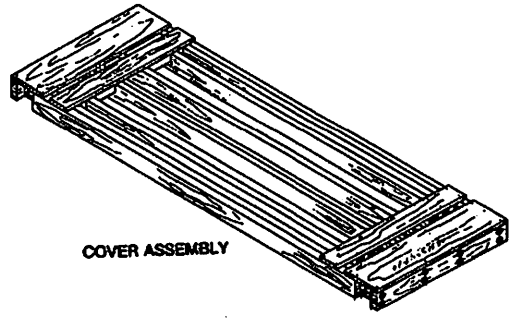



COVER ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 202640-23T23:54Z
Check the source to verify that this is the current version before use.


SUGGESTED NAILING PROCEDURE (BASE):

1. NAIL BOTTOM SPACERS, ITEM 15, TO BASE SKID, ITEM 17, AS SHOWN IN VIEW D W/4-10d NAILS PER SPACER. NAIL TOP SPACERS, ITEM 15, TO BOTTOM SPACERS IN LIKE MANNER.
2. PLACE TWO DECK BOARDS, ITEM 14, ON TOP OF BASE SKID, ITEM 17, AND SNUG AGAINST SPACERS, ITEM 15, AS SHOWN IN VIEW D. BE SURE TO MAINTAIN THE13 1/4"OVERHANG INDICATED IN VIEW D. NAIL DECK BOARDS TO SPACERS W/2-10d NAILS PER JOINT.
3. PLACE DECK BOARDS, ITEM 13, ON TOP OF ITEM 17 AND SNUG AGAINST SPACERS, ITEM 15, AS SHOWN. NAIL DECK BOARDS TO SPACERS W/2-10d NAILS PER JOINT.
4. PLACE SPACER BOARDS, ITEM 12, ON TOP OF ITEM 17 AND NAIL TO DECK BOARD, ITEM 13, W/3-10d NAILS EACH.
5. NAIL DECK BOARDS, ITEM 14, TO SPACERS, ITEM 12, W/2-10d NAILS PER JOINT. BE SURE TO MAINTAIN THE 13 1/4 OVERHANG AS REQUIRED IN STEP 2.
6. NAIL DECK BOARDS, ITEM 11, TO ITEM 14 W/1-10d NAIL EVERY 8 INCHES.
7. SECURE END BOARDS, ITEM 16, TO ENDS OF DECK BOARDS, ITEM 14, WITH TWO LAG BOLTS, ITEM 9, PER JOINT. USE ONE WASHER, ITEM 10, PER BOLT. CENTRALLY LOCATE BOLTS INTO DECK BOARDS.
8. TURN BASE ASSEMBLY OVER AND NAIL DECK PLATE, ITEM 18, TO ITEMS 11, 14, AND 16. USE 10d NAILS.

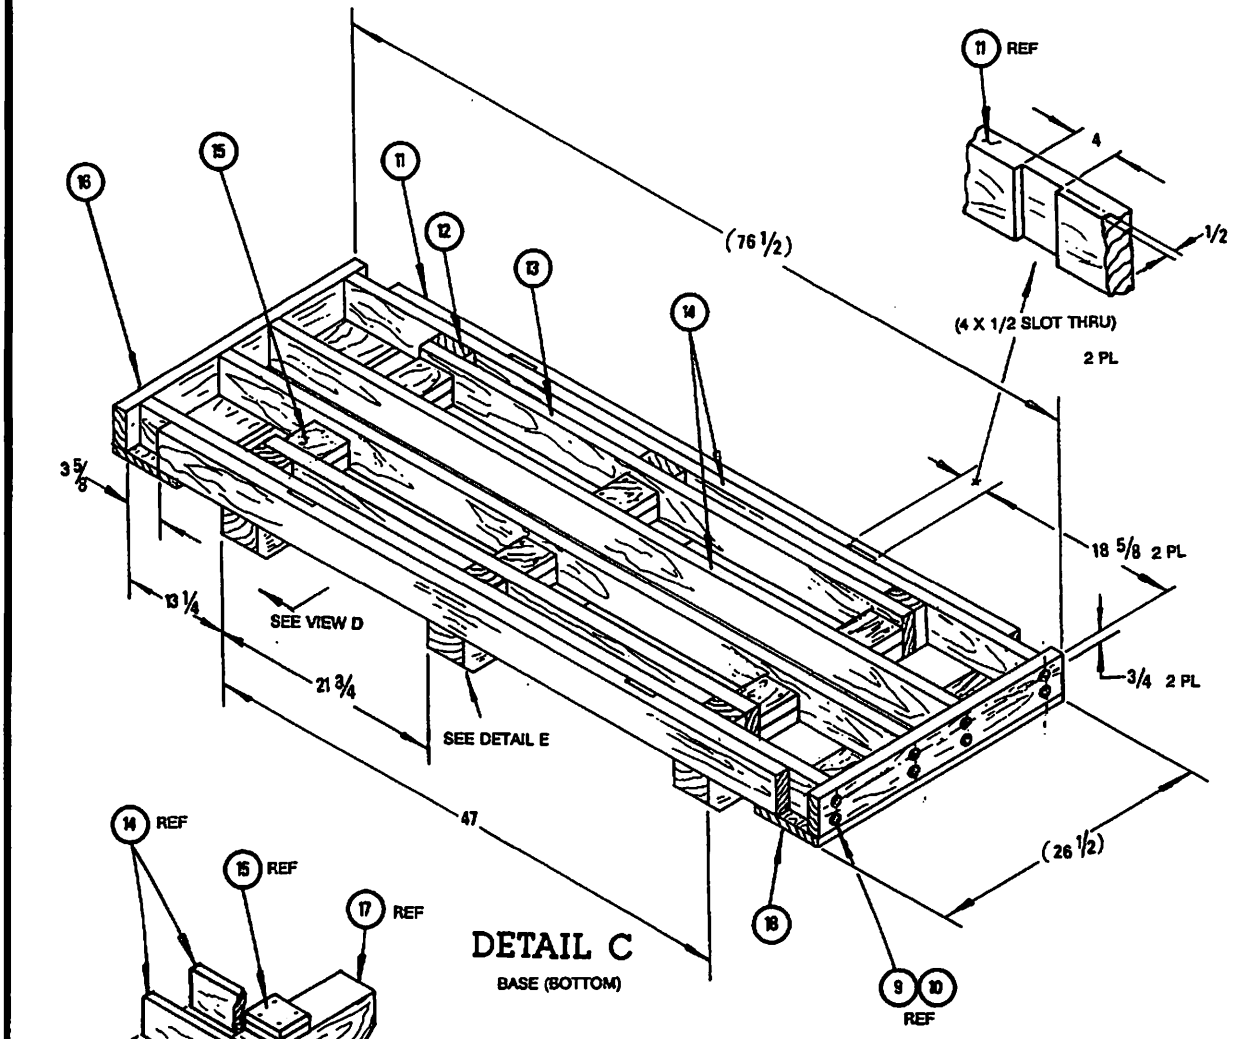

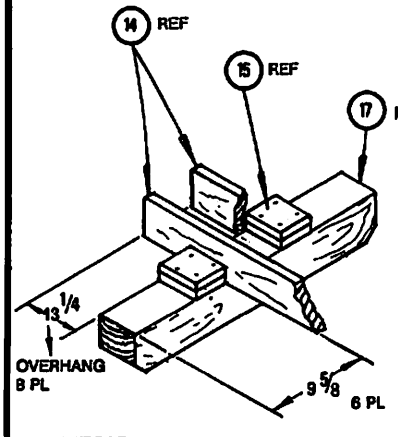

VIEW D 6 PL (OUTER DECKING REMOVED FOR CLARITY)




DETAIL E 6 PL

Source: https://assist.dla.mil -- Downloaded: 202640-23T23:54Z
Check the source to verify that this is the current version before use.

NAILING & ASSY PROCEDURES

1. NAIL SIDE BRACE, ITEM 19, TO END CLEAT, ITEM 20 , W/4-6d NAILS AS SHOWN IN DETAIL F. 2 PL.
2. NAIL (1) PLYWOOD CUSHION BASE, ITEM 21, TO SIDE BRACES, ITEM 19, W/4-8d NAILS/SIDE.
3. ADHERE CUSHION, ITEM 22, TO PLYWOOD BASE, ITEM 21, WITH ADHESIVE, ITEM 23.

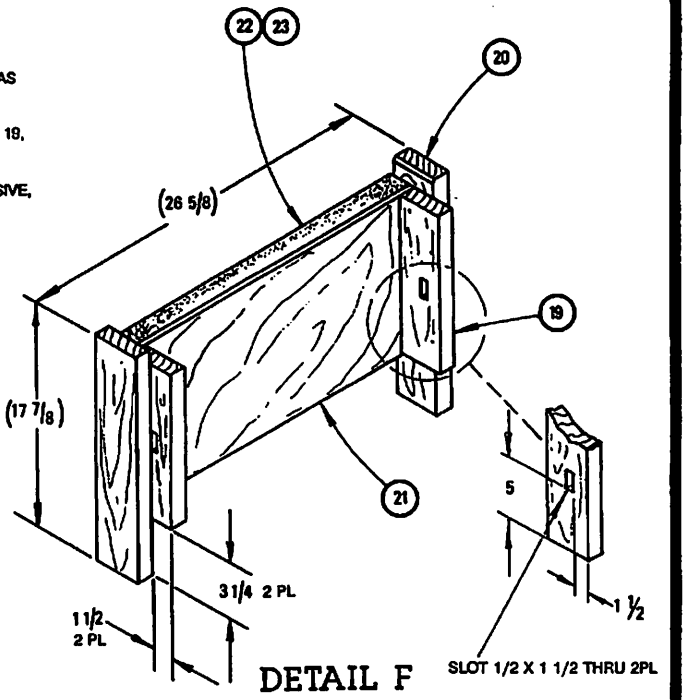


DETAIL F

END FRAME ASSY (2) REQ'D

NAILING & ASSY PROCEDURES

1. NAIL SIDE BRACE, ITEM 25, TO END CLEAT, ITEM 24, W/5-6d NAILS AS SHOWN IN DETAIL G. 2 PL.
2. NAIL (1) PLYWOOD CUSHION BASE, ITEM 26, TO SIDE BRACES, ITEM 25, W/4-6d NAILS/SIDE.
3. ADHERE CUSHION, ITEM 27, TO PLYWOOD BASE, ITEM 26, WITH ADHESIVE, ITEM 23.

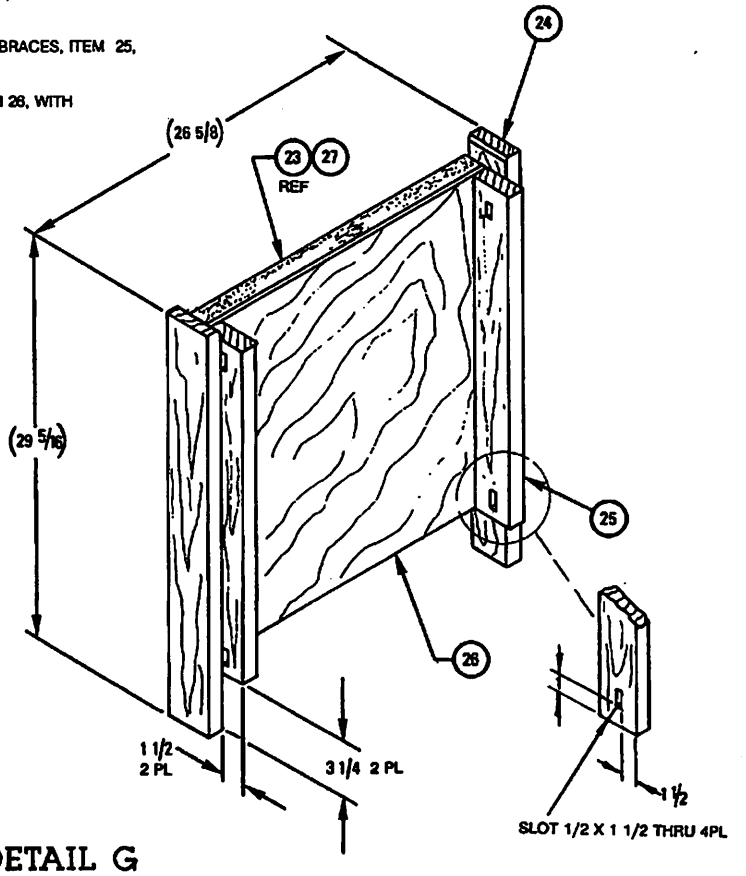

DETAIL G

END FRAME ASSY (2) REQ'D


Source: https://assist.dla.mil -- Downloaded: 202640-23T23:54Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 20260-23T23:54Z
Check the source to verify that this is the currentversion before use.

MIL-STD-1322-108 (NAVY)


NOTES:

1. ALL MATERIALS TO BE IN ACCORDANCE WITH MIL-STD-1322 (NAVY).
2. DO NOT USE TYPE I STRAPPING WITH POWER MACHINES.

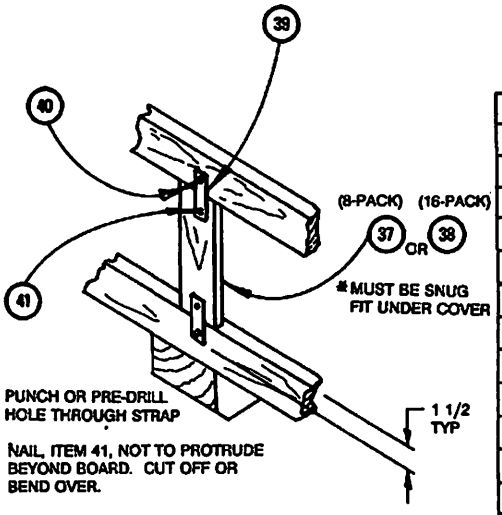

DETAIL H VERTICAL SUPPORT

(FOR BOTH 8 & 16-PACK UNIT LOADS) 4 PL



DETAIL J

STORAGE POSITION OF VERTICAL SUPPORT

DE-UNITIZING PROCEDURE

a. CUT AND REMOVE LATERAL AND LONGITUDINAL STRAPPING.

b. REMOVE VERTICAL SUPPORT BOARDS BY UNSCREWING AND RE-ATTACHING TO OUTER BASE OR COVER AS SHOWN IN DETAIL J.

c. REMOVE COVER.

d. REMOVE END FRAMES ON EACH END.

e. REMOVE TEST CHARGE CANISTERS.

THIS DE UNITIZING PROCEDURE IS FOR BOTH 8 & 16-PACK UNIT LOADS.

REQ.	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
4	41	NAIL, DRYWALL	STEEL	1" LG.*
4	40	SCREW, DRYWALL	"	1"- 1 1/4" LG.
4	39	STRAP, JOINER	"	.035 X 3/4 X 3"
4	38	SUPPORT, VERTICAL (16-PACK)	WOOD	1 X 4 X (23)*
4	37	SUPPORT, VERTICAL (8-PACK)	"	1 X 4 X (11 1/2)*
AR	36	INK, STENCIL	A-A-208	
4	35	STAPLES	STEEL	3/4" SIZE
AR	34	STRAP SEAL	STEEL	3/4" SIZE
1	33	LONGITUDINAL STRAP, 8-PACK	STEEL	3/4 X .035 X 18 1/2 FT
2	32	COVER STRAP, 8-PACK	STEEL	3/4 X .035 X 9 FT
2	31	CANISTER STRAP, 8-PACK	STEEL	3/4 X .035 X 6 FT
2	30	LONGITUDINAL STRAP, 16-PACK	STEEL	3/4 X .035 X 18 1/2 FT
2	29	COVER STRAP, 16-PACK	STEEL	3/4 X .035 X 11 FT
2	28	CANISTER STRAP, 16-PACK	STEEL	3/4 X .035 X 9 1/2 FT
1	27	CUSHION (DETAIL G)	PPP-C-1752 2lb	22 13/16 X 23 5/8 X 2
1	26	CUSHION BASE	PLYWOOD	1/2 X 22 13/16 X 23 5/8
2	25	SIDE BRACE (DETAIL G)	WOOD	2 X 4 X 22 13/16
2	24	END CLEAT (DETAIL G)	WOOD	2 X 4 X 29 5/16
AR	23	ADHESIVE (DETAIL F & G)	MMM-A-121	
1	22	CUSHION (DETAIL F)	PPP-C-1752 2lb	11 3/8 X 23 5/8 X 2
1	21	BASE, CUSHION (DETAIL F)	PLYWOOD	1/2 X 11 3/8 X 23 5/8
2	20	END CLEAT (DETAIL F)	WOOD	2 X 4 X 17 7/8
2	19	SIDE BRACE (DETAIL F)	WOOD	2 X 4 X 11 3/8
2	18	DECK PLATE (DETAIL C)	WOOD	1 X 8 X 26 1/2
3	17	BASE SKID (DETAIL C)	WOOD	4 X 4 X 26 1/2
2	16	END CLEAT (DETAIL C)	WOOD	2 X 4 X 26 1/2
12	15	INNER SPACER (DETAIL C)	WOOD	2 X 4 X 3 5/8
4	14	DECKING, INNER (DETAIL C)	WOOD	2 X 4 X 73 1/2
2	13	DECKING, INNER (DETAIL C)	WOOD	2 X 4 X 47
6	12	OUTER SPACER (DETAIL C)	WOOD	2 X 4 X 3 1/2
2	11	DECKING, OUTER (DETAIL C)	WOOD	2 X 4 X 68 1/4
18	10	FLAT WASHER (DETAIL A & C)	MS9320-12	3/4" O.D. X .401" I.D.
18	9	LAG BOLT (DETAIL A & C)	MS16922-545G	3/8" DIA x 3" LONG
2	8	DECK PLATE (DETAIL A)	WOOD	1 X 8 X 26 1/2
2	7	STACKING FEATURE (DETAIL A)	WOOD	1 X 4 X 26 1/2
2	6	END CLEAT (DETAIL A)	WOOD	2 X 4 X 26 1/2
4	5	INNER SPACER (DETAIL A)	WOOD	2 X 4 X 3 5/8
2	4	DECKING, INNER (DETAIL A)	WOOD	2 X 4 X 54 1/4
4	3	OUTER SPACER (DETAIL A)	WOOD	2 X 4 X 3 1/2
4	2	DECKING, INNER (DETAIL A)	WOOD	2 X 4 X 73 1/2
2	1	DECKING, OUTER (DETAIL A)	WOOD	2 X 4 X 66 1/4

PARTS LIST

PREPARING ACTIVITY:
NAVY-OS
(PROJECT NO. 8140-N1019)