MIL-T-85413A(AS)
23 January 1986
SUPERSEDING
MIL-T-85413(AS)
27 August 1982

MILITARY SPECIFICATION

TEST SET, COMPUTER

MEMORY LOADER-VERIFIER

AN/ASM-607(V)

GENERAL SPECIFICATION FOR

This specification is approved for use within Naval Air Systems Command, Department of the Navy, and is available for use by all departments and agencies of the Department of Defense.

1. SCOPE.

1.1 Scope. This specification covers the general requirements for the manufacture and acceptance of the Computer Memory Loader-Verifier Test Set, AN/ASM-607(V), referred to herein as the MLV. This specification is to be used in conjunction with the applicable specification sheets and drawings listed in Supplement 1.

2. APPLICABLE DOCUMENTS.

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer, Naval Air Engineering Center, Systems Engineering and Standardization Department (SESD) Code 93, Lakehurst,NJ 08733, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 4920

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:47Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

MILITARY

MIL-T-18303	Format for Test Procedures, Preproduction Acceptance and Life for Aircraft Electronic Equipment.
MIL-T-21200	Test Equipment for Use With Electrical and Electronic Equipment, General Specification for.
MIL-T-85284	Test Set, Adapter Group, OF-65/ASM.

(See Supplement 1 for applicable specification sheets.)

STANDARDS

FEDERAL

FED-STD-102	Preservation, Packaging, and Packing Levels.

MILITARY

MIL-STD-454	Standard General Requirements for Electronic Equipment.
MIL-STD-461	Electromagnetic Interference Characteristics Requirements for Equipment.
MIL-STD-704	Electric Power, Aircraft, Characteristics and Utilization of.
MIL-STD-781	Reliability Design Qualification Production and Acceptance Tests: Exponential Distribution.
MIL-STD-785	Reliability Program for Systems and Equipment Development and Production.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:47Z
Check the source to verify that this is the current version before use.

MIL-STD-810	Environmental Test Methods.
MIL-STD-1695	Minimum Standards for Working Environments.
MIL-STD-45662	Calibration Systems Requirements.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS

Naval Air Systems Command
(Code Ident 30003)

1164AS222	Test Set Adapter Group, OF-65/ASM.
1164AS230	Test Set, Loader Verifier Computer Memory AN/ASM-607(V).

PUBLICATIONS

Naval Air Sytems Command
(Code Ident 30003)

WS-6536	Procedures and Requirements for Preparation and Soldering of Electrical Connections.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS.

3.1 Specification sheets. The MLV requirements shall be as specified herein and in accordance with the applicable detail specification sheets. In the event of any conflict between requirements of this specification and the detail specification sheet, the latter shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:47Z
Check the source to verify that this is the current version before use.

3.1.1 Government-furnished equipment (GFE). The MLV shall operate in conjunction with the applicable Government-furnished software system installed on the MLV Magnetic Tape Memory (MTM) (see Drawing 1164AS320). Additional required GFE shall be further defined in all contracts and procuring documents (see 6.2.1).

3.2 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.2 and 6.3).

3.3 Characteristics.

3.3.1 Performance. The performance requirements for each MLV shall be as specified in the individual detail specification sheet.

3.3.1.1 Input voltages. The MLV shall operate from available aircraft power of 115 volts (V), 400 hertz (Hz), 3-phase, under the steady state conditions specified in MIL-STD-704, for Category B equipment.

3.3.1.1.1 Current consumption. Current consumption shall be not greater than 1.0 ampere (A) through any input power connector pin during any mode of operation.

3.3.1.2 Electrical power. The MLV shall operate from a power source as specified in MIL-T-21200 for Class 2 equipment.

3.3.1.2.1 Protection. The MLV shall withstand input power variations imposed by abnormal electric system operations as defined in MIL-STD-704, and shall meet the applicable sections of MIL-STD-704, Category B equipment, with the following exceptions:

a. Normal system operation shall be defined for input power within the normal steady-state limits.

b. Abnormal system operation shall be defined for variations of input power outside the normal steady-state limits. For short term power irregularities (typically low voltages), the MLV shall display a power failure message to indicate abnormal power system conditions have been experienced and the operator shall be required to cycle the on/off switch.

The MLV shall be capable of withstanding the transients of MIL-STD-704 power sources. The MLV shall be fail safe (any failure shall not cause or be a source of personnel injury) and not be required to function during abnormal power system conditions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:47Z
Check the source to verify that this is the current version before use.

3.3.2 Environmental conditions. The MLV shall meet the requirements of 3.3.1 and the applicable specification sheet during and after exposure to the environmental conditions of MIL-T-21200 for Class 2 equipment or the following or any natural combination thereof:

a. High and low temperature extremes

b. Altitude

c. Shock

d. Vibration

e. Humidity

f. Salt fog

g. Dust

h. Explosive atmosphere

i. 30-inch drop test

j. Electromagnetic compatibility

3.3.3 Reliability. The contractor shall prepare a production reliability program plan, when specified in the contract, using MIL-STD-785 as a guide (see 6.2.2). This program plan shall be approved by the procuring activity prior to implementation.

3.3.3.1 Mean-time-between-failures (MTBF). The MLV, in conjunction with the MTM (see 3.1.1) shall demonstrate a minimum acceptable MTBF of 500 hours when tested as specified in 4.6.

3.4 Design and construction.

3.4.1 Production drawings. The applicable MLV shall be fabricated and assembled in accordance with the documents referenced on Drawing 1164AS230 and as specified herein.

3.4.2 Standards of manufacture. As a minimum, the MLV shall be manufactured, inspected, and tested under conditions and procedures meeting the requirements specified herein, and as specified on the applicable detail specification sheet.

3.4.2.1 Soldering. Procedures and requirements for preparation and soldering of electrical connections shall be in accordance with WS-6536.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:47Z
Check the source to verify that this is the current version before use.

3.4.2.2 Special working environment. The facilities used in the manufacture, testing, and inspection of the MLVs shall meet the requirements of MIL-STD-1695 (electric assembly) Work Area 5.

3.4.3 Identification and marking. MLVs shall be identified and marked as specified on the respective drawings.

3.4.4 Workmanship. The MLVs shall be fabricated in a manner that will ensure compliance with all requirements specified herein and on the respective specification sheets. Fabrication and assembly practices shall be in accordance with MIL-STD-454, Requirement 9.

4. QUALITY ASSURANCE PROVISIONS.

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order (see 6.2.1), the contractor is responsible for the performance of all inspections specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies sumbitted to the Government for acceptance comply will all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Classification of inspections or tests. The inspections or tests specified herein are classified as follows:

a. First article inspection (see 4.2).

b. Quality conformance inspections (see 4.3).

c. Acceptance tests (see 4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:47Z
Check the source to verify that this is the current version before use.

4.2 First article inspection. First article inspection shall be made on equipments representative of the production equipments to be supplied under the contract. The sample size and testing sequence shall be as specified in the contract or purchase order (see 6.2.1). The tests shall be accomplished under the responsibility of the contractor and shall be conducted in accordance with the approved test procedure (see 4.2.2.4) in accordance with the tests specified in Table I. Contractors not having adequate facilities to conduct all required tests shall obtain the services of a commercial testing laboratory acceptable to the Government.

4.2.1 Scope of tests. The tests shall include all tests deemed necessary, by the procuring activity, to determine that the equipment meets all the requirements of this specification, the detail specification sheets, other applicable specifications and the contract. Within the limits specified in MIL-T-21200, first article tests shall include the following:

a. Acceptance test (see 4.4)

b. Reliability assurance test (see 4.6)

c. Environmental tests (see 4.5)

4.2.2 Test procedures, provisions and equipment.

4.2.2.1 Maintenance and calibration. All test equipment shall be calibrated and maintained in accordance with a plan in accordance with MIL-STD-45662 (see 6.2.2).

4.2.2.2 Instruments and test equipment. All instruments and test equipment used for inspection and testing shall conform to the requirements of MIL-STD-45662.

4.2.2.3 Test facility environment. Unless otherwise specified herein, or on the applicable detail specification sheet, tests shall be performed under the following conditions of environment:

a.	Temperature:	25 ±5 degrees Celsius (°C)
b.	Altitude:	Elevation of test facility
c.	Relative humidity:	50 ±30 percent

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:47Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspections.

Examinations or tests	Requirement paragraph	Methods paragraph
Group A		
Visual and mechanical inspection	3.4	4.7
Group B		
Temperature shock	3.3.2	4.5.1
Performance	3.3.1	4.4.1.3
High temperature	3.3.2	4.5.2
Performance	3.3.1	4.4.1.3
Low temperature	3.3.2	4.5.3
Performance	3.3.1	4.4.1.3
Altitude	3.3.2	4.5.4
Performance	3.3.1	4.4.1.3
Shock	3.3.2	4.5.5
Performance	3.3.1	4.4.1.3
Vibration	3.3.2	4.5.6
Performance	3.3.1	4.4.1.3
Humidity	3.3.2	4.5.7
Performance	3.3.1	4.4.1.3
Salt fog	3.3.2	4.5.8
Performance	3.3.1	4.4.1.3
Dust	3.3.2	4.5.9
Performance	3.3.1	4.4.1.3
Explosive atmosphere	3.3.2	4.5.10
Performance	3.3.1	4.4.1.3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:47Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspections. (Continued)

Examinations or tests	Requirement paragraph	Methods paragraph
30-inch drop test	3.3.2	4.5.11
Performance	3.3.1	4.4.1.3
Electromagnetic compatibility	3.3.2	4.5.12
Performance	3.3.1	4.4.1.3
Group C		
Reliability	3.3.3	4.6

4.2.2.4 Test procedures. When specified in the contract or purchase order (see 6.2.2), the procedures used for conducting all tests shall be prepared by the contractor for procuring activity review and approval. The right is reserved by the procuring activity or the Government inspector to modify the tests or require any additional tests deemed necessary to determine compliance with the requirements of this specification and the contract. MIL-T-18303 shall be used as a guide for preparation of test procedures. When approved test procedures are available from previous contracts such procedures may be used if approved by the procuring activity. However, the right is reserved by the procuring activity to require modification of such procedures, including additional tests, when deemed necessary (see 6.2.1).

4.3 Quality conformance inspections. Unless otherwise specified in the contract or purchase order (see 6.2.1), the examinations and tests comprising quality conformance inspections shall be performed in accordance with 4.4.

4.4 Acceptance tests. The contractor shall be responsible for accomplishing the acceptance tests. The contractor shall make available the test procedure for procuring activity approval prior to testing. All inspection and testing shall be under the supervision of the Government inspector. Contractors not having testing facilities satisfactory to the cognizant technical activity shall engage the service of a commercial testing laboratory acceptable to the procuring activity. When specified in the contract or purchase order (see 6.2.2), the contractor shall prepare test reports showing qualitative results for all acceptance tests. Such reports shall be signed by an authorized representative of the contractor or laboratory, as applicable. Acceptance or approval of material during the course of manufacture shall not be construed as a guarantee of the acceptance of the finished product. Acceptance tests shall consist of the following:

a. Individual tests (see 4.4.1)

b. Special tests (see 4.4.2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:47Z
Check the source to verify that this is the current version before use.

4.4.1 Individual tests. Each MLV submitted for acceptance shall be subjected to the individual tests. These tests shall be adequate to determine compliance with the requirements of material, workmanship, operational adequacy and reliability. As a minimum, each equipment accepted shall have passed the following tests:

a.	Examination of product	(see 4.4.1.1).
b.	Burn-in test	(see 4.4.1.2).
c.	Operational test	(see 4.4.1.3).

4.4.1.1 Examination of product. Each MLV shall be examined carefully to determine that the material and workmanship requirements have been met prior to submittal for testing (Group A tests of Table I).

4.4.1.2 Burn-in-test. Each MLV, with the GFE MTM (containing the applicable burn-in test program) installed, shall be operated under the conditions specified herein for a period of 50 consecutive operating hours without a failure. The test shall be conducted in accordance with Figure 1 and the following:

a.	Temperature cycle:	-20 to 55°C ±2°C
b.	Vibration:	Peak acceleration of 2.2 gravity units (g) ±10 percent for 30 minutes during each hour of operating time at a nonresonant frequency between 20 and 60 Hz. The vibration shall be normal to the plane of the Loader/Verifier front panel.

4.4.1.3 Operational test. Operational tests shall be performed utilizing GFE MLV software installed on the tape transport unit (TTU). These tests shall include MLV wrap-around self-test, functional interface tests with the appropriate avionics systems and MLV-to-MLV diagnostic testing utilizing the OF-65/ASM Test Set Adapter Group (TSAG) (MIL-T-85284 and Drawing 1164AS222). Specific details are addressed in the individual specification sheets.

4.4.2 Special tests. Special tests shall be conducted on a quantity of MLVs as prescribed by the procuring activity for the purpose of checking the effect of any design or material change on the performance of the equipment and to assure adequate quality control. The equipment selected for special tests may be selected from MLVs previously subjected to the sampling or reliability assurance tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:47Z
Check the source to verify that this is the current version before use.

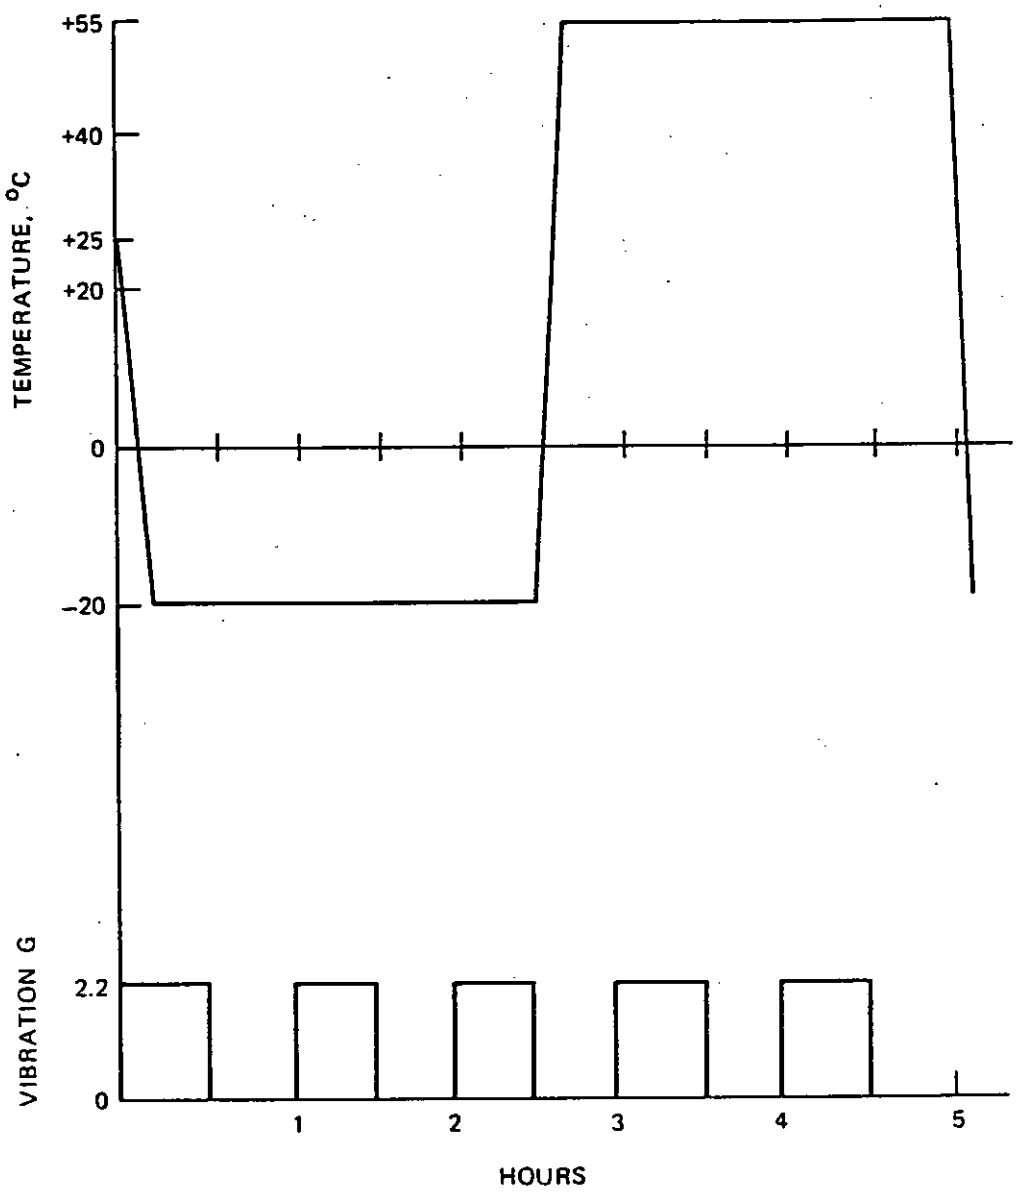


FIGURE 1. Burn-in test chamber cycle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:47Z
Check the source to verify that this is the current version before use.

4.5 Environmental tests. Environmental tests shall be performed to verify conformance to the requirements of 3.3.2. Individual test item performance shall be tested as specified in the appropriate detail specification sheets.

4.5.1 Temperature shock. The MLV shall be tested in accordance with MIL-STD-810, Method 503.1, Procedure I, except the low temperature extreme shall be -40°C and the high temperature extreme shall be +55°C. The MLV shall meet the operational performance tests of 4.4.1.3 after the temperature shock test.

4.5.2 High temperature. The MLV shall be tested in accordance with MIL-STD-810, Method 501.1, Procedure I; the temperature during Steps 1 and 4 shall be +55°C. The MLV shall meet the operational performance tests of 4.4.1.3 after the high temperature test. Operation during the test shall consist of execution of the burn-in test program.

4.5.3 Low temperature. The MLV shall be tested in accordance with MIL-STD-810, Method 502.1, Procedure I; the temperature in Steps 2 and 4 shall be -40°C. The time for Step 2 shall be 24 hours minimum. The MLV shall meet the operational performance tests of 4.4.1.3 after the low temperature test. Operation during the test shall consist of execution of the burn-in test program.

4.5.4 Altitude. The MLV shall be tested in accordance with MIL-STD-810, Method 500.1, Procedure I. Operating time shall be 1 hour minimum. The MLV shall meet the operational performance tests of 4.4.1.3 after the altitude test. Operation during the test shall consist of execution of the burn-in program.

4.5.5 Shock. The MLV shall be tested in accordance with MIL-STD-810, Method 516.2, Procedure I, Figure 516.2-2, Amplitude (a), Time Duration (c). The MLV shall meet the operational performance tests of 4.4.1.3 after the shock test.

4.5.6 Vibration. The MLV shall be tested in accordance with MIL-STD-810, Method 514.2, Procedure X, Section 4.4.1.3 (cycling only) except the frequency range shall be 5 to 55 Hz. The cycle time shall be 15 minutes minimum. The total test time shall be 1 hour minimum per axis and the inputs shall be as follows (see Figure 1 for definition of axes):

Frequency range, Hz	Double amplitude, inch
5 to 15	0.06
15 to 25	0.04
25 to 55	0.02

The MLV shall meet the operational performance tests of 4.4.1.3 after the vibration test. Operation during the test shall consist of execution of the burn-in test program.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:47Z
Check the source to verify that this is the current version before use.

4.5.7 Humidity. The MLV shall be tested in accordance with MIL-STD-810, Method 507.1, Procedure I, except the high temperature limit shall be +55°C. The MLV shall meet the operational performance tests of 4.4.1.3 after the humidity test.

4.5.8 Salt fog. The MLV shall be tested in accordance with MIL-STD-810, Method 509.1, Procedure I. The MLV shall meet the operational performance tests of 4.4.1.3 after the salt fog test.

4.5.9 Dust. The MLV shall be tested in accordance with MIL-STD-810, Method 510.1, Procedure I, except the second 6-hour test shall be conducted at +55°C, and shall be performed immediately after reaching stabilization in Step 2. The MLV shall meet the operational performance tests of 4.4.1.3 after the test.

4.5.10 Explosive atmosphere. The MLV shall be tested in accordance with MIL-STD-810, Method 511.1, Procedure I, except the applicable high temperature shall be +55°C. The MLV shall meet the operational performance tests of 4.4.1.3 after the explosive atmosphere test. Operation during the test shall consist of execution of the burn-in test program.

4.5.11 30-inch drop test. The MLV shall be tested in accordance with MIL-STD-810, Method 516, Procedure II, except the MLV shall be dropped 30 inches once in the Z-axis and Y-axis as defined on Figure 2. The MLV shall meet the operational performance tests of 4.4.1.3 after the 30-inch drop test.

4.5.12 Electromagnetic compatibility. The MLV shall be tested in accordance with MIL-STD-461, Methods CE03, CS02, CS06, RE02, and RS03. The MLV shall meet the operational performance tests of 4.4.1.3 after the electromagnetic compatibility test. Operation during the test shall consist of execution of the burn-in test program.

4.6 Reliablity assurance tests. When specified in the contract or purchase order (see 6.2.1), reliability assurance tests shall be conducted in accordance with MIL-STD-781, Test Plan VIIIC, to demonstrate the requirements of 3.3.3, except lower temperature extreme shall be -40°C (Group C tests of Table I). Operation during the test shall consist of execution of the burn-in test program.

4.7 Visual and mechanical inspection. The MLV shall be visually inspected for conformance of the requirements of 3.3.

5. PACKAGING.

5.1 Preservation-packaging. Preservation and packaging shall be in accordance with FED-STD-102, Level C, or as specified in the contract or purchase order (see 6.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:47Z
Check the source to verify that this is the current version before use.

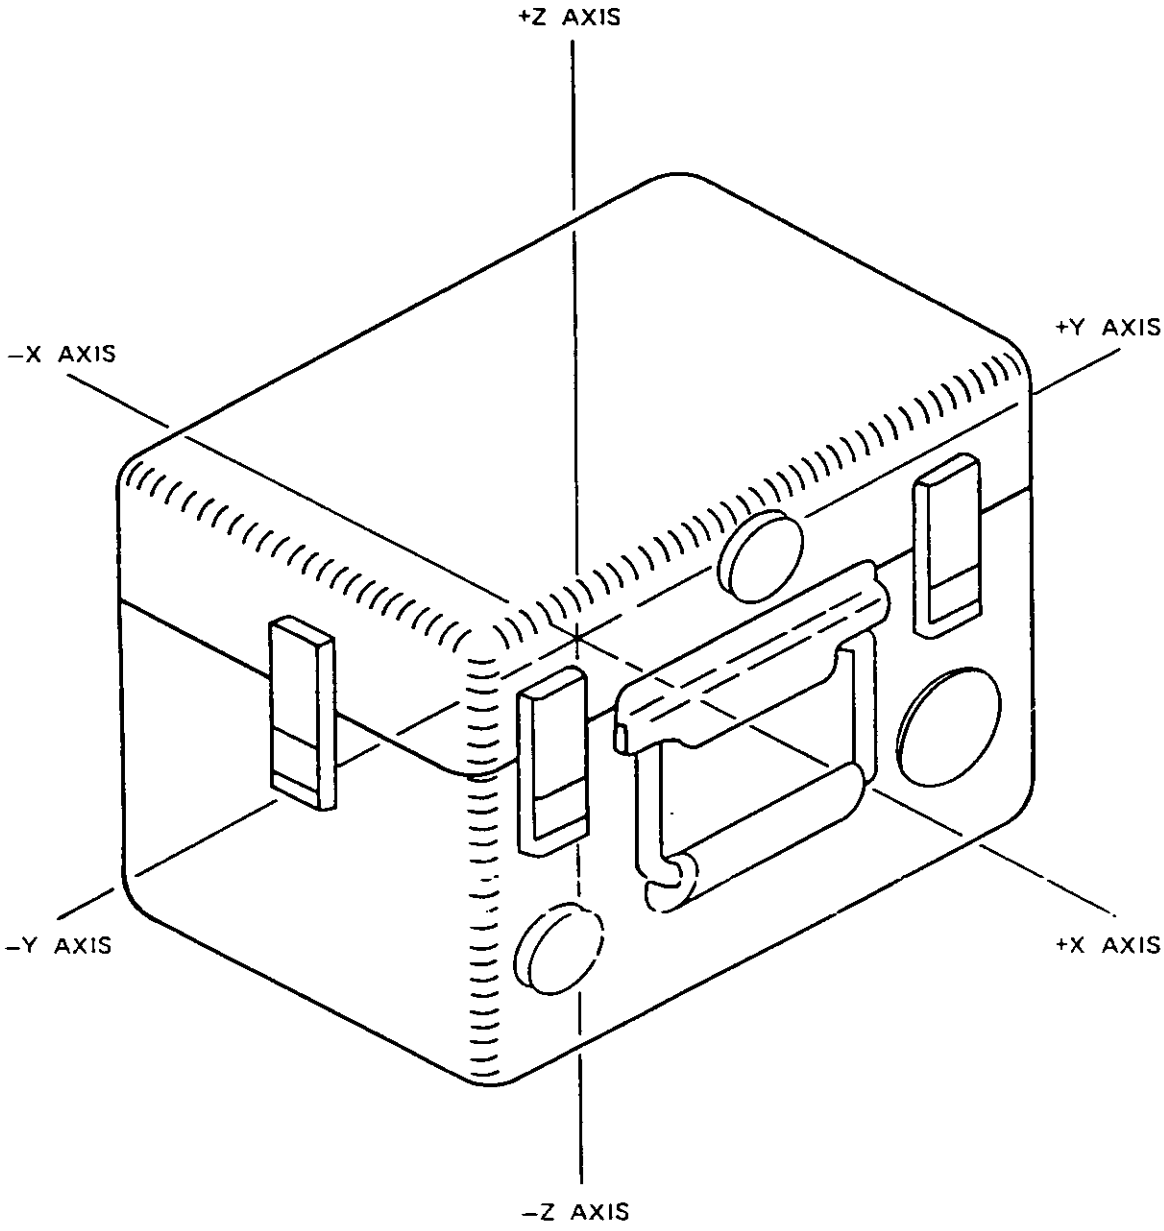


FIGURE 2. MLV axis orientation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:47Z
Check the source to verify that this is the current version before use.

5.1.1 Level C packaging. Each MLV shall be packaged to afford protection against damage during shipment from the supply source to the first receiving activity for immediate use.

5.2 Packing. Packing shall be in accordance with FED-STD-102, Level C, or as specified in the contract or purchase order (see 6.2.1).

5.2.1 Level C packing. MLVs packaged as specified in 5.1.1 shall be packed to afford protection against damage during direct shipment from the supply source to the first receiving activity for immediate use. Shipping containers shall be in accordance with the Uniform Freight Classification Rules and Regulations of other carriers as applicable to the mode of transportation.

5.3 Marking. Marking shall be as specified in the contract or purchase order (see 6.2.1).

6. NOTES.

6.1 Intended use. The equipment covered by this specification is a lightweight portable unit capable of interfacing to and performing as ground support equipment for aircraft avionics systems.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

a. Number, title, and date of this specification.

b. GFE (see 3.1.1).

c. Facility designated to perform testing and test facilities (see 4.1).

d. Test conditions and provisions, if different from 4.2.2.

e. Reliability assurance plan (see 4.6).

f. Preservation-packaging, and packing levels if different from 5.1 and 5.2.

g. Special markings on shipping container (see 5.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:47Z
Check the source to verify that this is the current version before use.

6.2.2 Data requirements. When this specification is used in an acquisition and data are required to be delivered, the data requirements identified below shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved Contract Data Requirements List (CDRL) incorporated into the contract. When the provisions of DOD FAR Supplement, Part 27 Sub-Part 27.410-6 (DD Form 1423) are invoked and the DD Form 1423 is not used, the data specified below shall be delivered by the contractor in accordance with the contract or purchase order requirements. Deliverable data required by this specification are cited in the following paragraphs.

Paragraph no.	Data requirement title	Applicable DID no.	Option
4.2.2.1	Calibration	DI-R-7064	----
4.2.2.4	Test procedures and test details	DI-T-5204	----
4.4	Test reports	DI-T-3718	----

(Data item descriptions related to this specification, and identified in section 6 will be approved and listed as such in DoD 5000.19L., Vol. II, AMSDL. Copies of data item descriptions required by the contractors in connection with specific acquisition functions should be obtained from the Naval Publications and Forms Center or as directed by the contracting officer.)

6.3 First article. When a first article inspection is required, the items should be a sample selected from the first MLV production items. The first article should consist of the sample size specified in the contract or purchase order. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.4 Definitions. The following definitions apply to both the general specification and the specification sheets:

a. Magnetic Tape Memory (MTM) — MTM is the combination of equipment from Raymond Engineering which includes a Tape Transport Unit (TTU) (a militarized tape cassette), Electronics Unit (EU) which contains control circuitry for the TTU, a cradle assembly which holds the TTU in the MLV and a cable which connects the TTU to the EU.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:47Z
Check the source to verify that this is the current version before use.

b. MLV Software System — This software involves the following subsystems.

i. Self-Test. The AN/ASM-607(V) self-test software is designed to measure MLV system readiness and consists of a power-up built-in-test (BIT), interface test, display test, and magnetic tape memory (MTM) test. The power-up BIT resides in the MLV ROM and is automatically performed with each power-up. The integrity of the ROM, the RAM, and the tape memory are checked. During the interface test, a tape memory read/write test is performed; the interface logic is checked, and the continuity of the MLV-to-user system interface cables are verified. The display test lights all of the MLV display segments and panel lights and a limited keyboard test is performed. The magnetic tape memory test exercises the tape control circuitry and performs a read/write test on the tape itself.

ii. Diagnostic tests. An MLV can perform as automatic test equipment for a faulty MLV. By using the fault isolation diagnostic software in conjunction with the OF-65/ASM TSAG hardware, faults can be detected to the MLV shop-replaceable assembly (SRA) level. This diagnostic software is a series of tests designed to exercise the logic of an individual hardware module in a MLV. TSAG is intended for use in the intermediate (I-Level) environment and is a "stand-alone" program (i.e., no other programs are present in the MLV when the diagnostics are in use). The diagnostics report the inability of an MLV to complete its test sequence successfully. These tests include a memory test, interface circuitry test, central processing unit (CPU) test, magnetic tape memory test, and display/keyboard test.

iii. System. This software consists of general purpose routines such as operator input processing and application peculiar software. Dependent upon user performance requirements. This software may consist of functions such as loading/verifying tactical programs from the magnetic tape memory, saving these programs on the tape (for later analysis or reloading), library functions, changing map and target data in aircraft navigational systems, performing as a programmer's console, and interfacing with aircraft diagnostic programs to troubleshoot avionics systems. A complete description of peculiar MLV operational requirements are available in the appropriate MLV software documentation.

c. Avionics Software. — Software designed, developed and controlled by user activities. May consist of both tactical flight programs, threat list parameters or aircraft maintenance and diagnostic programs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:47Z
Check the source to verify that this is the current version before use.

6.5 Changes from previous issue. Asterisks are not used in this revision to identify changes to the previous issue due to the extensiveness of the changes.

Preparing activity:
Navy-AS

(Project No. 4920-N408)

U.S. GOVERNMENT PRINTING OFFICE: 1986 - 605-036/41089

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:47Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY
Commanding Officer
Naval Air Engineering Center
Systems Engineering Standardization Department
(SESD), Code 93
Lakehurst, NJ 08733

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Naval Air Engineering Center
Systems Engineering Standardization Department
(SESD). Code 93
Lakehurst, NJ 08733

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:47Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-T-85413A(AS)	TEST SET, COMPUTER MEMORY LOADER-VERIFIER AN/ASM-607(V)

3a. NAME OF SUBMITTING ORGANIZATION

b. ADDRESS *(Street, City, State, ZIP Code)*

4. TYPE OF ORGANIZATION *(Mark one)*

- ☐ VENDOR
- ☐ USER
- ☐ MANUFACTURER
- ☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:47Z
Check the source to verify that this is the current version before use.