

FED. SUP CLASS
5305

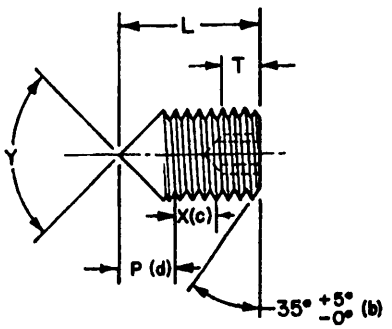



THREAD	D DIA MAX	F		Y		SELF-LOCKING DESIGN DATA P(d) MAX		T HEX DEPTH
		MAX	MIN	118° ± 2° FOR LENGTHS AND UNDER	90° ± 2° FOR LENGTHS AND OVER	116°	88°	MIN
#4-40NC-3A	.112	.0510	.0500	1/8	5/32	.060	.083	.040
#6-32NC-3A	.138	.0635	.0625	1/8	3/16	.075	.104	.050
#8-32NC-3A	.164	.0791	.0781	3/16	1/4	.084	.117	.062
#10-32NF-3A	.190	.0947	.0937	3/16	1/4	.092	.131	.075
1/4-28UNF-3A	.250	.1270	.1250	1/4	5/16	.114	.166	.100
5/16-24UNF-3A	.3125	.1582	.1562	5/16	3/8	.137	.204	.125
3/8-24UNF-3A	.375	.1895	.1875	3/8	7/16	.159	.236	.150
1/2-20UNF-3A	.500	.2520	.2500	1/2	9/16	.206	.309	.200

L LENGTH	TOLERANCE	DASH NUMBERS (a)							
		#4-40	#6-32	#8-32	#10-32	1/4-28	5/16-24	3/8-24	1/2-20
1/8	±.010	1	2	3	4				
3/16		5	6	7	8	9			
1/4		10	11	12	13	14	15		
5/16		16	17	18	19	20	21		
3/8		22	23	24	25	26	27	91	>2
7/16		89	90	30	31	32			
1/2		33	34	35	36	37	38	39	40
9/16		41	42	43	44	45			
5/8		46	47	48	49	50	51	52	53
3/4			54	55	56	57	58	59	60
7/8			61	62		63	64	65	66
1	±.015			67	68	69	70	71	72
1-1/4						73	74	75	76
1-1/2						77	78	79	80
1-3/4	±.020	For lengths above heavy line see note (g)					81	82	83
2							84	85	86
2-1/2	±.031								87
3									88

This Standard takes precedence over documents referenced herein.
Reference documents shall be of the issue in effect on the date of invitation for bid.

APPROVED 4 Jun 63 REVISED (A) 22 Dec 64

User: Army - GL

Reviewers: Army - EL, MI, MO, MU, WC
USAF - 69

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. Navy - WP	TITLE	MILITARY STANDARD
Other Cust Army - WC, USAF - 69	SETSCREW, HEXAGON SOCKET, CONE POINT, 250°F SELF LOCKING ELEMENT, CORROSION RESISTING STEEL, PASSIVATED	MS18068
PROCUREMENT SPECIFICATION FF-S-200 & MIL-F-18240	SUPERSEDES:	SHEET 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:14Z
Check the source to verify that this is the current version before use.