
NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP CLASS, 5310

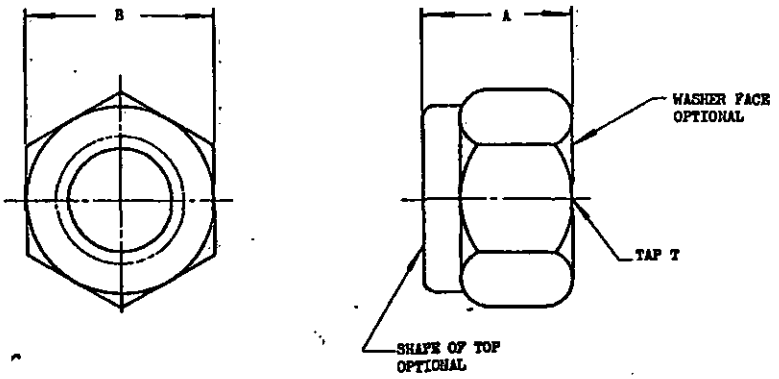

FINE THREAD (C)

DASH NUMBER STEEL	COPPER BASE ALLOY	AL ALLOY	TAP T	(a) A +.016 −.000	B +.002 −.010
-1032	B1032	D1032	NO. 10-32 NF-3B	.234	.375
- 428	B428	D428	1/4-28UNF-3B	.312	.438
- 524	B524	D524	5/16-24UNF-3B	.344	.500
- 624	B624	D624	3/8-24UNF-3B	.453	.563
- 720	B720	D720	7/16-20UNF-3B		.625
- 820	B820	D820	1/2-20UNF-3B	.594	.750
- 918	B918	D918	9/16-18UNF-3B	.688	.875
-1018	B1018	D1018	5/8-18UNF-3B	.750	.938
-1216	B1216	D1216	3/4-16UNF-3B	.875	1.063
-1414	B1414	D1414	7/8-14UNF-3B	1.000	1.250
-1614	B1614	D1614	1 -14 NF-3B	1.125	1.438
-1812	B1812	D1812	1- 1/8-12UNF-3B	1.250	1.625
-2012	B2012	D2012	1- 1/4-12UNF-3B	1.438	1.813

COARSE THREAD

- 440	B440	D440	NO. 4-40 NC-2B	.141	.250
- 632	B632	D632	NO. 6-32 NC-2B	.172	.312
- 832	B832	D832	NO. 8-32 NC-2B	.234	.344

(a) MINIMUM A NOT SPECIFIED. LIMITED ONLY BY STRENGTH REQUIREMENT OF SPECIFICATION.

ADD A AFTER DASH NUMBER FOR NUTS HAVING NONMETALLIC INSERTS.

ADD C AFTER DASH NUMBER FOR NUTS FABRICATED ENTIRELY FROM METAL.

EXAMPLES OF PART NUMBERS: MS20365-428 = 1/4-28 STEEL NUT, EITHER ALL METAL OR WITH NONMETALLIC INSERT.
MS20365D428 = 1/4-28 ALUMINUM-ALLOY NUT, EITHER ALL METAL OR WITH NONMETALLIC INSERT.
MS20365B428A = 1/4-28 COPPER-BASE-ALLOY NUT WITH NONMETALLIC INSERT.
MS20365-428C = 1/4-28 STEEL, ALL METAL NUT.

DIMENSIONS IN INCHES.

FOR INSTALLATION, SEE STANDARD MS33588.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(C) INTERCHANGEABILITY RELATION WITH AN365 PARTS: MS20365 PARTS AND AN365 PARTS OF LIKE DASH NUMBER ARE UNIVERSALLY, FUNCTIONALLY AND DIMENSIONALLY INTERCHANGEABLE.

(C) SHEET NO. 2 ADDED.

See also MS21042 MS21044

*SPECIFICATION AN-N-5 HAS BEEN SUPERSEDED BUT PRODUCTS HAVE NOT BEEN QUALIFIED UNDER THE SUPERSEDING DOCUMENT, SPECIFICATION MIL-N-25027

THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN. (C) FOR CHANGES SEE SHEET NO. 1.

APPROVED 3 Jan 57 — REVISED (A) 19 Feb 57 (B) 16 Apr 57 (C) 5 Sep 58

CUSTODIANS	OTHER INT.
Navy - BuAer Air Force	A - N - AF -

MILITARY STANDARD

NUT, SELF-LOCKING, 250°F

MS20365 (ASG)

PROCUREMENT SPECIFICATION	SUPERSEDES: AN365	SHEET 1 OF 2
*AN-N-5		

DSM 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:22Z
Check the source to verify that this is the current version before use.

bility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FINE THREAD

DASH NO.	FIIN	DASH NO.	FIIN	DASH NO.	FIIN	DASH NO.	FIIN	DASH NO.	FIIN	DASH NO.	FIIN
-1032		-1032A		-1032C		B1032		B1032A		B1032C	
-4428		-4428A		-4428C		B4428		B4428A		B4428C	
-5248		-5248A		-5248C		B5248		B5248A		B5248C	
-6248		-6248A		-6248C		B6248		B6248A		B6248C	
-720		-720A		-720C		B720		B720A		B720C	
-820		-820A		-820C		B820		B820A		B820C	
-918		-918A		-918C		B918		B918A		B918C	
-1018		-1018A		-1018C		B1018		B1018A		B1018C	
-1216		-1216A		-1216C		B1216		B1216A		B1216C	
-1 1/4 1/4		-1 1/4 1/4A		-1 1/4 1/4C		B1 1/4 1/4		B1 1/4 1/4A		B1 1/4 1/4C	
-1612		-1612A		-1612C		B1612		B1612A		B1612C	
-2012		-2012A		-2012C		B2012		B2012A		B2012C	

COARSE THREAD

-4420		-4420A		-4420C		B4420		B4420A		B4420C	
-632		-632A		-632C		B632		B632A		B632C	
-832		-832A		-832C		B832		B832A		B832C	

FINE THREAD

DASH NO.	FIIN	DASH NO.	FIIN	DASH NO.	FIIN
D1032		D1032A		D1032C	
D4428		D4428A		D4428C	
D5248		D5248A		D5248C	
D6248		D6248A		D6248C	
D720		D720A		D720C	
D820		D820A		D820C	
D918		D918A		D918C	
D1018		D1018A		D1018C	
D1216		D1216A		D1216C	
D1 1/4 1/4		D1 1/4 1/4A		D1 1/4 1/4C	
D1612		D1612A		D1612C	
D2012		D2012A		D2012C	

COARSE THREAD

D4420		D4420A		D4420C	
D632		D632A		D632C	
D832		D832A		D832C	

THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

CUSTODIANS	OTHER INT.	MILITARY STANDARD	MS20365 (ASG)
Navy - BuAer Air Force	A - N - AF -	NUT, SELF-LOCKING, 250°F	
PROCUREMENT SPECIFICATION *AN-N-5		SUPERSEDES:	SHEET 2 OF 2

NSC 672-1
1 62

APPROVED 5 Sep 58 | REVISED (C) FOR CHANGES SEE SHEET NO. 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:22Z
Check the source to verify that this is the current version before use.