FED. SUP CLASS
5320

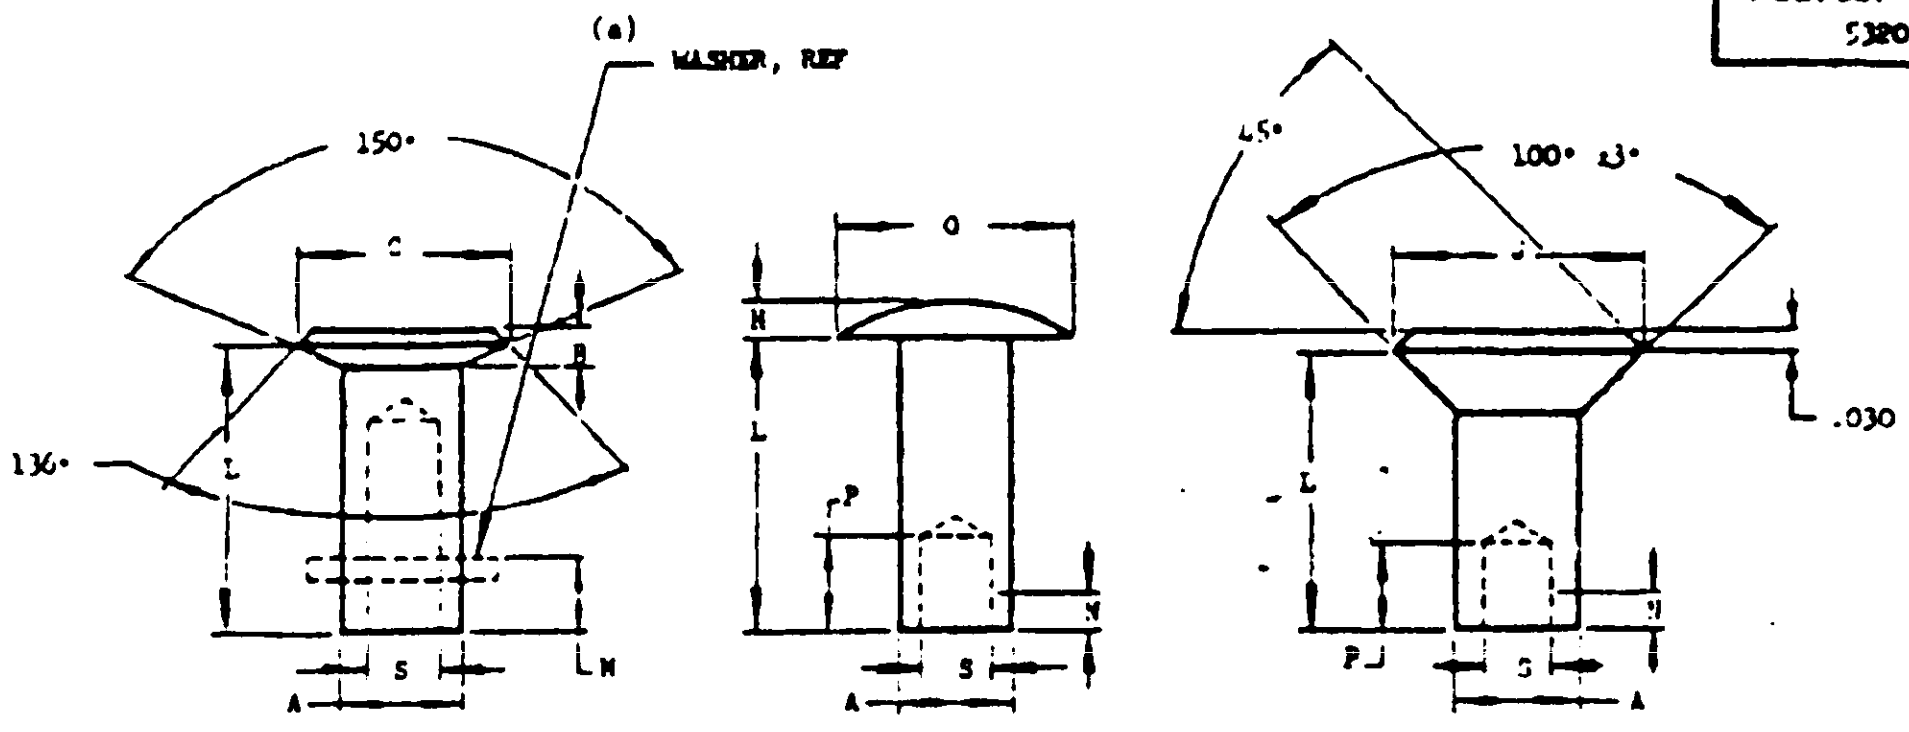

STYLE A
COPPER ONLY
DEEP DRILLED FOR LEATHER

STYLE C
OVAL HEAD
BRASS, MILD STEEL AND
ALUMINUM ALLOY ONLY

STYLE D
COUNTERSUNK HEAD
BRASS, MILD STEEL, MONEL
AND ALUMINUM ALLOY ONLY

SHALLOW DRILLED FOR METAL

DIA	(c) A ±.005 DIA	B	C DIA	G DIA	H ±.005	J DIA	(b) M	(b) N	P	S DIA MAX	S DIA MIN
3/32	.088			.141	.034			.062	.042	.066	.062
1/8	.121			.219	.033	.250				.088	.084
9/64	.14[illegible]	.047	.212			.312	.094		.125	.104	.099
3/16	.186		.259	.312	.065	.359	.125	.094		.137	.133

DIA	LENGTHS (L) AND DASH NUMBERS (FOR MILD STEEL)										
	1/8	5/32	3/16	7/32	1/4	9/32	5/16	3/8	7/16	1/2	5/8	3/4
3/32			6-6		6-8		6-10	6-12		6-16	6-20	
1/8	8-4	8-5	8-6	8-7	8-8	8-9	8-10	8-12	8-14	8-16	8-20	8-24
9/64	9-4	9-5	9-6	9-7	9-8	9-9	9-10	9-12	9-14	9-16	9-20	9-24
3/16	12-4	12-5	12-6	12-7	12-8	12-9	12-10	12-12	12-14	12-16	12-20	12-24

(a) USE WASHER AN960C14L ON 9/64 DIA, STYLE A RIVET.
AN960C316 ON 3/16 DIA, STYLE A RIVET.
(b) M AND N = RIVETING ALLOWANCE.
(c) SHANK DIAMETER TO BE MEASURED WITHIN .1 INCH OF FACE OF HEAD.
(d) PROCUREMENT SPECIFICATION IS APPLICABLE TO ALUMINUM-ALLOY RIVETS ONLY.
THESE RIVETS SHALL BE USED ONLY IN ACCORDANCE WITH THE RESTRICTIONS OF THE APPLICABLE AIR FORCE OR NAVY SPECIFICATIONS, OR HANDBOOKS ON THE DESIGN AND CONSTRUCTION OF AIRCRAFT.
MATERIAL: BRASS, SPECIFICATION QQ-W-321, GRADE [illegible]; MONEL, SPECIFICATION QQ-N-281, ANNEALED; 1010 OR 1015 MILD STEEL, OR [illegible]-1006 STEEL WIRE, SPECIFICATION QQ-W-409; COPPER, SPECIFICATION QQ-W-341; ALUMINUM ALLOY A17ST.
FINISH: MILD STEEL RIVETS SHALL BE CADMIUM PLATED, SPECIFICATION QQ-P-416, OR ZINC PLATED, SPECIFICATION QQ-Z-325.
PART NUMBERS SHALL SHOW STYLE LETTER BEFORE DASH NUMBER AND C FOR COPPER, B FOR BRASS, M FOR MONEL, OR AD FOR A17S-T4 ALUMINUM ALLOY BETWEEN THE DASH NUMBERS.
EXAMPLE OF PART NUMBERS: MS20450A12C8 = STYLE A, COPPER, 3/16 DIA, 1/4 LONG.
MS20450C12-8 = STYLE C, MILD STEEL, 3/16 DIA, 1/4 LONG.
MS20450C12B8 = STYLE C, BRASS, 3/16 DIA, 1/4 LONG.
MS20450D12AD8 = STYLE D, ALUMINUM ALLOY, 3/16 DIA, 1/4 LONG.
MS20450D12M8 = STYLE D, MONEL, 3/16 DIA, 1/4 LONG.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.
COMMERCIAL PRODUCT

INACTIVE FOR NEW DESIGN AFTER 1 FEBRUARY 1968 USE MS16535 AND MS16536

(C) STYLE A AND [illegible]
(C) STYLE [illegible]

[illegible]

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

Review activities:
USAF - 82,85

APPROVED 3 Jan 57 REVISED A 20 Aug 57, B 1 Feb 63, C 15 Oct 68

P.A. NAVY - [illegible] Other Cust USAF - 82	TITLE RIVET, [illegible]	**MILITARY STANDARD** **MS20450(ASG)**
PROCUREMENT SPECIFICATION (d) MIL-R-[illegible]	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 57 672-1 (Limited coordination)
ASD use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:23Z
Check the source to verify that this is the current version before use.