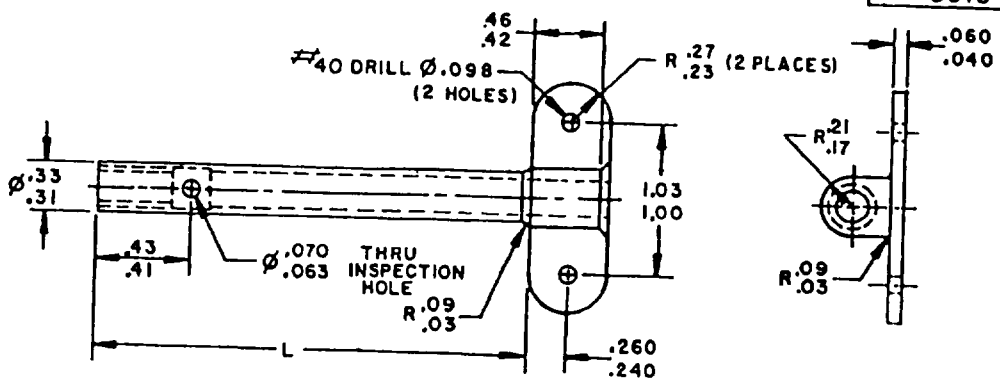
FED. SUP CLASS
5310



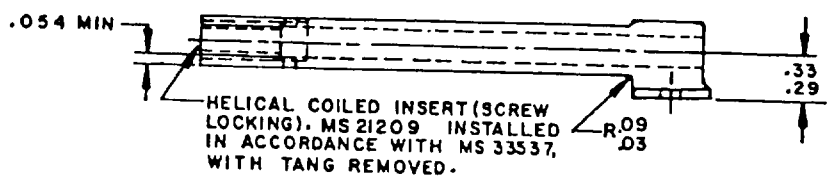


TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	THREAD SIZE HELICAL COILED INSERT
-04	.1120-40 UNJC-2B
-06	.1380-32 UNJC-2B
-08	.1640-32 UNJC-2B
-3	.1900-32 UNJF-2B

TABLE II. LENGTH SECOND DASH NUMBER

DASH NUMBER	L	DASH NUMBER	L ±.010	DASH NUMBER	L ±.020	DASH NUMBER	L ±.020	DASH NUMBER	L ±.020	DASH NUMBER	L ±.020
-2	.20 1/	-7	.70	-12	1.20	-17	1.70	-22	2.20	-27	2.70
-3	.30 1/	-8	.80	-13	1.30	-18	1.80	-23	2.30	-28	2.80
-4	.40 1/	-9	.90	-14	1.40	-19	1.90	-24	2.40	-29	2.90
-5	.50 1/	-10	1.00	-15	1.50	-20	2.00	-25	2.50	-30	3.00
-6	.60	-11	1.10	-16	1.60	-21	2.10	-26	2.60		

1/ NO INSPECTION HOLE REQUIRED

APPROVED 2 MAR 87 REVISED

P.A. AIR FORCE-99 Other Cust ARMY-AV NAVY-AS	INTERNATIONAL INTEREST	TITLE NUT, SELF-LOCKING, PLATE, SPACER, LIGHT DUTY	MILITARY STANDARD MS21449
PROCUREMENT SPECIFICATION MIL-N-25027	SUPERSEDES:		PAGE 1 OF 2

DD FORM 1 MAY 72 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5310-1470

USER ACTIVITIES: ARMY-AT, ER, ME, MI

REVIEWER ACTIVITIES: AIR FORCE-11 AIR FORCE-82 DLA-IS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:40Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5310

REQUIREMENTS:

1. MATERIAL: ALUMINUM ALLOY FORGING 2014-T6 (UNS A92014) IN ACCORDANCE WITH ASTM B209.
2. PROTECTIVE COATING: ANODIZE IN ACCORDANCE WITH MIL-A-8625, TYPE 1, CLASS 1, OR CHEMICALLY TREAT PER FED-STD-595 TO PRODUCE A COLOR INSPECTABLE FILM.
3. VIBRATION: VIBRATION REQUIREMENTS IN ACCORDANCE WITH MIL-I-8846
4. PART NUMBER: THE PART NUMBER CONSISTS OF THE BASIC MS NUMBER, FOLLOWED BY THE FIRST DASH NUMBER TAKEN FROM TABLE I, FOLLOWED BY THE SECOND DASH NUMBER TAKEN FROM TABLE II.

EXAMPLE: MS21449-08-2

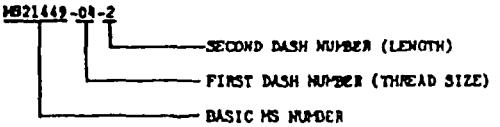

MS21449-08-2 INDICATES - NUT, SELF-LOCKING, PLATE, SPACER, HELICAL COILED INSERT THREAD SIZE, .1120-40 UNJC-2B, LENGTH .20.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. THE HELICAL INSERT AND SPACER PLATE SHALL FORM ONE INTEGRAL UNIT.
3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
4. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
5. NO QPL SHALL BE ESTABLISHED.

USER ACTIVITIES:
ARMY-AT,ER,ME,MI

REVIEWER ACTIVITIES:
AIR FORCE-11
AIR FORCE-82
DLA-IS

APPROVED 2 MAR 87 REVISED

P.A. AIR FORCE-99 Other Cust ARMY-AV NAVY-AS	INTERNATIONAL INTEREST	TITLE NUT, SELF-LOCKING, PLATE, SPACER, LIGHT DUTY	MILITARY STANDARD MS21449
PROCUREMENT SPECIFICATION MIL-N-25027	SUPERSEDES:		PAGE 2 OF 2

DD FORM 1 MAY 72 6721 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5310-1470

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:40Z
Check the source to verify that this is the current version before use.